




BEAL

GB

PROCESS UNICORE



An astonishing process, bonding rope sheath and core without affecting the rope's suppleness.

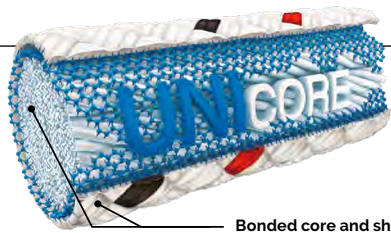

Bonded core and sheath


Even in the hardest conditions of use sheath slippage is suppressed. If the sheath is cut or torn, core and sheath remain bonded together.

With a standard rope, if the sheath is cut by abrasion over an edge, a frequent occurrence in work at height and in rescues, it slides and gathers over some metres. It then becomes impossible to pass this zone, either to ascend or to descend. If the problem occurs near to the end of the rope the sheath may slide off completely, and the user may fall to the ground.


With the UNICORE process the sheath remains in place and the user may escape, either by descent or ascent, taking all necessary precautions. He/she is not stuck without a solution on the rope.




The UNICORE process brings an undeniable gain in security during delicate and dangerous operations ; its advantages are many:

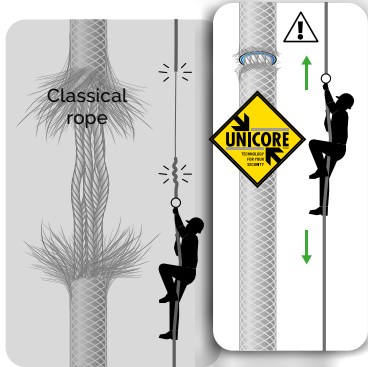


It allows escape if the sheath has been cut.

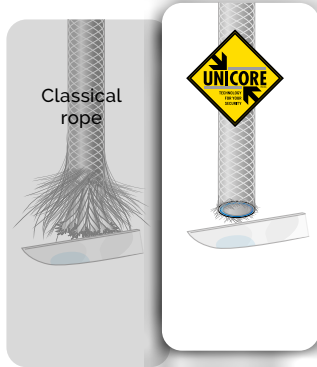

It allows temporary cutting of rope lengths with a knife, without melting the ends, without fraying of the sheath.

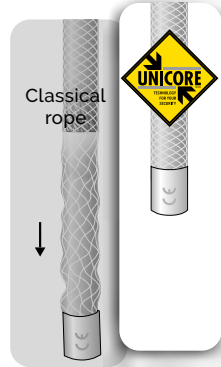

It prevents sheath slippage.


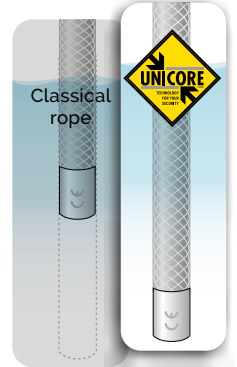


It reduces shrinkage in water by more than 50 %.

BCC BEAL COLOR CODE



Beal slings and lanyards have a seam that, depending on the colour, identifies the year the product is made.



The colour of the internal thread identifies the year of manufacture.

BEAL inspect PPE MANAGEMENT

www.beal-inspect.com

No matter the size of your organization, BEAL inspect adapts to your needs and meets the legal identification, inspection and management requirements of your business :

1. Inspect equipment with ease, directly on the ground.
2. Save results in just 3 clicks through the « Fast Record » system.
3. Share results with inspectors in a secure cloud.





News..... 4-7

Work restraint, work position,
fall arrest, suspension..... 8-9

Notions of falling for work at height 10-11

Anchor, breaking load
& rope protectors..... 12-13

Verticality..... 14-29

Work restraint..... 14-15
Short-term work on roof 16-17
Work on roof with collective protective equipment 18-19
Fall arrest & work positioning 20-21
Suspension : access the workstation 22-23
Suspension : descent & work..... 24-25
Ski lift evacuation 26-27
Work in specific environments..... 28-29

Performances chart..... 30-39

Ropes..... 30-32
Webbing, flat slings, anchor 33
Lanyard..... 34
Harness..... 35-36
Helmet..... 36
Connector..... 37
Quick links, rigging plates and swivel, pulleys..... 38
Descenders, fall arrest, rope clamps..... 39

Equipment..... 40-67

Ropes for difficult area access..... 40-41
Universal rope to both Standards EN 892 & EN 1891... 42
Floating rope & rope for difficult area access..... 42
Dynamic ropes..... 42
Rescue ropes..... 43
Ropes resistant to high temperatures 44
Ropes resistant to chemical products..... 44
Lightweight ropes 45
Special ropes 45
Ropes for tree work..... 46
Ropes for prusiks..... 47
Retention ropes..... 47
Accessory cords..... 48
Webbing..... 48
Flat slings..... 48
Anchors..... 49
Adjustable lanyards..... 50-51
Not adjustable lanyards..... 52
Fall arrest lanyards 53
Fall arrest harness 54
Fall arrest, rope access and work positioning harness .. 55-58
Rescue harness..... 59
Harness accessories..... 59
Helmet..... 60-61
Locking connector 62
Quick links..... 63
Pulleys 63
Rigging plates and swivel..... 63
Descenders..... 64
Fall arrest 65
Rope clamps..... 66
Bags..... 67
Work station..... 68-69
Kits..... 70
Rope protector..... 70
Gloves..... 71
Accessories..... 71



DYNAPRO FIT I & DYNAPRO FIT V

EN358

NEW2021



Dynapro Fit V
Double progression and adjustable rope lanyard, light and compact.

Recommended karabiner on the adjuster and at the end of the lanyard: Be Link Bi Matic



+
Precise and fast length adjustment.

+
Easy unlocking with the adjuster's lever.

+
Used in pairs, it allows to make all kinds of progression (on rope, aid climbing, across horizontal lifeline with intermediate anchors...).

SOFT AIR KIT

EN 353-2

NEW2021

100% textile fall protection kit developed for work on fragile surfaces in a vertical or inclined environment.




1 BE LOCK 3MATIC karabiner to connect the rope to the anchor point.



1 8mm VOLCANO Prusik acting as a rope clamp.



1 O'LIGHT 3MATIC to connect to the harness.



10m rope length, 11mm in diameter with two sewn terminated rope endings.

KIT FALL ARREST

NEW2021



=



+



Fall arrest Kit 10m STYX

- 1 carry bag
- AIR KIT
 - Industrie 11 mm
 - 1 Be Lock 3 Matic
 - 1 Monitor
 - 1 Mobile Lanyard
 - 2 O'light 3 Matic
- Styx rescue



=



+



Fall arrest Kit 10m STYX FAST

- 1 carry bag
- AIR KIT
 - Access UNICORE 11 mm
 - 1 Be Lock 3 Matic
 - 1 Monitor
 - 1 Mobile Lanyard
 - 2 O'light 3 Matic
- Styx fast

SWANIE LINE EN 358, EN 12841, EN 795 B/C, TS16415 (multi user : 2)

NEW 2021

Adjustable anchor allowing a versatile solution on 11mm rope :


Work positioning at the workstation, two possible implementations :

Between the operator's ventral point and the anchorage point of the structure above it. (EN358, 12841C)



Work positioning at the workstation, two possible implementations :

Doubled : to position comfortably at the workstation, for example by passing around a suitable anchor and attaching the two ends of the SWANIE LINE to the lateral attachment points of the harness. (EN358)

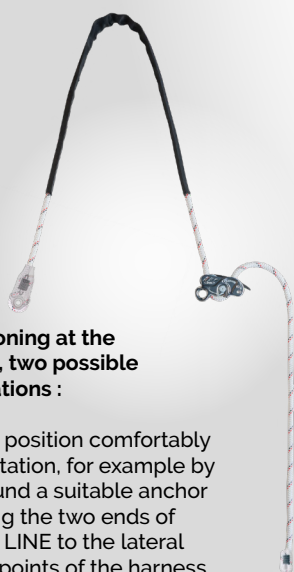

+
The ergonomic shape of the SWANIE handle allows for a quick and precise adjustment.

+
Tubular sleeve to protect the rope.

+
The rope can be replaced when it is worn out. A simple 6-sided key is enough.

+
In anchor configuration, two simultaneous users are allowed.

In temporary anchor use, two possible implementations:

Anchoring : adjusting to the desired length of the SWANIE LINE around a structure (EN795B).



In temporary anchor use, two possible implementations:

Horizontal lifeline : adapting to the length required between two anchors (EN795C).



ROOF ANCHOR EN 795A

NEW 2021

Discreet metal anchor for roofing. Light, discreet, attached directly to the wooden frame, the ROOF ANCHOR is an ideal anchor on the roof.

+
Durable thanks to its stainless-steel cable.



+
Only 2 screws to set it up.



+
Almost invisible on a roof.

SOLACE

EN 361 / EN 358 / EN 813 (140 kg)

NEW2021

Harness for work positioning, suspension and fall arrest.



On the front area, shoulder straps spread out with clearance at the neck. This clearance is enhanced by the use of narrowed webbing.



A quick release buckle on one shoulder strap allows for easy fitting without deregulating the harness.



Adjustable front leg risers between leg loops and waist belt for precise adaptation to morphology.



On each shoulder there is a reusable fuse loop for storing the connectors of the fall arrest lanyards. In the event of a fall the stored lanyard will release allowing the fall arrest lanyard to uninterruptedly absorb energy.



Adjustable rear leg risers between leg loops and waist belt for better adaptation to morphology when using the rear dorsal attachment.



SOLACE HOLD UP

NEW2021



Harness for work positioning, suspension and fall arrest perfectly configured for rope access.

Very effective at ascending ropes thanks to the low position of the HOLD UP and its parallel orientation to the body.

MOOR

EN795A / EN959

NEW2021

STEEL

STAINLESS STEEL 316 L



MOOR steel 10 mm

MOOR steel 12 mm

MOOR stainless steel 10 mm

MOOR stainless steel 12 mm

MOOR BOLT steel 10 mm

MOOR BOLT stainless steel 10 mm

MOOR BOLT stainless steel 12 mm

Bent hanger with a large opening to facilitate the karabiner clipping and a vertical shifted anchor point. Raised dots at the back of the hanger prevent it from turning.

BE LINK BI MATIC

EN 12275 Ⓟ / EN 362 B

Asymmetrical aluminium connector for lanyards or for use with belay devices. The asymmetrical shape helps to guide the device towards the connector's apex.

Available in 3 versions : screw, double action (Bi-Matic) or triple action (3-Matic).

NEW2021



QUANTUM

EN 397

NEW 2021

Light helmet featuring an ABS shell with a polystyrene liner for optimal energy absorption in case of impact. Its chinstrap opens between 15 and 25 daN in order to avoid strangulation. Certified EN 397.



+
Certified against lateral deformation and low temperature: -40°C.

+
Its setting up is extremely easy and user friendly.



QUANTUM VISOR

Eye visor compatible with QUANTUM and QUANTUM ELEC helmets. This visor can be protected from scratches with a visor protector.



+
Very good ventilation thanks to its 8 openings. The position and the shape of the opening prevent from letting the water in.

+
2 different systems to use a headlamp:
- 4 hooks to attach the headlamp's band
- 2 dedicated slots (1 in the front, 1 in the back) to slide in the headlamp.



QUANTUM V PROTECT

Visor protector, compatible with QUANTUM VISOR for QUANTUM and QUANTUM ELEC helmets. Avoids the visor from scratching when it is not in use.



QUANTUM STICKERS



QUANTUM NECK PROTECT

Textile neck protector compatible with QUANTUM and QUANTUM ELEC helmets. Its covering shape protects from the sun and rain.



QUANTUM CARD HOLDER

QUANTUM ELEC

EN 397 + EN 50365

NEW 2021



Certified EN 397 and EN 50365 against electrical hazards.



BE LOCK

Symmetrical aluminium screw gate connector with large capacity and opening to accommodate multiple items. Its generous loading surface and HMS shape facilitate its use with Clove and Italian hitches.

BE LINK

Asymmetrical aluminium connector for lanyards or for use with belay devices. The asymmetrical shape helps to guide the device towards the connector's apex.



SCREW

3 MATIC




SCREW

3 MATIC




WORK RESTRAINT

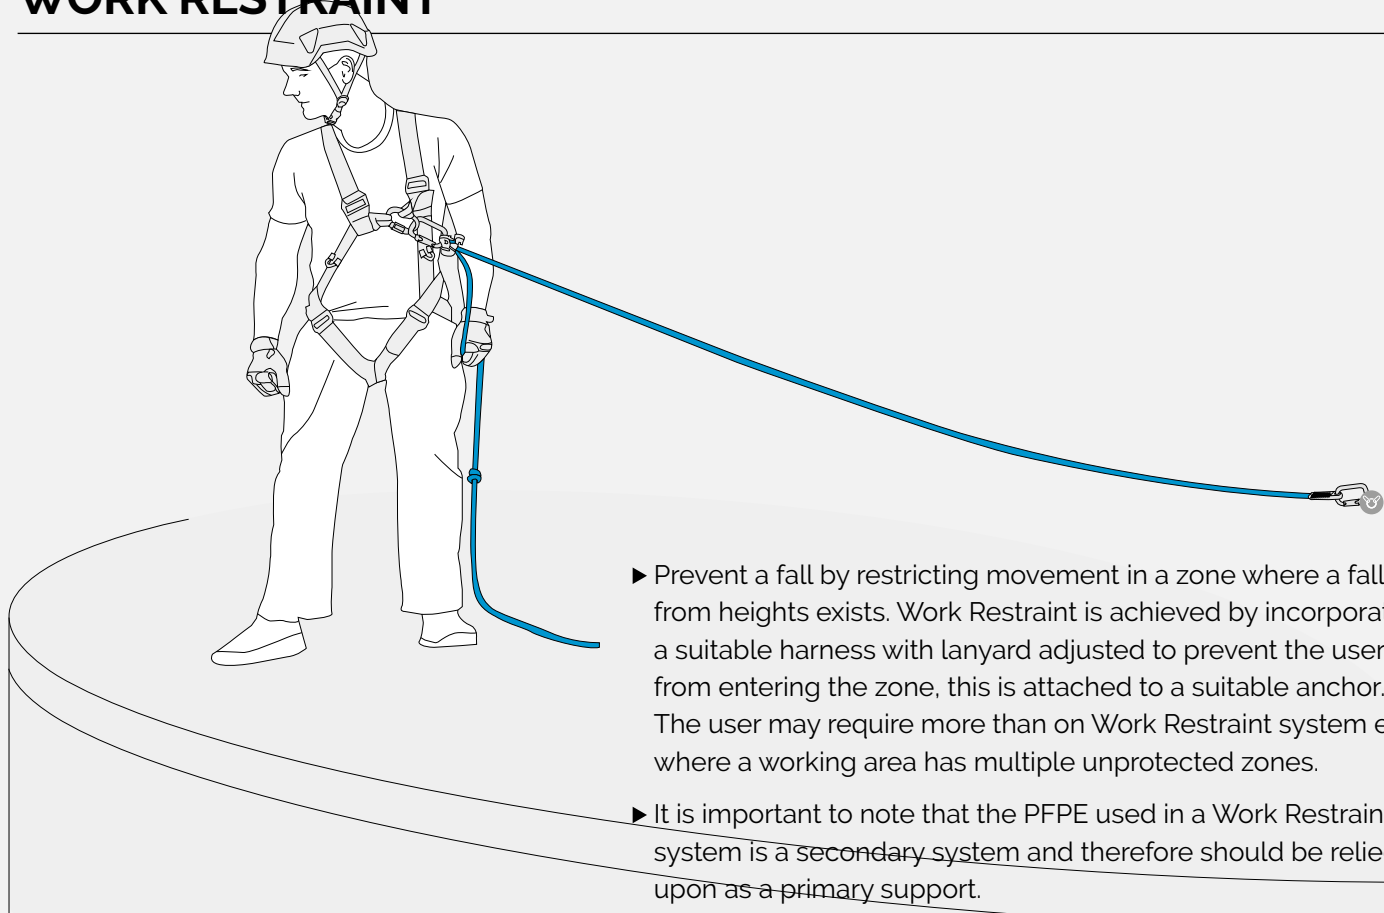


WORK POSITION

- ▶ Allows a user to be supported at work station.
- ▶ The system must be attached to a suitable anchor.
- ▶ The user is standing on his feet and the system always under tension.
- ▶ A fall arrest system must be added to the work positioning system.

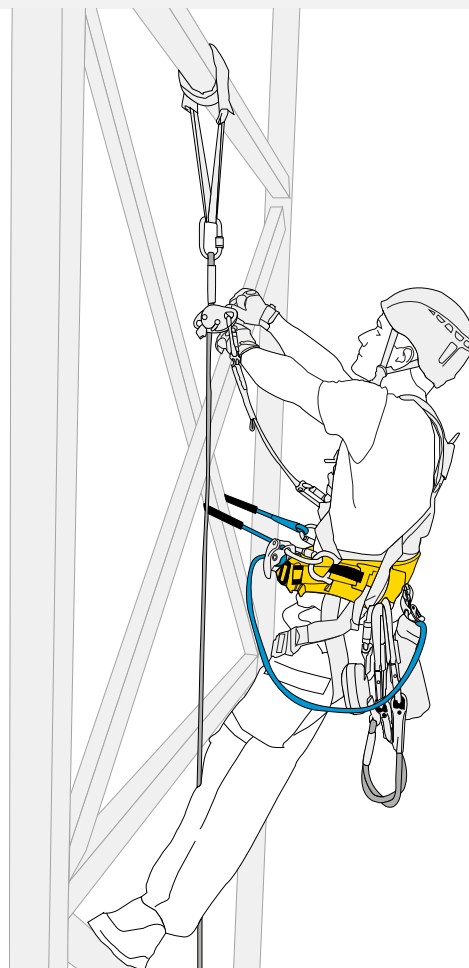


FALL ARREST

- ▶ Allows a user to enter a zone where a fall from height exists. This is achieved by incorporating a Fall Arrest harness with energy absorbing lanyard which is connected to a suitable anchor limiting the impact force generated during a freefall.
- ▶ It is important to note that the PFPE used in a fall arrest system is a secondary system and therefore should be relied upon as a primary support.

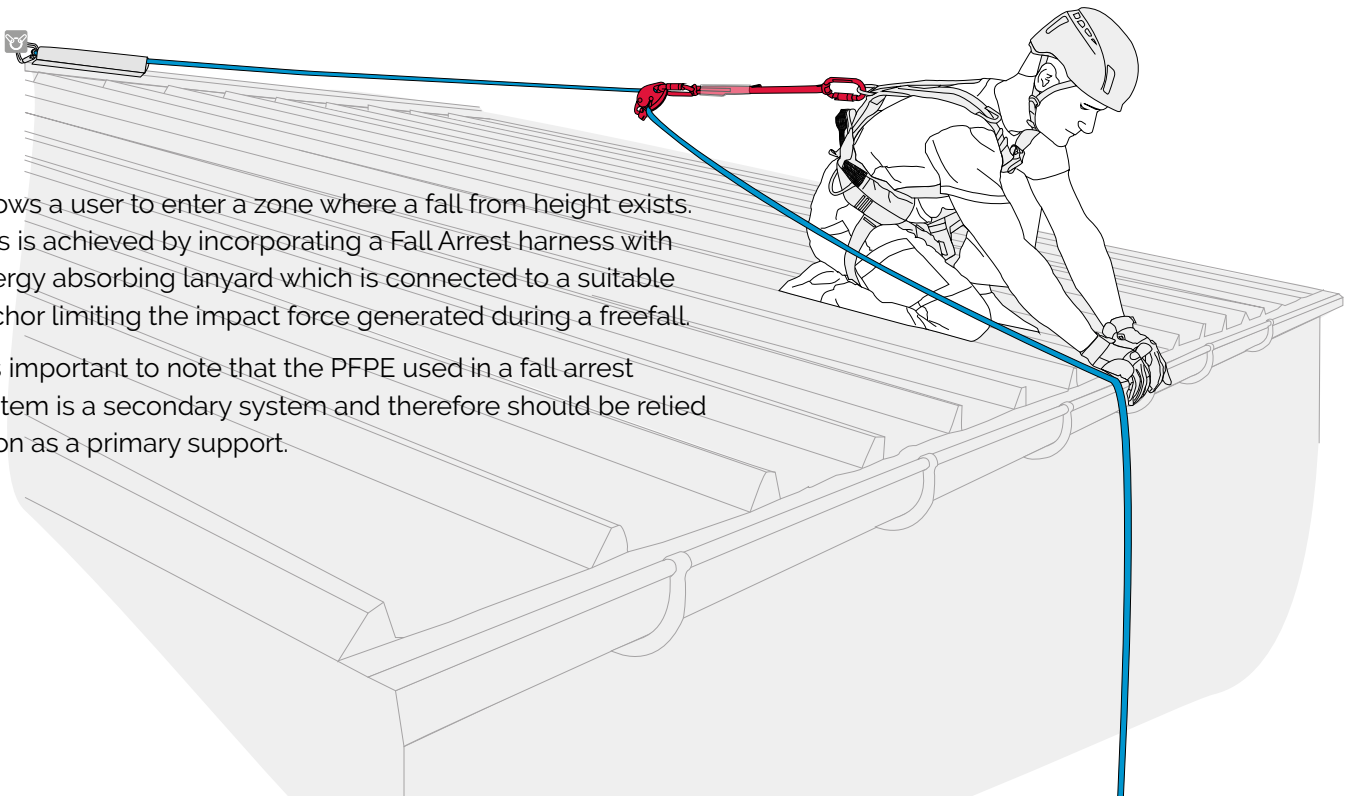

SUSPENSION

- ▶ When the user is not anymore standing on his feet, the harness he is suspending in, has to comply with 3 standards : work positioning (EN 358), fall Arrest (EN 361) and suspension (EN 813).

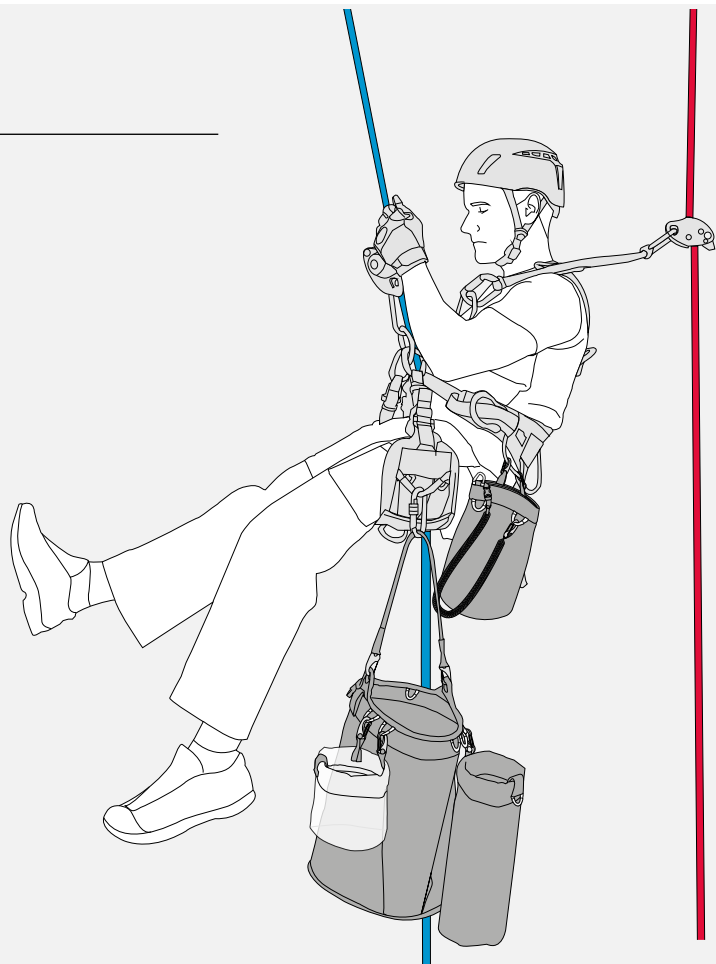

NOTIONS OF FALLING FOR WORK AT HEIGHT

The height of the fall :

The longer the fall distance, the greater the energy to dissipate to avoid too violent a shock.

The height of the anchorage :

The operator should always avoid climbing above the anchor point in order to limit the fall factor.

The weight of the operator with their equipment :

The larger the mass, the greater the energy to be absorbed.

FALL FACTOR



Some examples with 100kg and lanyard without energy absorber.

ZERO FALL FACTOR

The lifeline is located 1 metre above the attachment point.

$$\frac{0 \text{ m fall}}{1 \text{ m lanyard}} = \text{factor } 0$$

Impact Force < 6kN

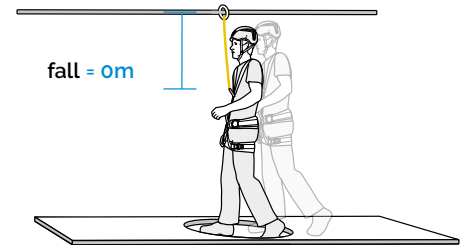
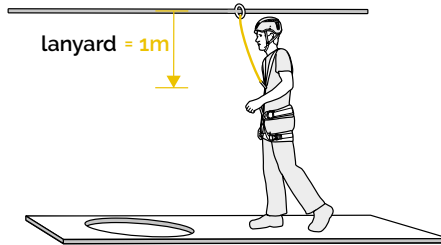


DANGER FALL FACTOR

The lifeline is located at the point of attachment.

$$\frac{1 \text{ m fall}}{1 \text{ m lanyard}} = \text{factor } 1$$

⚠ Impact Force > 6kN

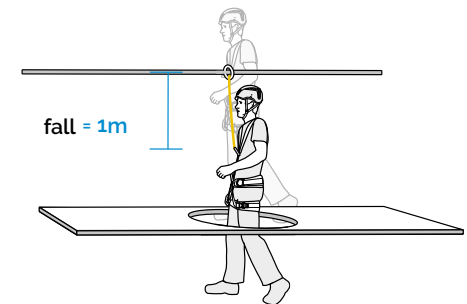
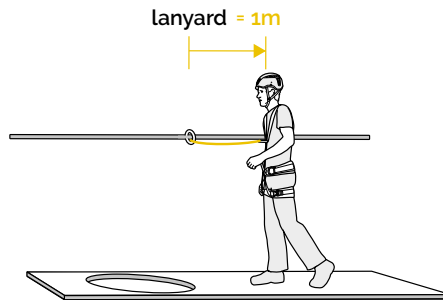


CRITICAL FALL FACTOR

The lifeline is located 1 metre below the attachment point.

$$\frac{2 \text{ m fall}}{1 \text{ m lanyard}} = \text{factor } 2$$

☠ Impact Force > 6kN

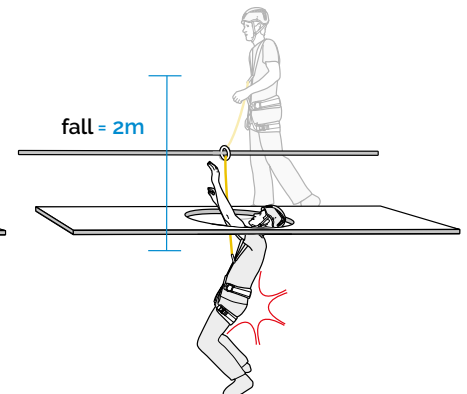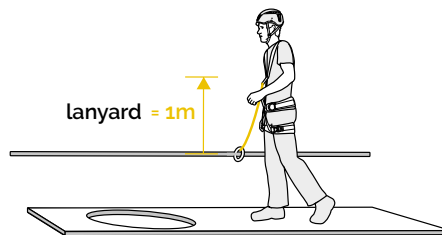

The impact force :

This is the impact suffered by the operator once the anti-fall system has absorbed some of the energy from the fall. In high-level work, the anti-fall system (energy absorber, mobile fall control, etc.) limits the impact force to 6kN for a mass of 100kg.

Any system other than that of anti-fall, does not absorb enough energy from a fall, whatever the factor (e.g. lanyard for restraint).

GROUND CLEARANCE


Some examples with 100kg and lanyard with an energy absorber.

CALCULATING GROUND CLEARANCE


The ground clearance is the space needed under the feet of the worker so that they do not encounter the ground during a fall.

Even with a fall control system you can put yourself in danger during a fall.



During a fall, the absorber will deploy to dissipate the energy, if the worker does not provide sufficient distance with an obstacle located below them, they will endanger themselves.

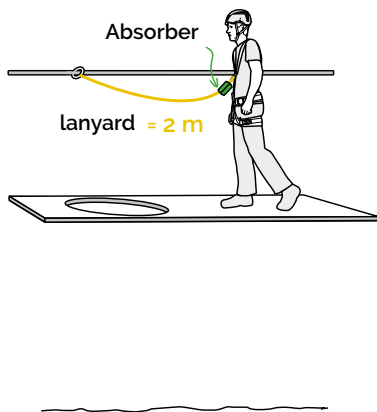


Ground Clearance = 5,90 m

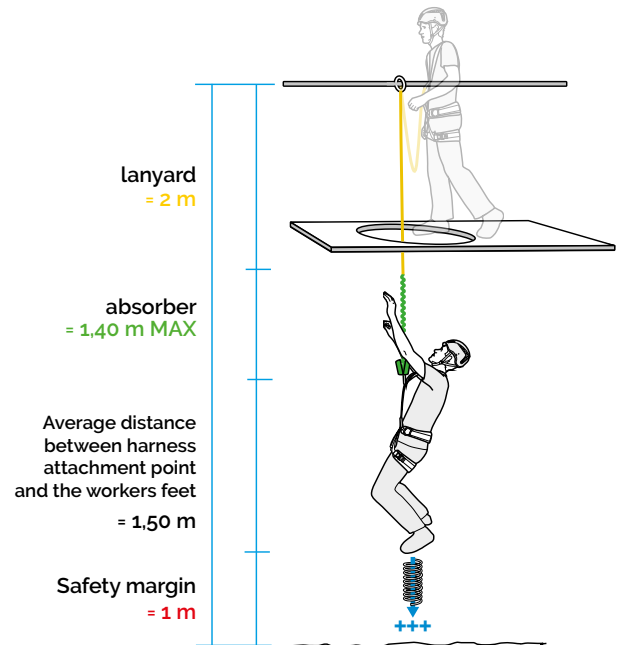


WARNING IN CASE OF AN OBSTACLE

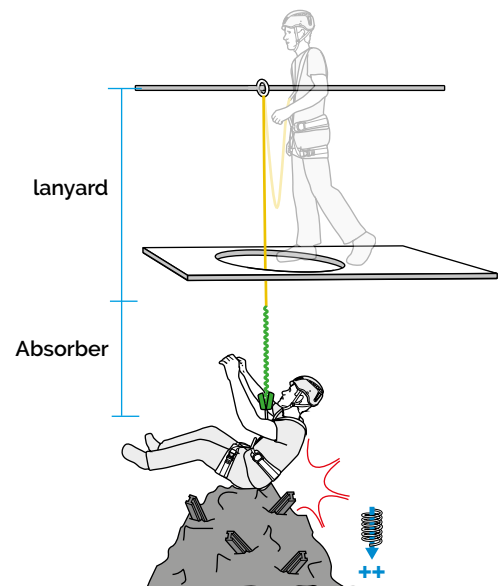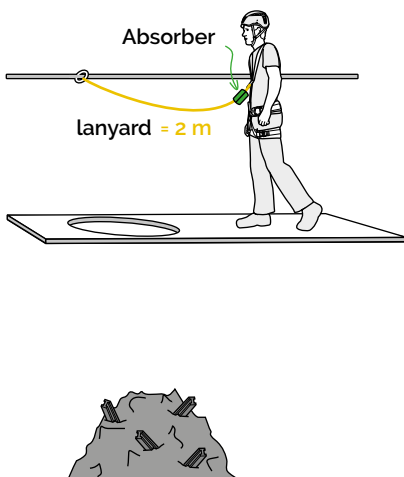


ANCHOR DEVICE CONFIGURATION

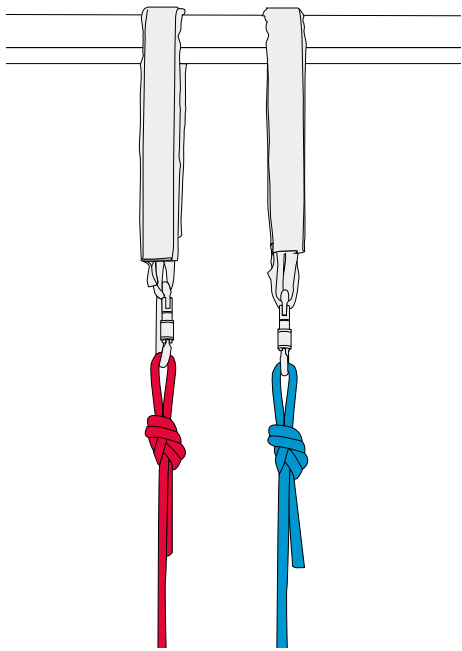

Basic anchor

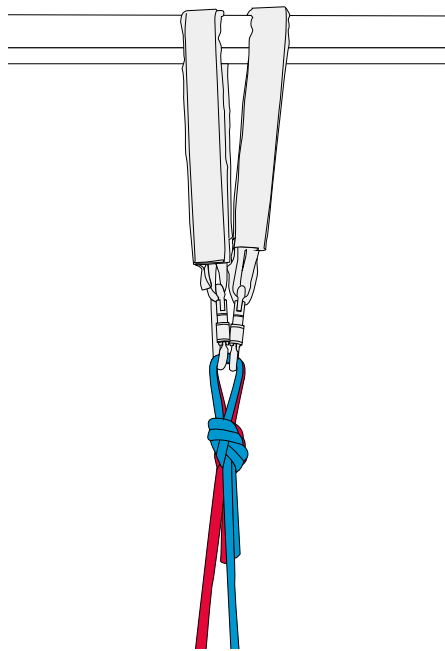


Symmetrical anchors shared for added security

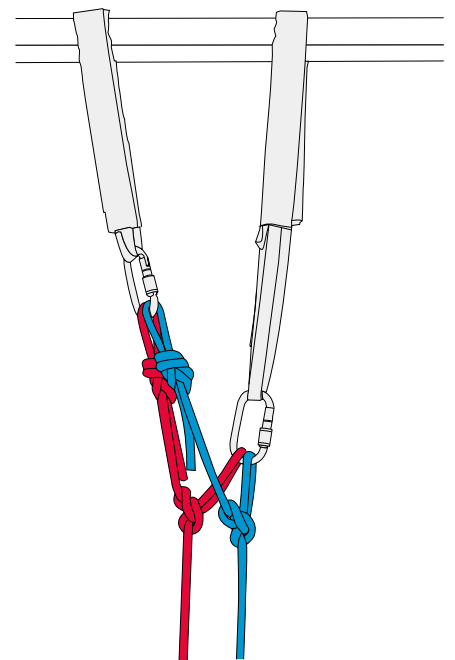


Asymmetrical anchors shared for added security

BREAKING LOAD, SLING 18 mm : 22 kN

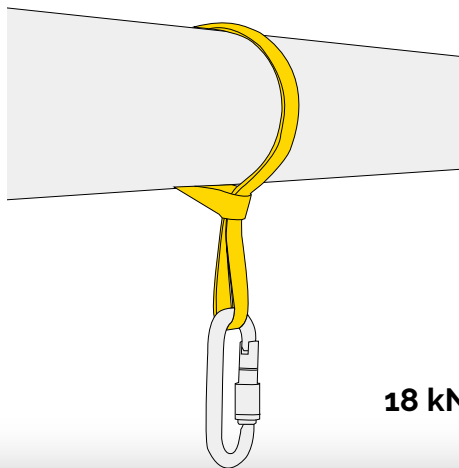


18 kN

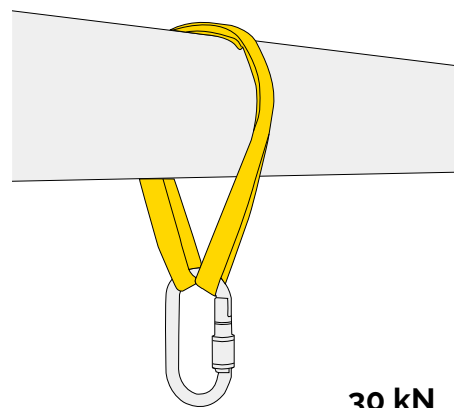



30 kN

ANCHOR FOR ROOFING



≥ 12 kN

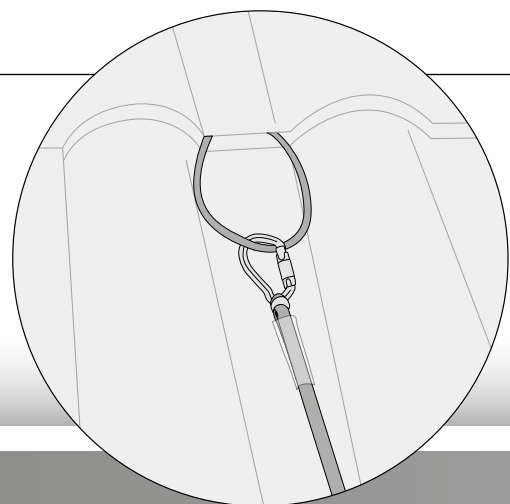



ROPE PROTECTORS

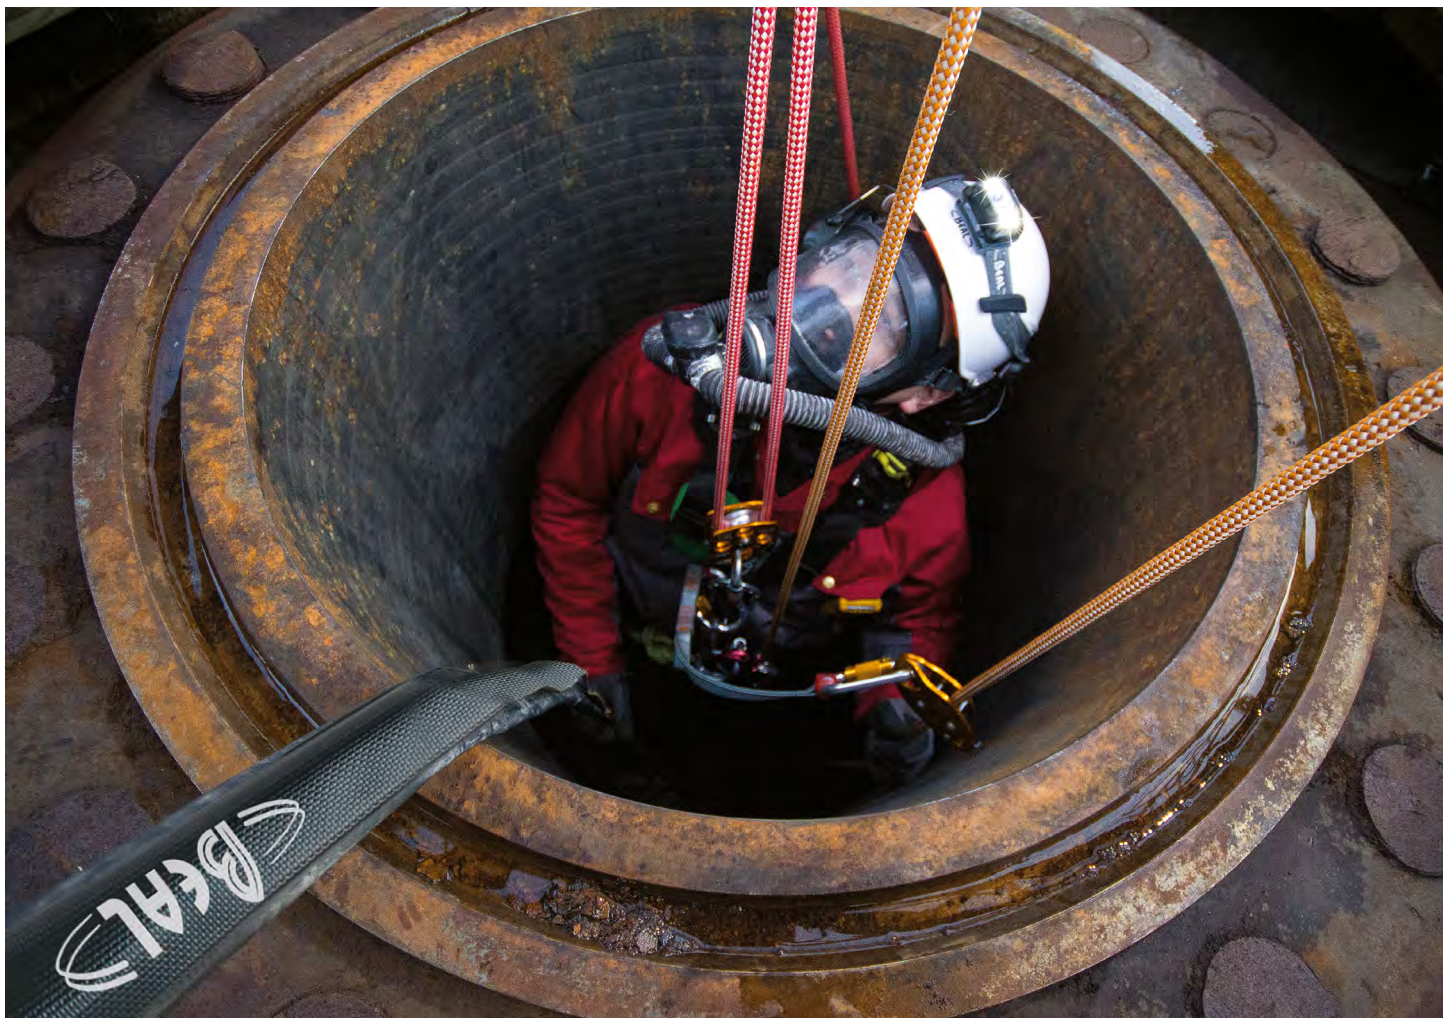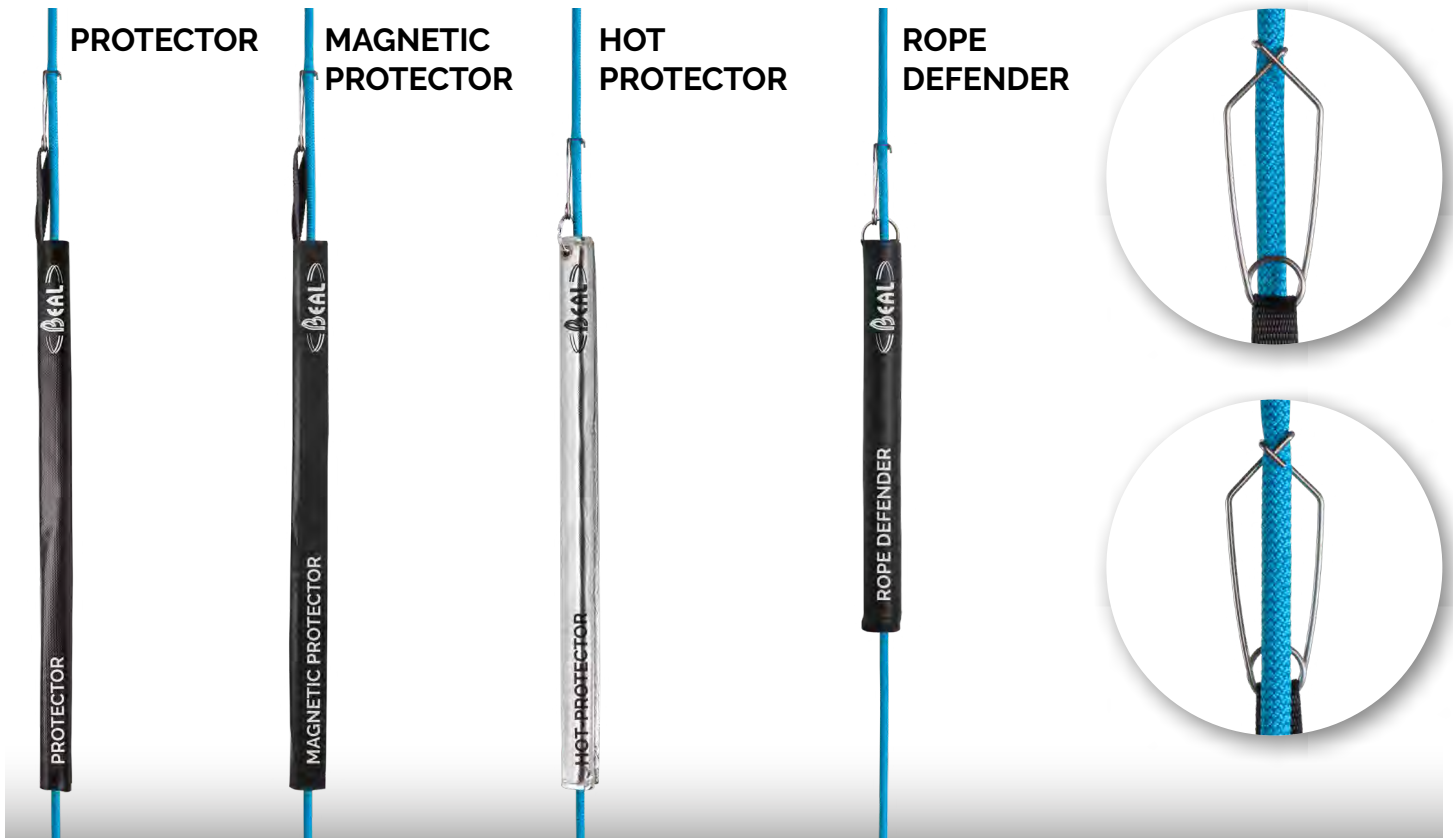

NOT ADJUSTABLE WORK RESTRAINT

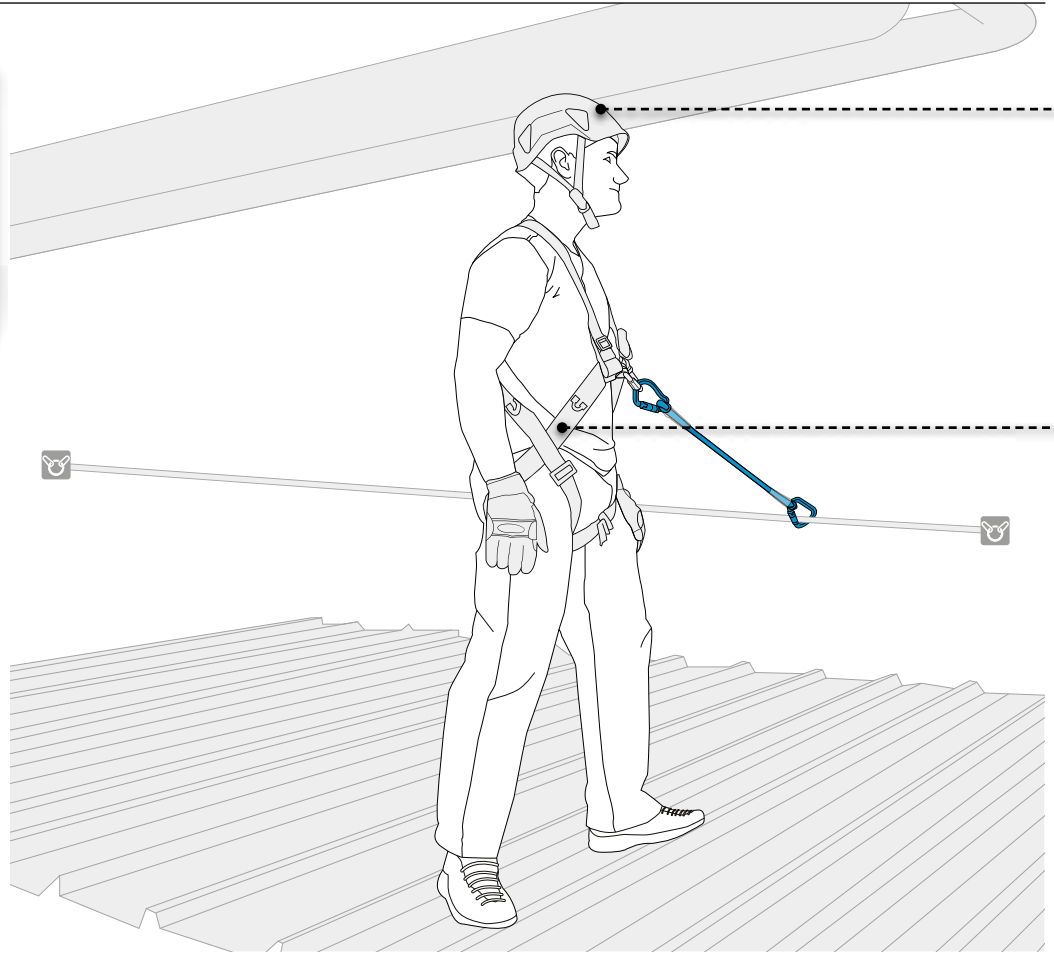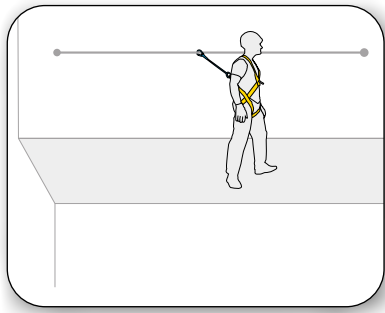

ADJUSTABLE WORK RESTRAINT

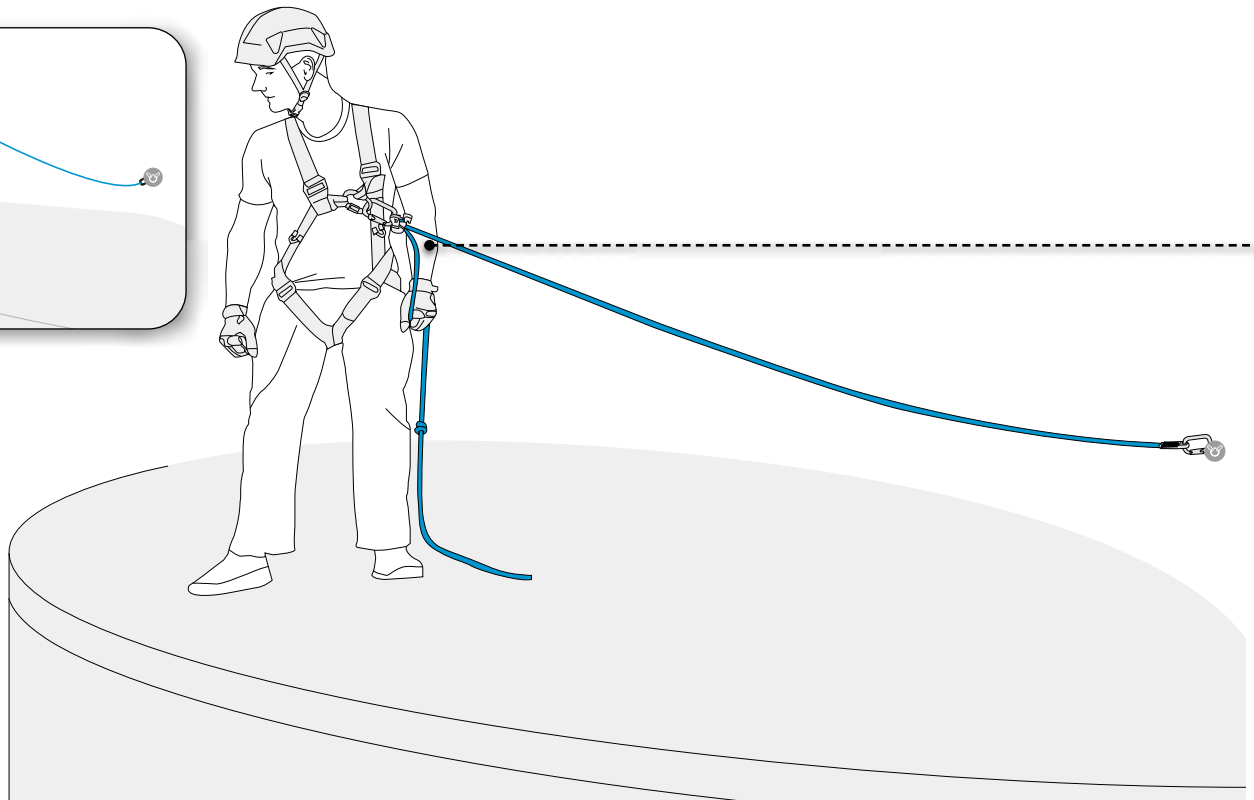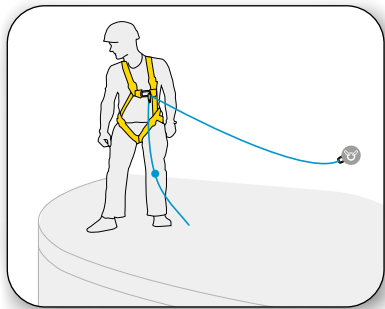


QUANTUM p 60

NEW2021




STYX RESCUE p 54

Lightweight and compact fall arrest harness with two attachment points: 1 sternal and 1 dorsal.

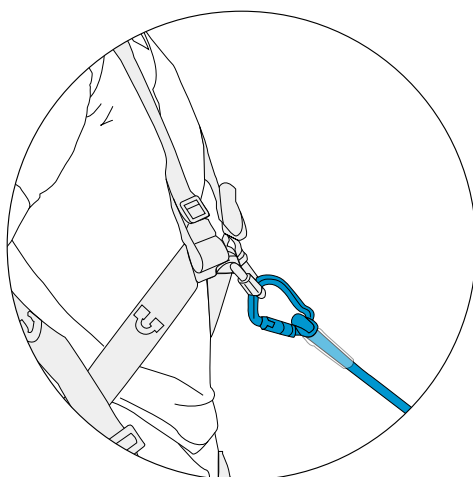

DYNAPRO p 52


Simple dynamic rope lanyard with sewn termination for work restraint. The dynamic characteristics of this lanyard are far superior to those of a traditional static lanyard.

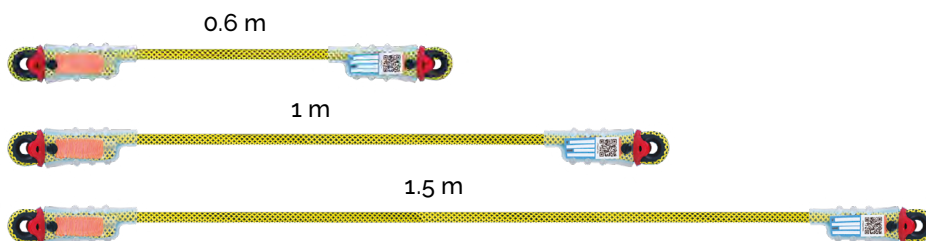



SWANIE LINE p 50

NEW2021

Adjustable anchor allowing a versatile solution on 11mm rope :
 - Adjustable lanyard to maintain comfortable and accurate position at the workstation.
 - Temporary anchor.

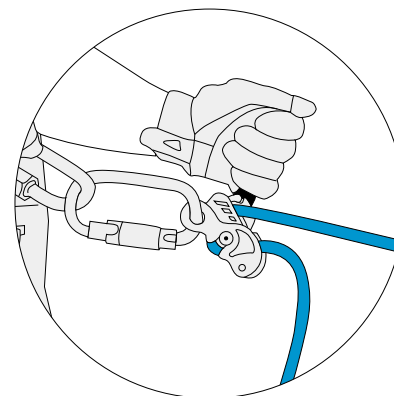

STERNAL ADJUSTMENT OF SWANIE LINE

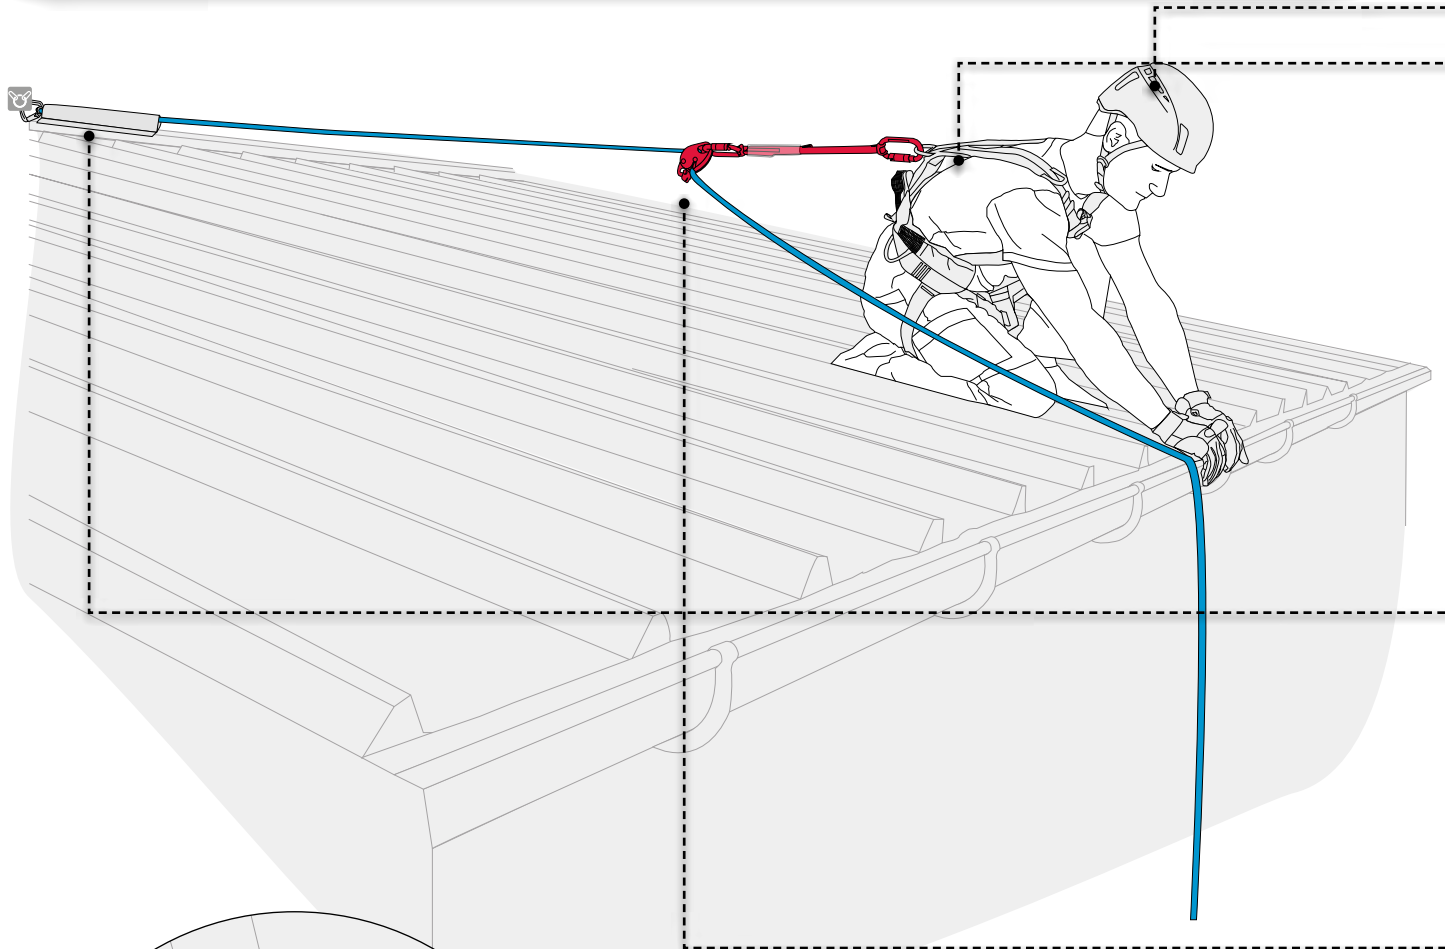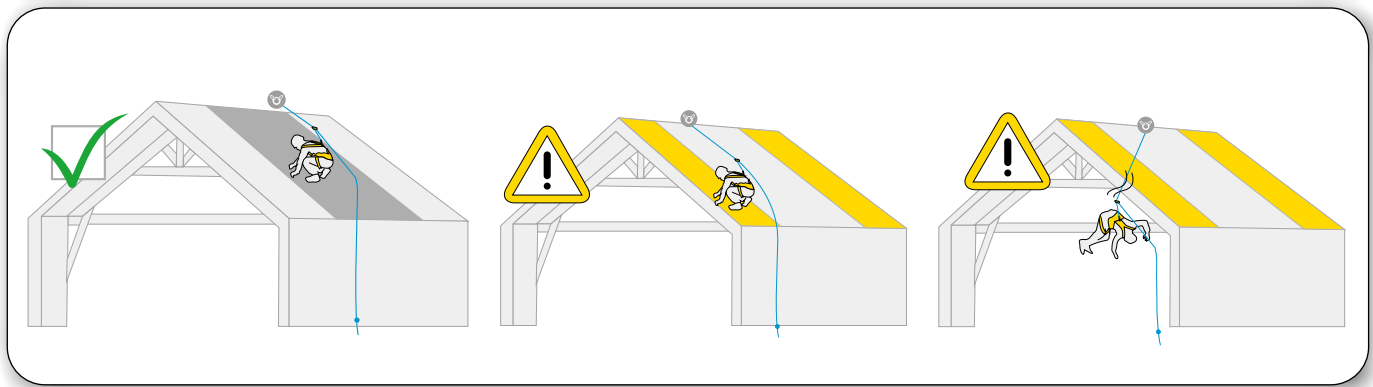

ANCHOR FOR ROOFING

ROOF ANCHOR p 49

NEW2021

Discreet metal anchor for roofing. Light, discreet, attached directly to the wooden frame, the ROOF ANCHOR is an ideal anchor on the roof.

STRENGTHS :

- › Only 2 screws to set it up.
- › Almost invisible on a roof.
- › Durable thanks to its stainless-steel cable.



MERCURY p 61



Hybrid helmet featuring an ABS shell with a polystyrene liner.



PROTECTOR p 70

A rope can wear very rapidly over a sharp edge. To protect it, use the PROTECTOR, an ultra-solid rope protector made of two layers of coated material.



0.7 m



STYX FAST p 54

A very light and compact fall arrest harness with 2 connection points : 1 sternal and 1 dorsal. Quick release buckles to the thighs and a foamed back allow a quick sitting. Versatile because it can be combined with a work position belt.


FAST BUCKLE HOOK BEAL




HOOK BUCKLE



SET UP :
Lock 2 actions





SET UP :
open 3 actions



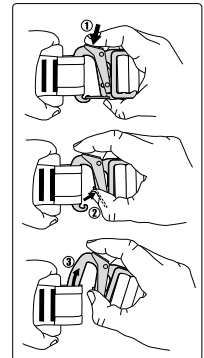


AIR-KIT 11 mm

Specific kit to create a mobile fall arrest system especially adapted to vertical work or work on inclined surfaces.

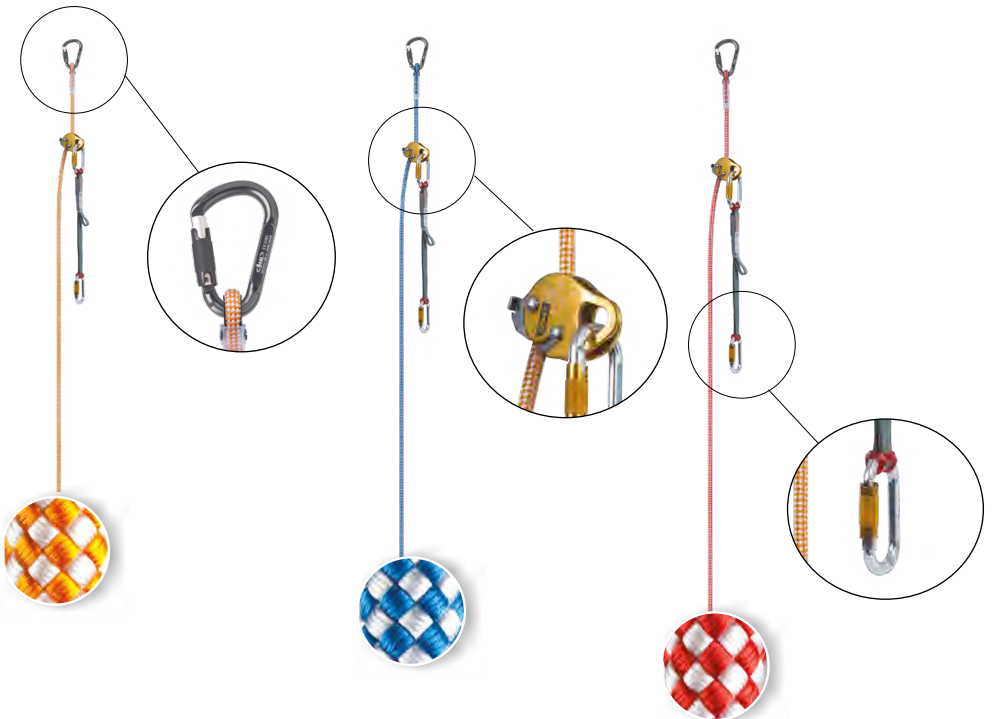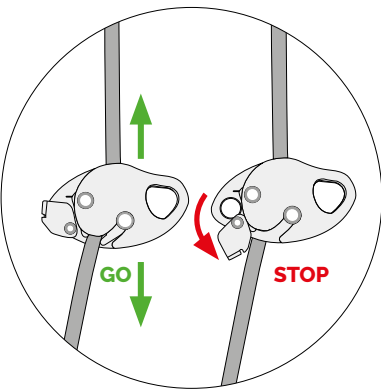


WORK ON ROOF WITH COLLECTIVE PROTECTIVE EQUIPMENT

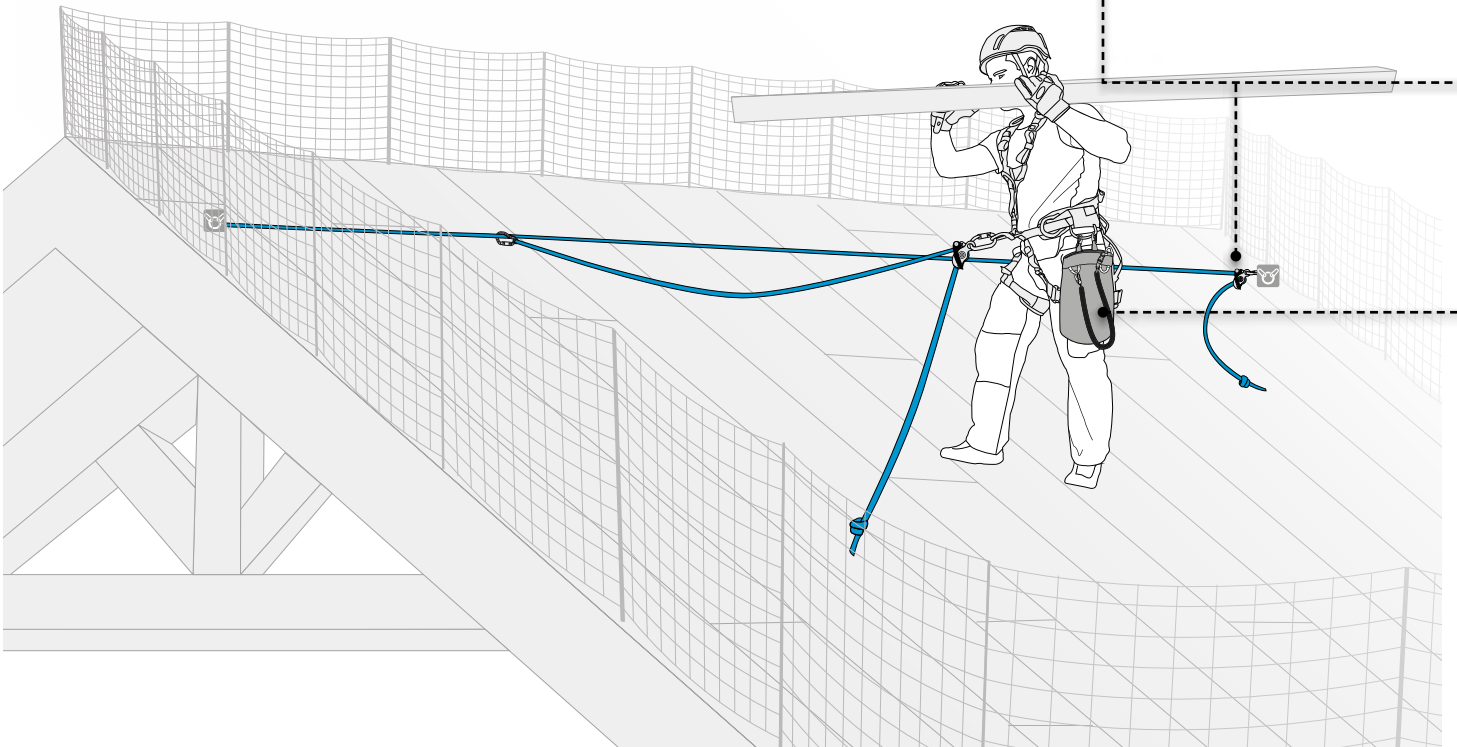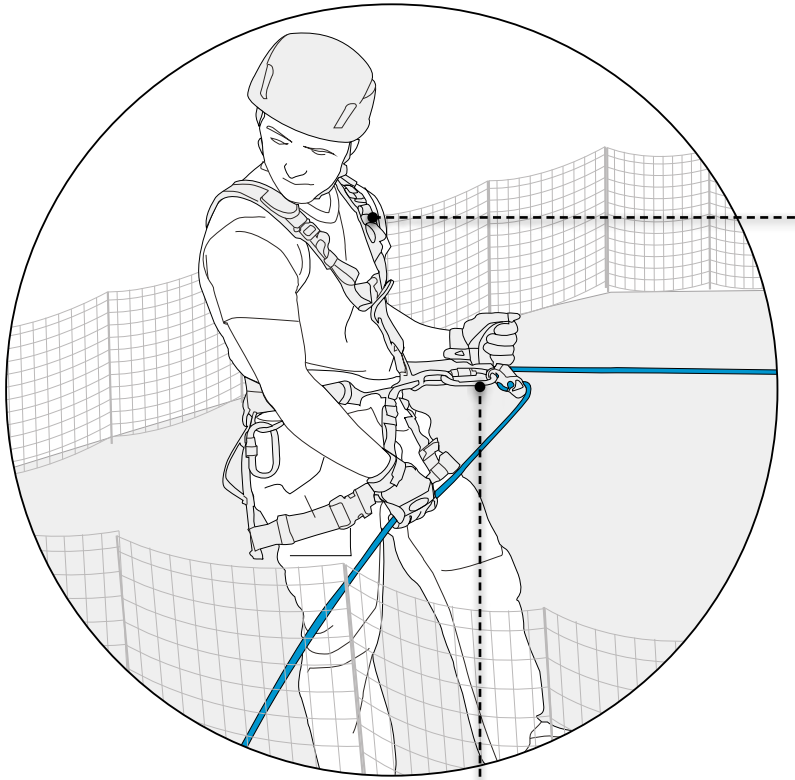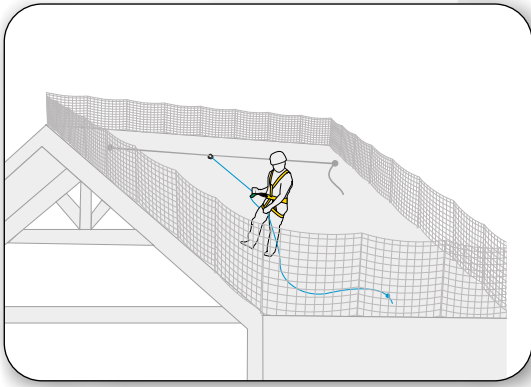

SOLACE p 56

Harness for work positioning, suspension and fall arrest.

NEW2021

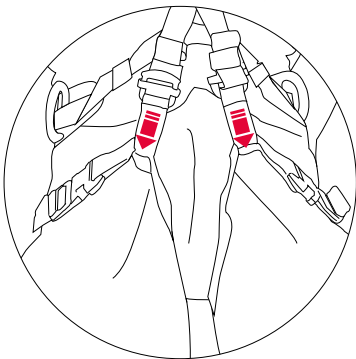

SOLACE LEGS ADJUSTMENT

SWANIE LINE p 50



NEW2021

Adjustable anchor allowing a versatile solution on 11mm rope :

- Adjustable lanyard to maintain comfortable and accurate position at the workstation.
- Temporary anchor.



Recommended karabiner on SWANIE LINE : BE LINK BI MATIC.

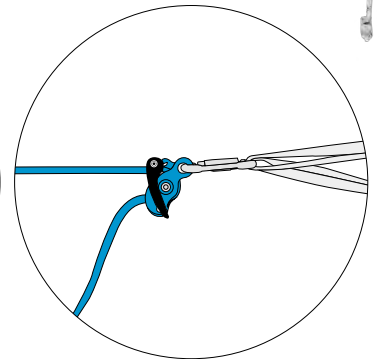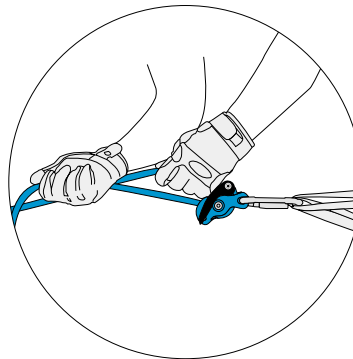

SWANIE ADJUSTMENT

WORK STATION p 68-69

TOOL BUCKET TOOL BUCKET L



GLASS BUCKET



GENIUS TOOL BUCKET




Example with Tool Bucket






AIR LEASH




SUPER LEASH



FALL ARREST & WORK POSITIONING

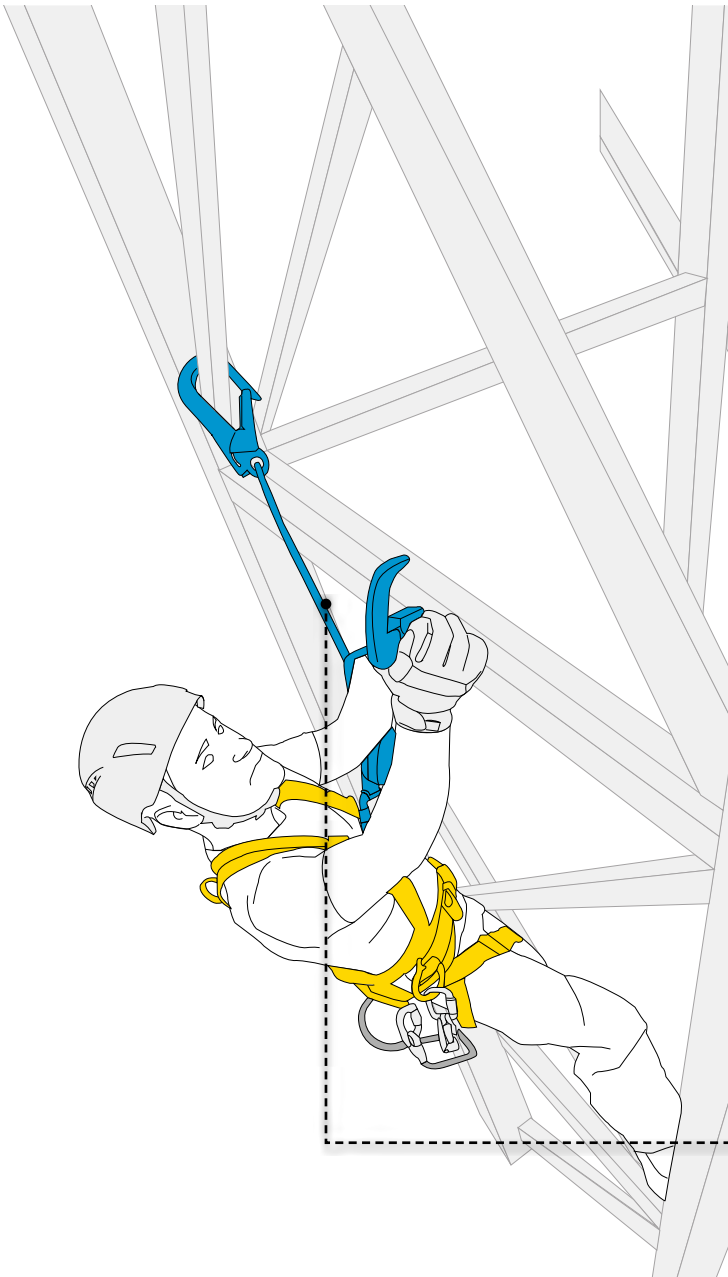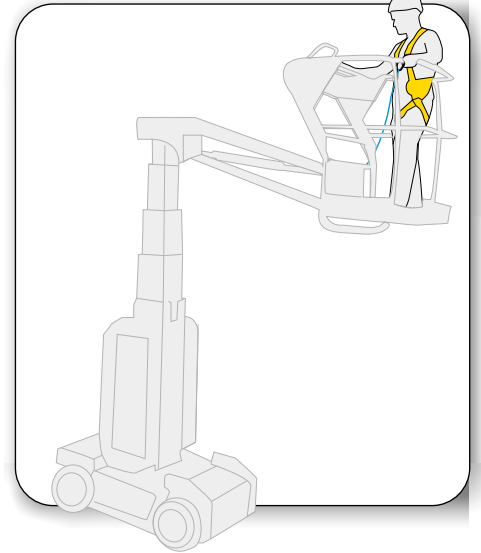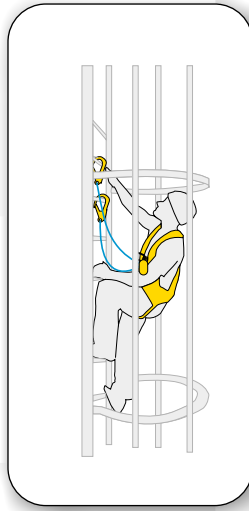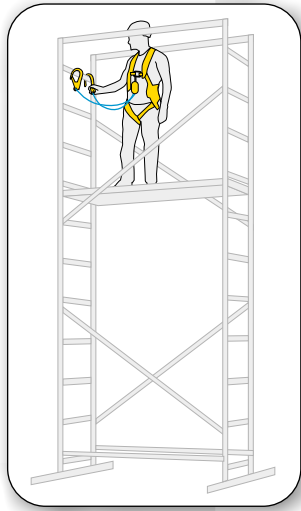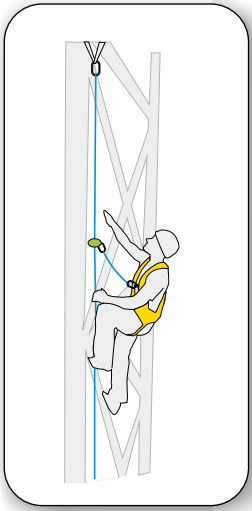

CLIMBING

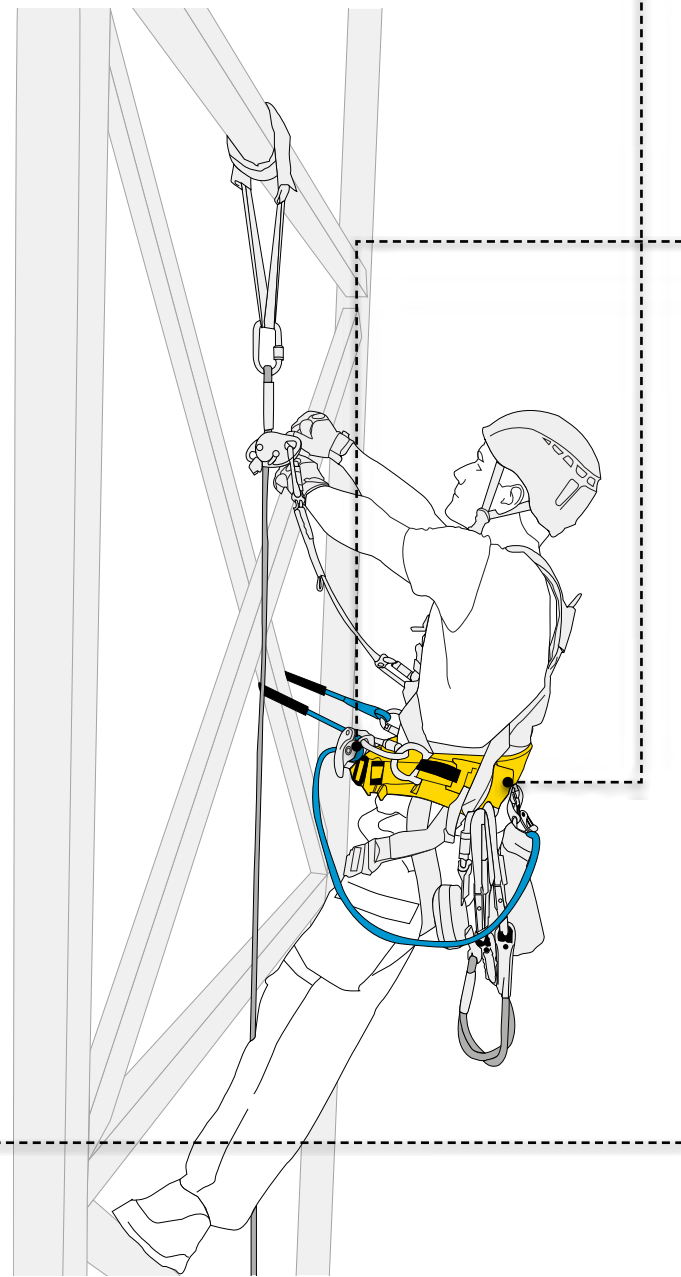

WORK POSITIONING


STYX FAST p 54

A very light and compact fall arrest harness with 2 connection points : 1 sternal and 1 dorsal. Quick release buckles to the thighs and a foamed back allow a quick sitting. Versatile because it can be combined with a work position belt.



STYX BELT p 54

Workstation belt. This adjustable belt makes it possible to adjust positioning rings to all morphologies or all situations by a simple sliding. The quick-release buckle offers a simple opening / closing. The belt is compatible with the STYX FAST harness.

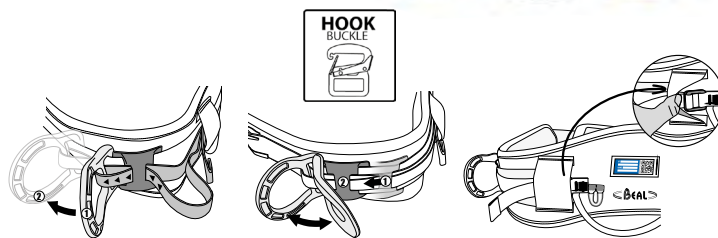

SWANIE LINE p 50

Adjustable anchor allowing a versatile solution on 11mm rope :


- Adjustable lanyard to maintain comfortable and accurate position at the workstation.
- Temporary anchor.



Recommended karabiner on SWANIE LINE : BE LINK BI MATIC.





NEW 2021

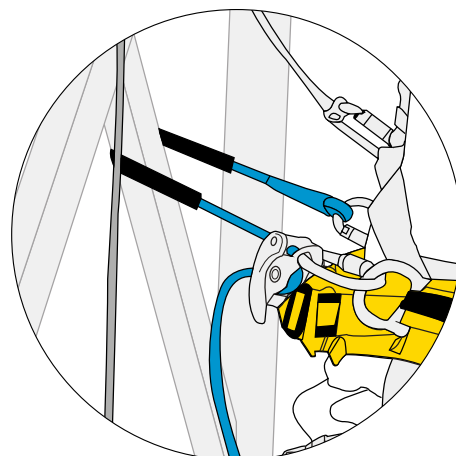

DYNAPRO-AIR V HOOK p 53


V-shaped fall arrest lanyard with integrated energy absorber (EN355 + EN362). Designed as a progression lanyard for work environments with a fall risk, it is well adapted to structures where anchor points are cables, bars or beams.

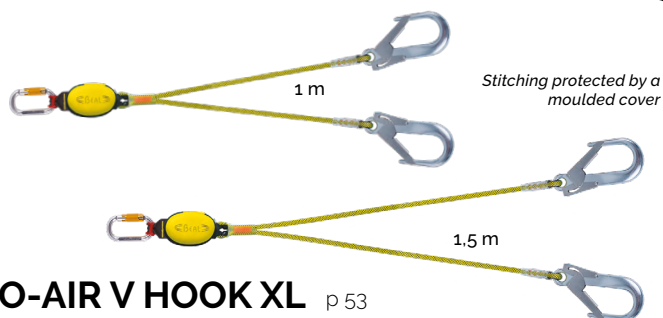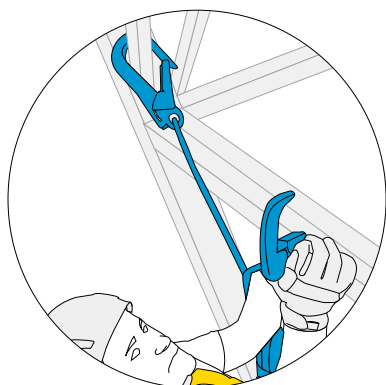



Stitching protected by a moulded cover

DYNAPRO-AIR V HOOK XL p 53

V-shaped fall arrest lanyard with integrated energy absorber (EN355 + EN 362). Designed as a progression lanyard for work environments with a fall risk, the size of its connectors make it particularly suited to metal structures.

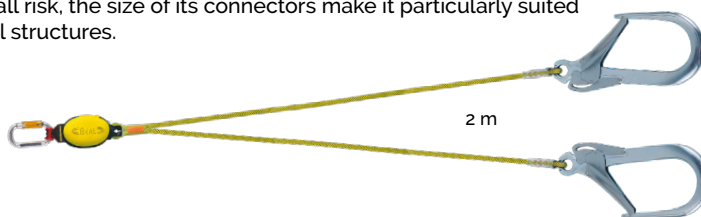

SUSPENSION : ACCESS TO THE WORKSTATION

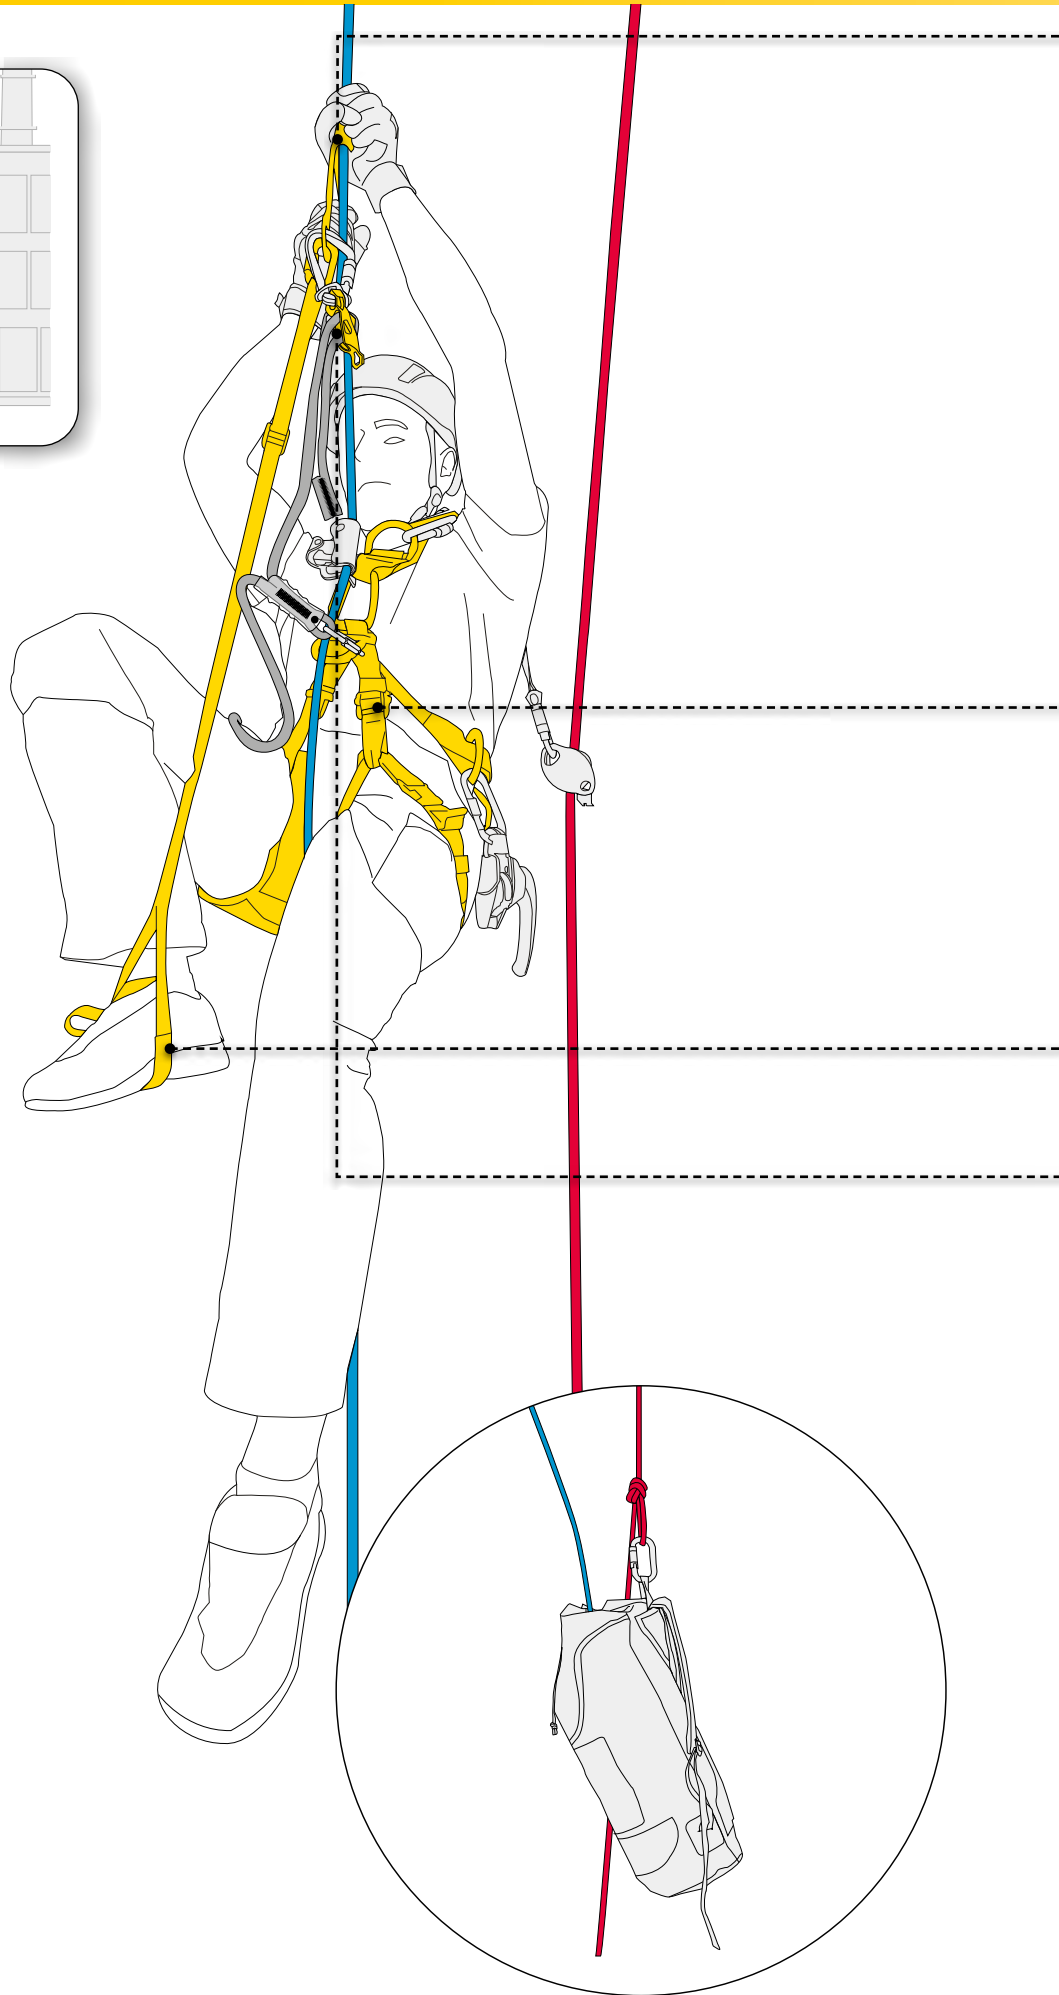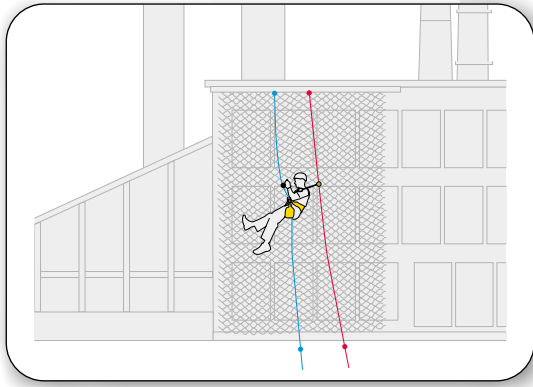


SOLACE HOLD UP p 56

NEW2021




Harness for work positioning, suspension and fall arrest perfectly configured for rope access. Very effective at ascending ropes thanks to the low position of the HOLD UP and its parallel orientation to the body.






HANDS UP p 66

Handled ascender with ergonomic design to aid rope ascents with one or two hands.

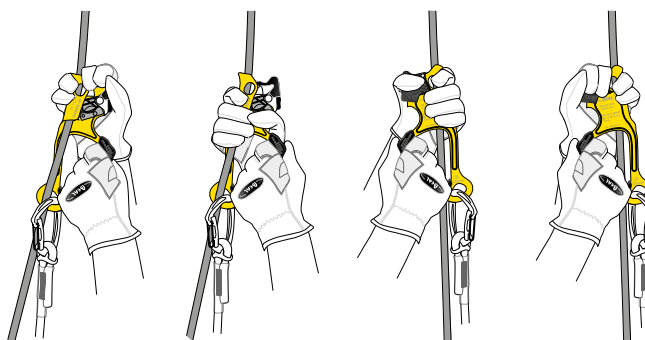

AIR-STEP p 66

Adjustable footloop with quick adjusting system around the foot for ascending fixed ropes with an ascender.



DYNAPRO FIT V p 51



NEW2021

Dynapro Fit V
Double progression and adjustable rope lanyard, light and compact.

Recommended karabiner on the adjuster and at the end of the lanyard: Be Link Bi Matic.

ACCESS 11 mm p 40

With UNICORE as standard, bonding core and sheath for maximum security in all situations.







INDUSTRIE 10,5 mm p 40

This rope is specially adapted to the requirements of work at height companies.




SUSPENSION : DESCENT & WORK

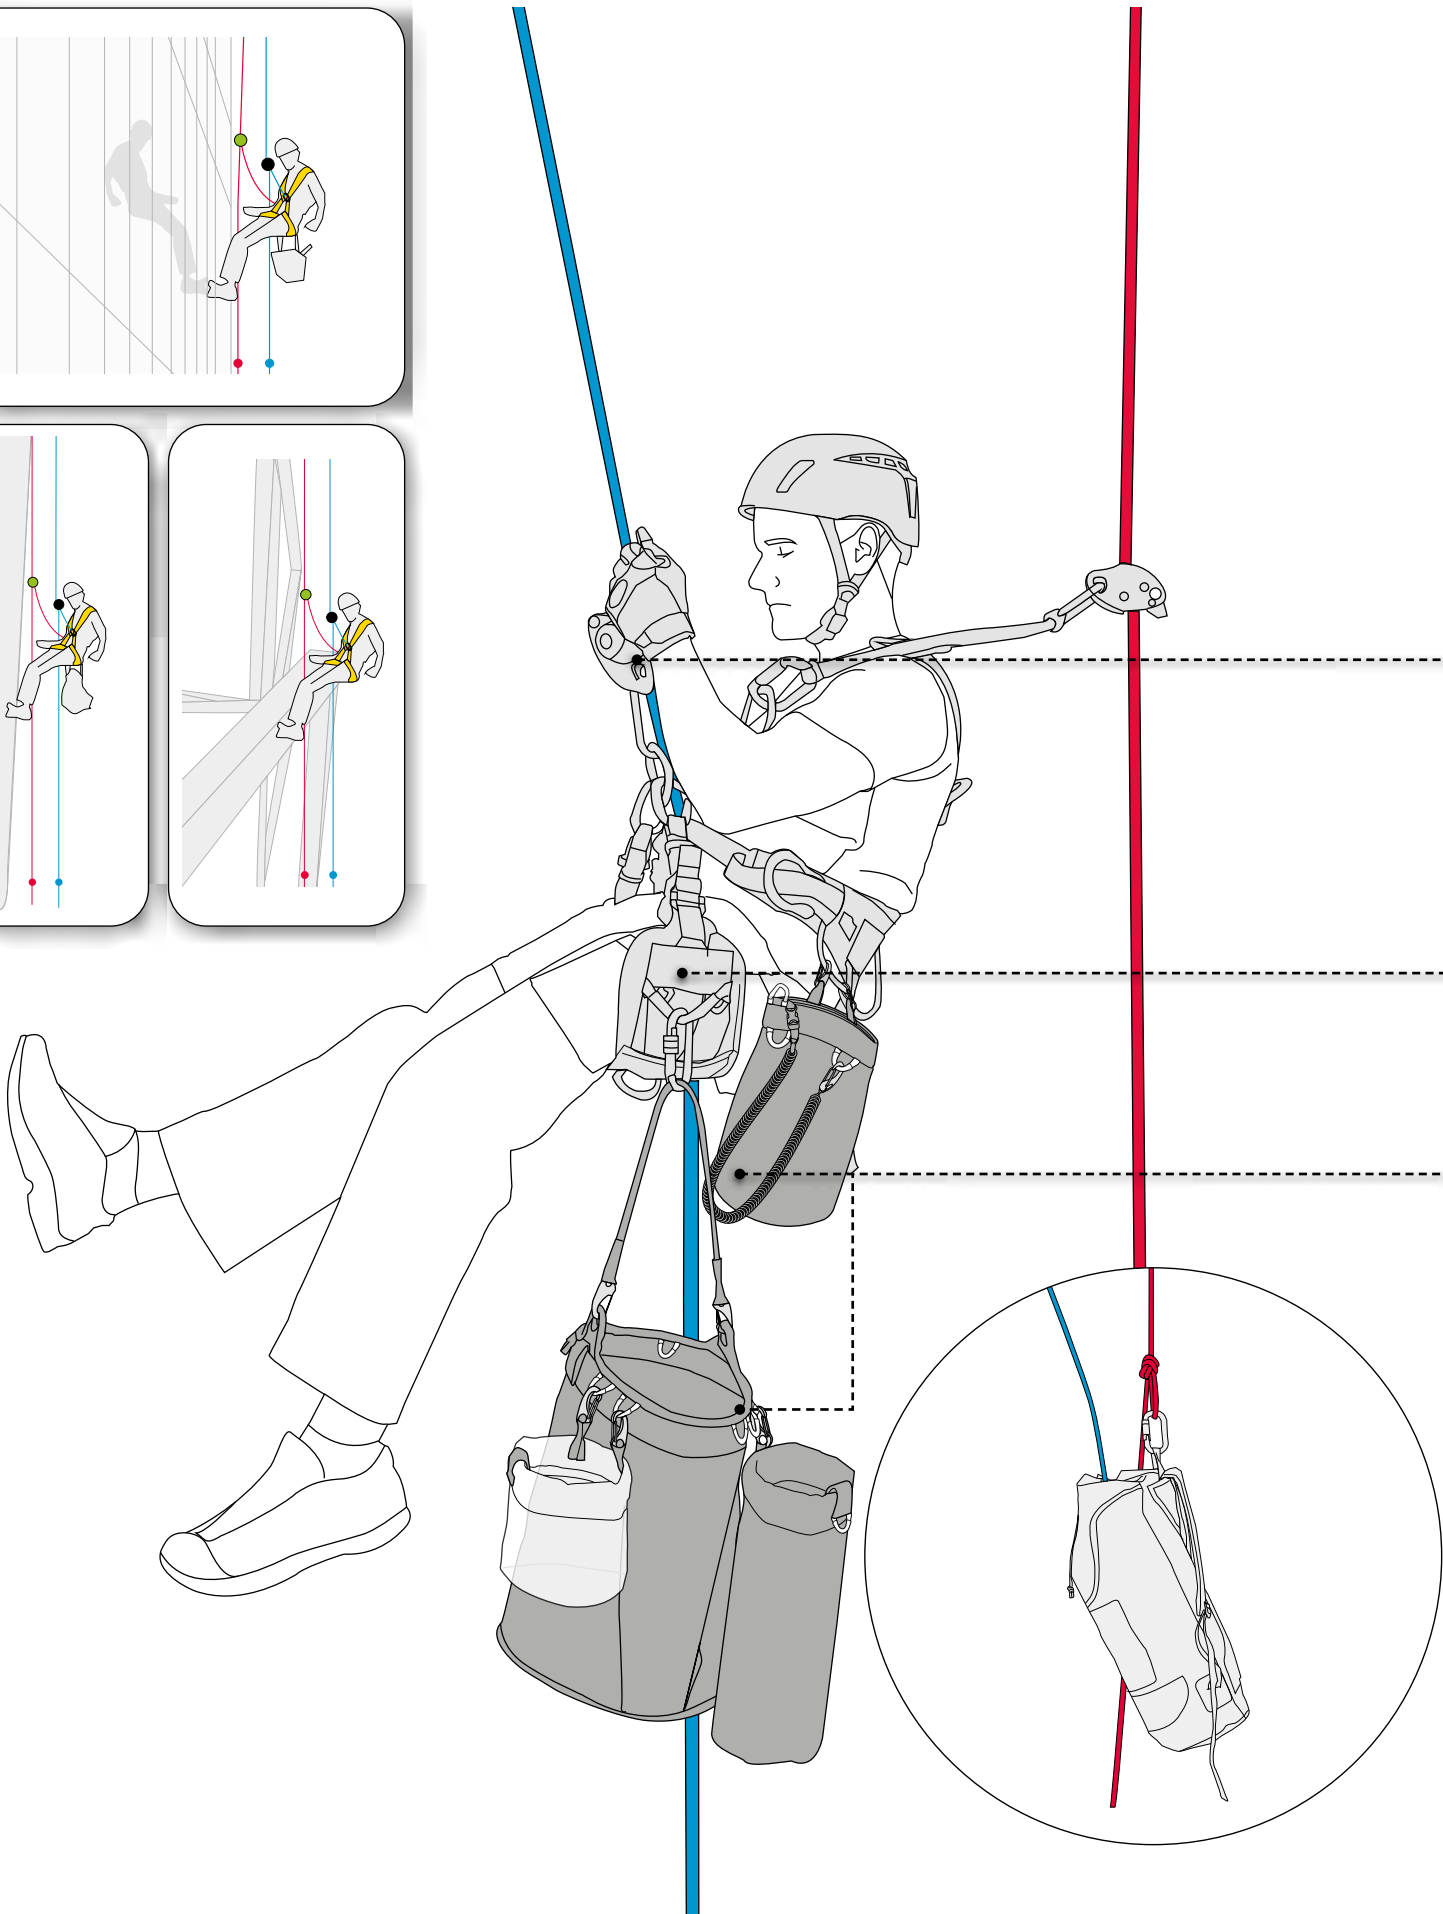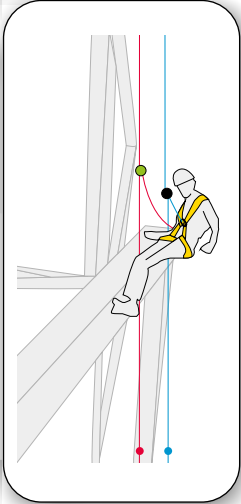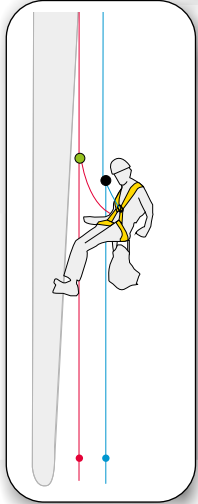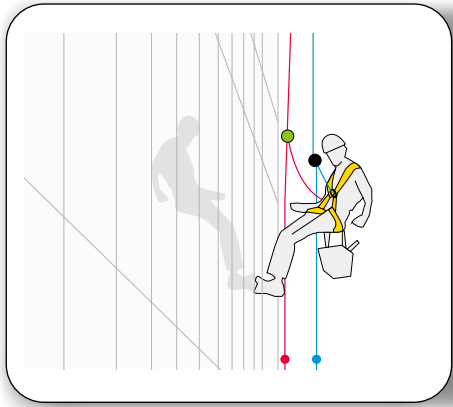


D4 p 64

Self-blocking, anti-panic descender manufactured entirely of metal for greater durability, height work and rescue.

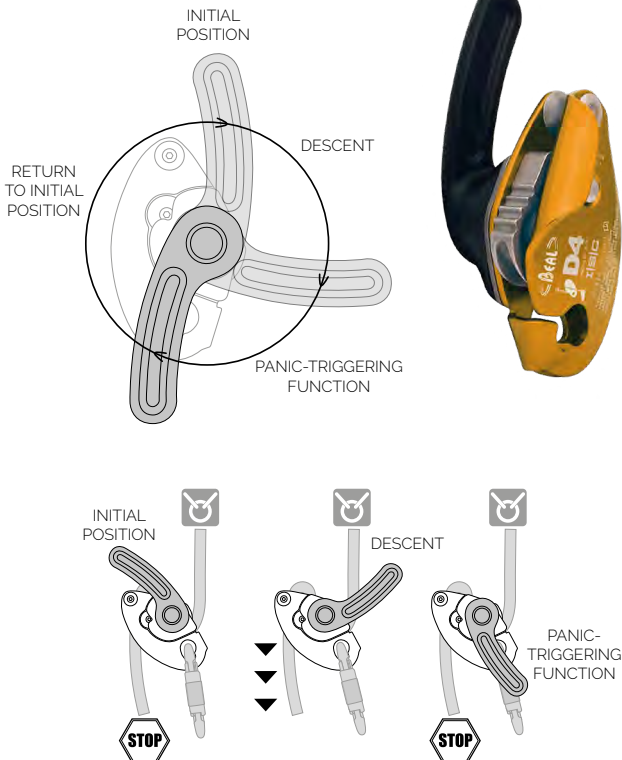

AIR SIT p 56-57

Stable and comfortable suspended work seat for rope access.

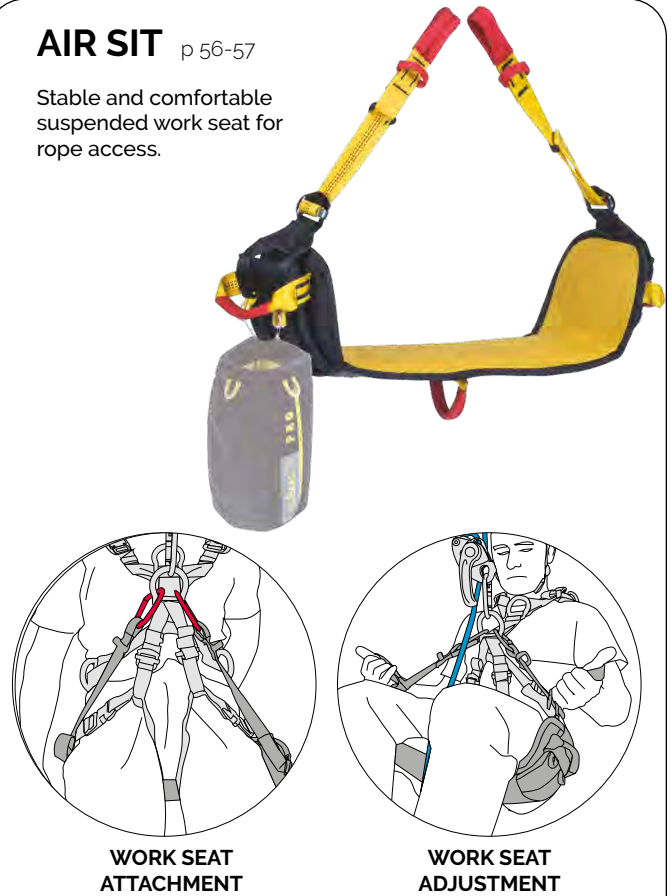

WORK STATION p 68-69

TOOL BUCKET TOOL BUCKET L



GLASS BUCKET




GENIUS BUCKET



GENIUS TOOL BUCKET



AIR LEASH

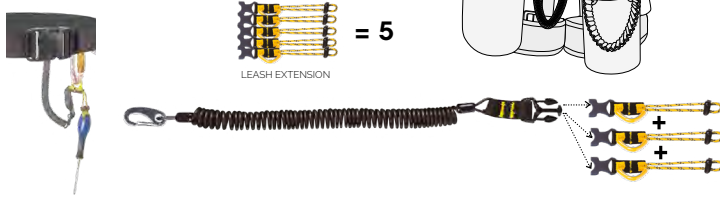


SUPER LEASH



ATTRAC'TOOL




SKI LIFT EVACUATION

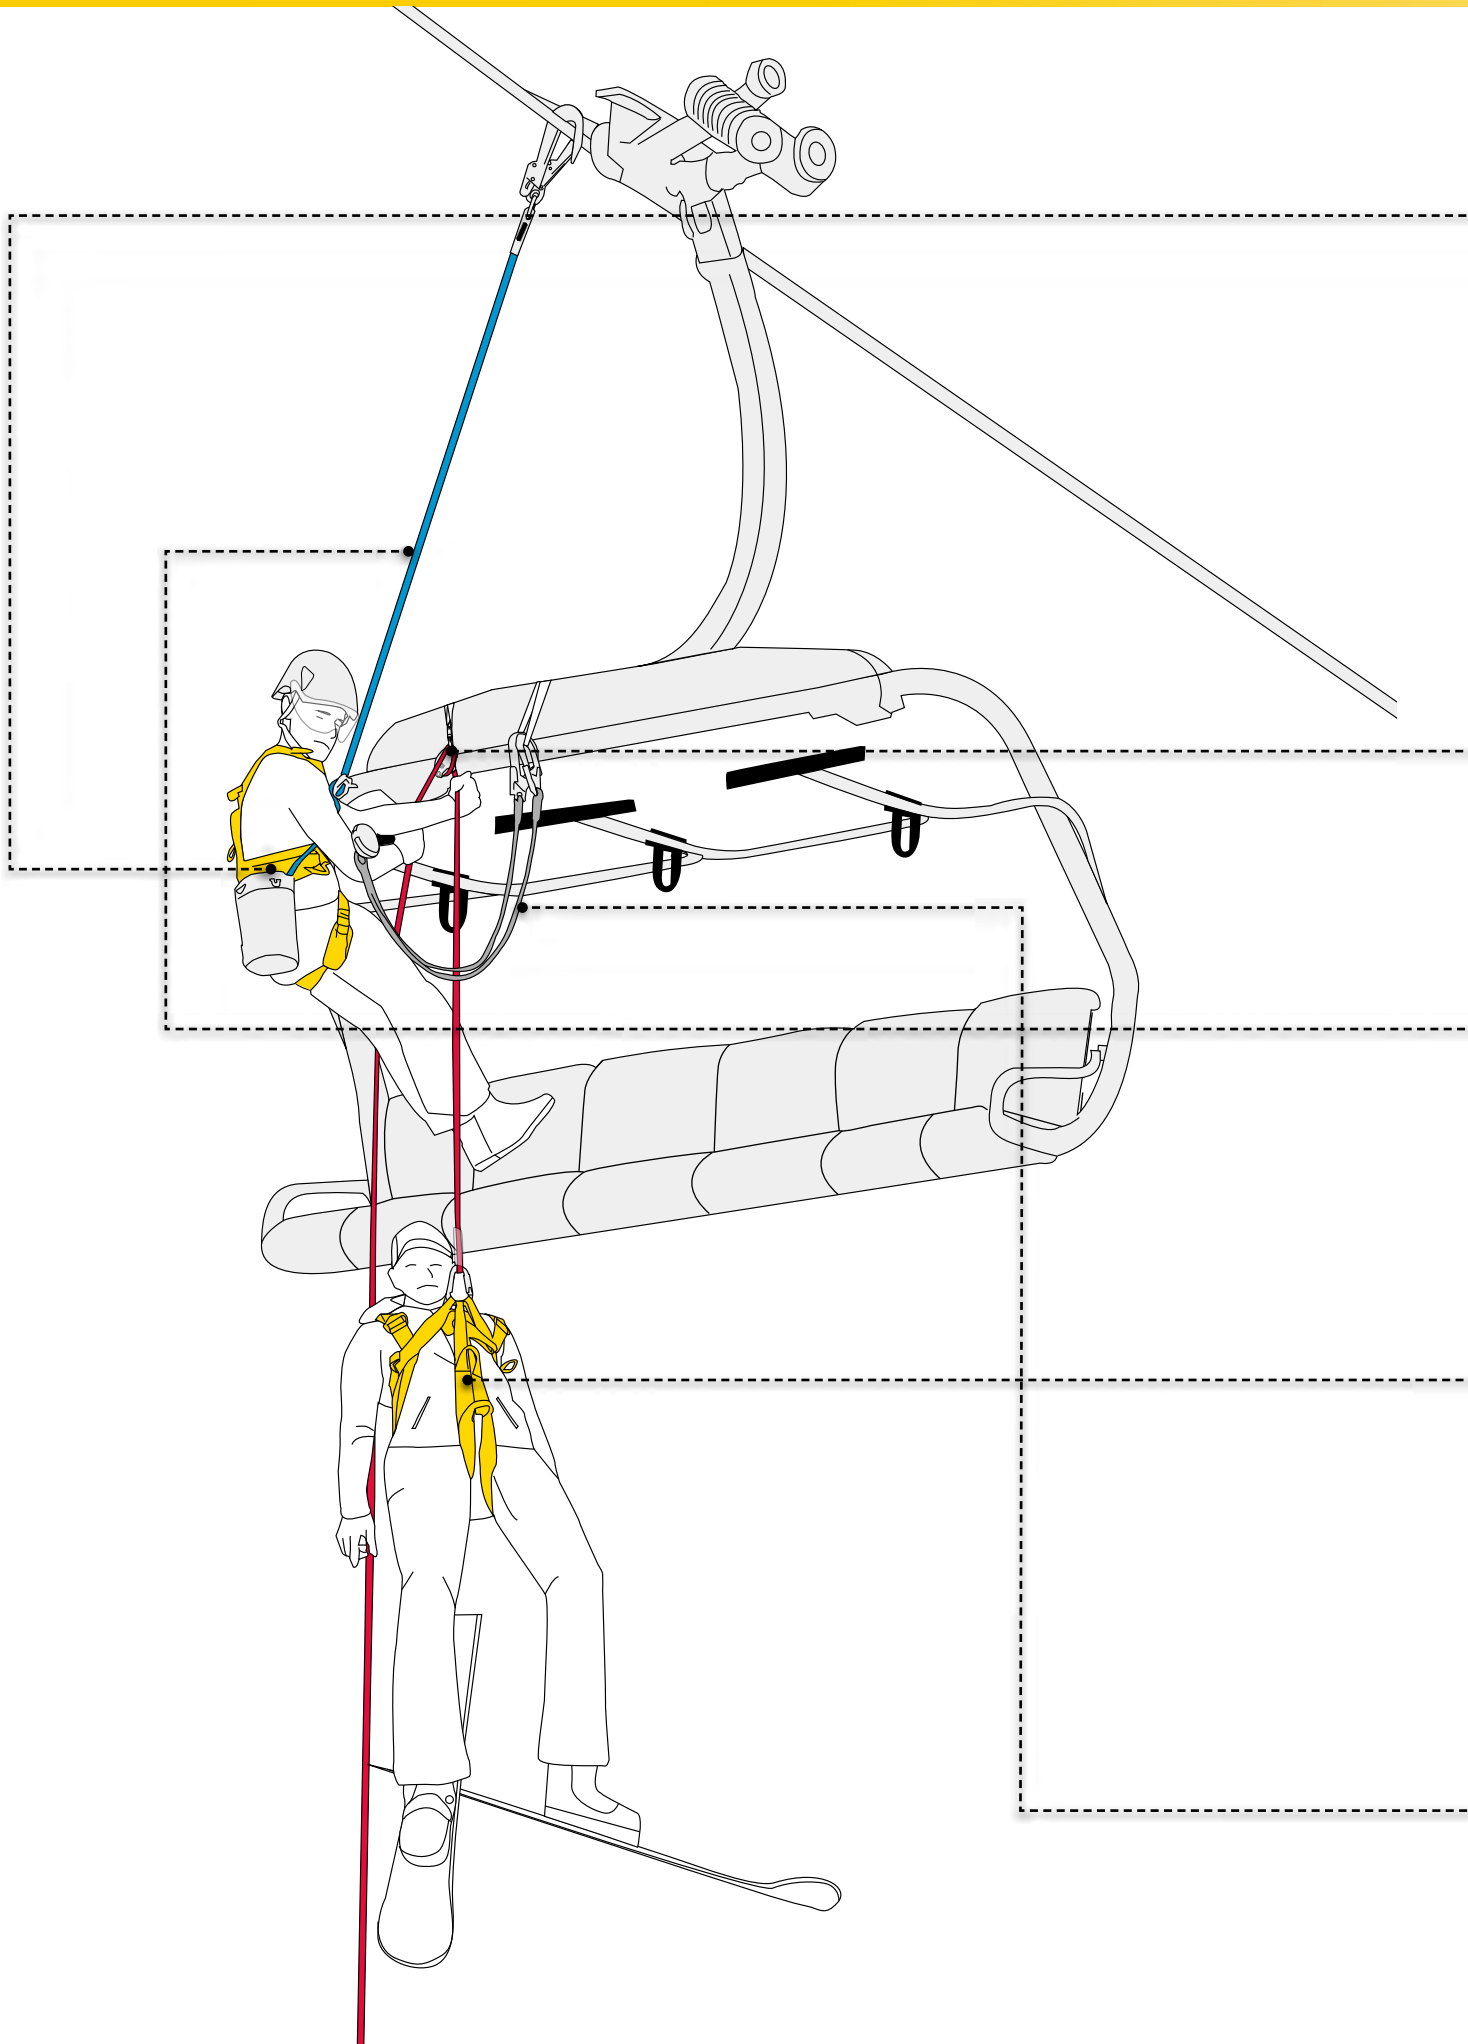


D4 p 64

Self-blocking, anti-panic descender manufactured entirely of metal for greater durability, height work and rescue.

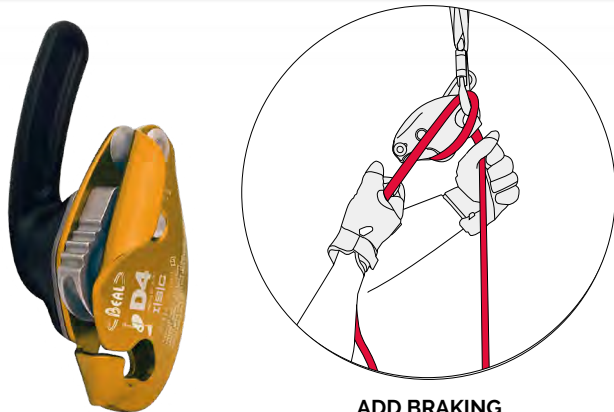

ADD BRAKING

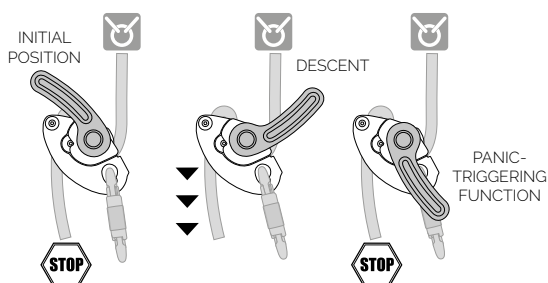

TOP DRAGON p 59

Lightweight, adjustable Y-shaped torso compatible with DRAGON harnesses for a complete harness. Easy to put on and comfortable, it keeps the operator in an upright position in case of a fall. Two fall arrest attachment points: sternal and dorsal.



DRAGON p 59

A lightweight rescue harness. When combined with the DRAGON TOP it can be used for fall arrest and work positioning.

SWANIE LINE p 50

Adjustable anchor allowing a versatile solution on 11mm rope :
- Adjustable lanyard to maintain comfortable and accurate position at the workstation.
- Temporary anchor.

NEW 2021

Recommended karabiner on SWANIE LINE :
BE LINK BI MATIC.



TRI-ANGEL p 59

Evacuation triangle for vertical rescues.




LARGE SIZE

MEDIUM SIZE

SMALL SIZE

INDUSTRIE 11 mm p 41

An ideal rope with no diameter restrictions for security in work at height.




DYNAPRO-AIR V HOOK p 53

V-shaped fall arrest lanyard with integrated energy absorber (EN355 + EN362). Designed as a progression lanyard for work environments with a fall risk, it is well adapted to structures where anchor points are cables, bars or beams.

Stitching protected by a moulded cover

DYNAPRO-AIR V HOOK XL

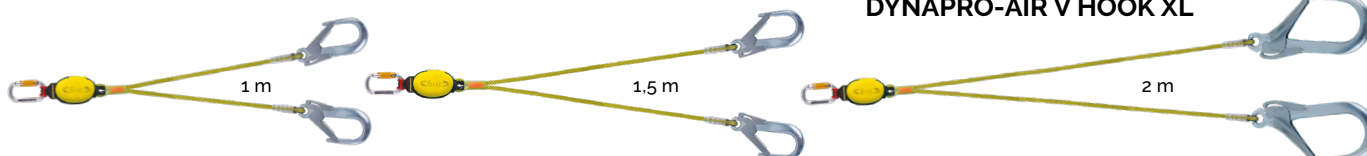


OFF SHORE WORK



WORK IN CHEMICAL ENVIRONMENT



HOTLINE
11 mm



RAIDER
11 mm



CHEMICAL RESISTANCE OF ARAMID YARN (exposure for 100 hours)

ACIDS	Residual Tenacity in %age
Hydrochloric 20 % at 20° C	98 %
Nitric 10 % at 20° C	99 %
Sulphuric 20 % at 95° C	93 %
Sulphuric 40 % at 95° C	89 %
Acetic 40 % at 95° C	97 %
Formic 90 % at 95° C	82 %

BASES	Residual Tenacity in %age
Soda 10 % at 95° C	75 %
Wet cement at 95° C	93 %
Ammonia at 20° C	100 %

Other Chemical Products	Residual Tenacity in %age
Petrol / Gas	98 %
Benzene	98 %
Methyl Ethyl Cetone	97 %
Ethylene Glycol	94 %
Phenol	95 %
Sea water	100 %

RESCUE



TOP DRAGON



RESCUE
10,5 mm



RESCUE VLS
11,3 mm



DRAGON



REACTIVE
10,5 mm



RESCUE
HALF INCH
13 mm


WORK UNDER HIGH TEMPERATURE

RAIDER 10,5 mm

RAIDER 11 mm

RAIDER TACTIC 11 mm

HOT PROTECTOR

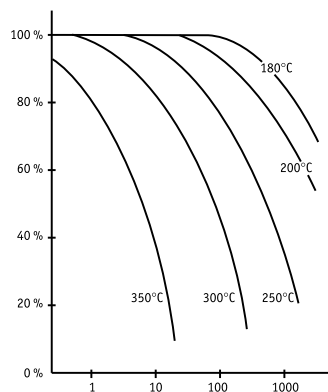

Relationship between time of exposure at high temperature and residual strength of Aramid.

EFFECT OF HIGH TEMPERATURES ON ARAMID

The resistance of Aramid to high temperatures is best illustrated by the graph illustrating the residual strength after exposure to raised temperatures. Thus we may for

example see that after 10 hours of exposure at 200° C it retains 100 % of its strength, or that after 1 hour at 350° C it retains 90 % of its strength.

TEST WITH BLOWTORCH

Semi-static rope holding a mass of 100 kg exposed to a temperature of 400° C (+ or- 50° C) for 15 minutes :

Results:

- Classic 11 mm rope: Break after around 40 seconds.
- RAIDER 11 mm rope: Residual strength around 1500 daN after 15 minutes.
- RAIDER TACTIC 11 mm rope: residual strength around 1000 daN after 15 minutes.

TEST AGAINST A RED HOT BAR














The rope supports a 100 kg mass. It is held clear of a 25 mm bar heated red-hot. It is released against the bar and the time to rupture measured.

Results:








- Classic 11 mm rope: 3 seconds
- HOTLINE 11 mm: 5 seconds
- RAIDER TACTIC 11 mm: 8 seconds
- RAIDER 11 mm: 18 seconds

Model		Standard	Certification	Type	Breaking load	Strength with Figure-of-8 knot	Strength with sewn terminations	Number of fall factor 1	Impact force factor 0.3	Extension 50/450 kg	Sheath slippage	Weight per metre	% of the sheath	Mass of the core	Shrinkage in water	Material
ROPES FOR DIFFICULT AREA ACCESS																
ACCESS 10,5 mm		EN 18g1	CE	A	3000 daN(kg)	1800 daN(kg)	1900 daN(kg)	12	5,3 kN	3%	0%	66 g	38%	62%	2,5%	Polyamide
ACCESS 11 mm		EN 18g1	CE	A	3400 daN(kg)	1950 daN(kg)	1900 daN(kg)	20	5,6 kN	2,1%	0%	74 g	36%	64%	1,1%	Polyamide
ANTIPODES 10,5 mm		EN 18g1	CE	A	3000 daN(kg)	1800 daN(kg)	1900 daN(kg)	12	5,3 kN	2,7%	0,8%	66 g	37%	63%	1,4%	Polyamide
ANTIPODES 11,5 mm		EN 18g1	CE	A	3500 daN(kg)	2200 daN(kg)	1900 daN(kg)	>20	5,6 kN	2,5%	0,3%	77 g	38%	62%	1,5%	Polyamide
INDUSTRIE 10,5 mm		EN 18g1	CE	A	3000 daN(kg)	1800 daN(kg)	1900 daN(kg)	12	5,3 kN	3%	0,8%	66 g	38%	62%	5%	Polyamide
INDUSTRIE 11 mm		EN 18g1	CE	A	3400 daN(kg)	1950 daN(kg)	1900 daN(kg)	16	5,6 kN	2,1%	0%	74 g	36%	64%	1,1%	Polyamide
INDUSTRIE 12 mm		EN 18g1	CE	A	4200 daN(kg)	2200 daN(kg)	1900 daN(kg)	>20	5,6 kN	2,5%	0,3%	94 g	34%	66%	2,4%	Polyamide
CONTRACT 10,5 mm		EN 18g1	CE	A	2700 daN(kg)	1600 daN(kg)	-	>5	5,5 kN	2,9%	0%	66 g	39%	61%	3,3%	Polyamide
SEGMENT 11 mm		EN 18g1	CE	A	3200 daN(kg)	1900 daN(kg)	1900 daN(kg)	12	5,6 kN	4,2%	0%	71 g	35%	65%	4%	Polyamide
TOP WORK 10,5 mm		EN 18g1	CE	A	2600 daN(kg)	1700 daN(kg)	1900 daN(kg)	10	5,3 kN	4,8%	0,3%	64 g	44%	56%	3,5%	Polyamide
NORTH SEA 11 mm		EN 18g1	CE	A	3000 daN(kg)	1800 daN(kg)	1900 daN(kg)	16	5,6 kN	4%	0,9%	75 g	44%	56%	3%	Polyamide
UNIVERSAL ROPE TO BOTH STANDARDS EN 892 & EN 18g1																
DYNASTAT 10,5 mm		EN 18g1 EN 892	CE	A ①	2500 daN(kg)	1600 daN(kg)	1900 daN(kg)	24 Factor 2 10	4,3 kN	2%	0,8%	75 g	44%	56%	0%	Sheath: Polyamide Core: Polyamide/ vectran
FLOATING ROPE & ROPE FOR DIFFICULT AREA ACCESS																
PRO WATER 11 mm		EN 18g1	CE	A	2500 daN(kg)	1600 daN(kg)	-	5	5,3 kN	3,6%	0%	80 g	33%	67%	0%	Polyamide/ Neopren

ROPES







Model		Standard	Certification	Type	Breaking load	Strength with Figure-of-8 knot	Strength with sewn terminations	Number of fall factor 1	Impact force factor 0.3	Extension 50/150 kg	Sheath slippage	Weight per metre	% of the sheath	Mass of the core	Shrinkage in water	Material
SPECIAL ROPES																
ERGO 11.5 mm		EN 1891	CE	A	3800 daN(kg)	2300 daN(kg)	1900 daN(kg)	> 20	5,6 kN	2,9%	0%	101g	43%	57%	3,7%	Polyamide
AUSTRALIS 11.5 mm		AS4143-3	-	-	3300 daN(kg)	-	-	-	-	9,5%	0%	93,7g	42%	58%	-	Sheath: Polyester Core: Polyamide
ROPES FOR TREE WORK																
BILOBA 11.5 mm		EN 1891	CE	A	3000 daN(kg)	1800 daN(kg)	1800 daN(kg)	15	5 kN	3,8%	0%	89g	44%	56%	2,8%	Sheath: Polyester Core: Polyamide
GINKGO 12 mm		EN 1891	CE	A	2700 daN(kg)	1600 daN(kg)	1900 daN(kg)	8	5,7 kN	4%	0%	92g	69%	31%	2,8%	Sheath: Polyester Core: Polyamide
BAOBAB 13.5 mm	 	EN 1891	CE	A	3000 daN(kg)	1900 daN(kg)	1900 daN(kg)	20	5,1 kN	5%	0%	119g	82%	18%	2%	Sheath: Polyester Core: Polyamide
BONSAI 13 mm		EN 1891	CE	A	3400 daN(kg)	1800 daN(kg)	1900 daN(kg)	20	5,3 kN	3,3%	0%	101g	61%	39%	3,7%	Polyamide
ROPES FOR PRUSIKS																
REGATE 10 mm		-	CE	-	1700 daN(kg)	-	-	-	-	-	-	73g	-	-	-	Polyester
VOLCANO 8 mm		EN 564	CE	-	1600 daN(kg)	-	-	-	-	-	-	48 g	-	-	-	Polyamide/Aramid
RETENTION ROPES																
GOLIATH 12 mm		-	-	-	4200 daN(kg)	-	-	-	-	-	-	128 g	-	-	-	Polyester
GOLIATH 14 mm		-	-	-	5500 daN(kg)	-	-	-	-	-	-	179 g	-	-	-	Polyester
GOLIATH 16 mm		-	-	-	6700 daN(kg)	-	-	-	-	-	-	219 g	-	-	-	Polyester
GOLIATH 18 mm		-	-	-	8000 daN(kg)	-	-	-	-	-	-	260 g	-	-	-	Polyester

ACCESSORY CORDS

	WEIGHT PER METER	BREAKING LOAD		MATERIAL	CERTIFICATION	STANDARD
4 mm	 11 g	400 daN (kg)	530 daN (kg)	Polyamide	CE/UIAA	EN 564
5 mm	 19,5 g	650 daN (kg)	930 daN (kg)	Polyamide	CE/UIAA	EN 564
5.5 mm Dyneema	 20 g	1800 daN (kg)	2000 daN (kg)	Sheath: Polyamide Core: Dyneema	CE/UIAA	-
6 mm	 23 g	810 daN (kg)	1200 daN (kg)	Polyamide	CE/UIAA	EN 564
7 mm	 31 g	1170 daN (kg)	1680 daN (kg)	Polyamide	CE/UIAA	EN 564
8 mm	 40 g	1530 daN (kg)	2200 daN (kg)	Polyamide	CE/UIAA	EN 564



WEBBING

p 48

	WEIGHT PER METER	BREAKING LOAD		MATERIAL	CERTIFICATION	STANDARD	CONDITIONING
Tubular 16 mm 	31 g	1350 daN (kg)	1800 daN (kg)	Polyamide	CE/UIAA	EN565	100 m
Tubular 26 mm 	38 g	1500daN (kg)	2000 daN (kg)	Polyamide	CE/UIAA	EN565	100 m
Tape 18 mm 	39 g	1600 daN (kg)	1800 daN (kg)	Polyamide	CE/UIAA	EN565	100 m
Tape 26 mm 	35 g	1500 daN (kg)	1900 daN (kg)	Polyamide	CE/UIAA	EN565	100 m
Tape 45 mm 	55 g	2200 daN (kg)	2600 daN (kg)	Polyamide	CE/UIAA	EN565	80 m

FLAT SLINGS

p 48

	WEIGHT	BREAKING LOAD	LENGTH	MATERIAL	CERTIFICATION	STANDARD	CONDITIONING
18 mm 	60 cm = 48 g	2200 daN (kg)	30 / 40 / 50 / 60 / 80 / 100 / 120 / 150 / 175 cm	Polyamide	CE/UIAA	EN 566 EN 795B EN 354	5
10 mm 	60 cm = 19,8 g	2200 daN (kg)	60 / 120 / 180 cm	Dyneema	CE/UIAA	EN 566 EN 795B EN 354	4
10 mm 	240 cm = 79 g	2200 daN (kg)	240 cm	Dyneema	CE/UIAA	EN 566 EN 795B	4


DYNALOOP / EYE LOOP

p 49

	LENGTH	WEIGHT	BREAKING LOAD	MATERIAL	STANDARD
DYNALOOP 	60 cm	55 g	2200 daN (kg)	Polyamide	CE EN 566 / CE EN 354
DYNALOOP 	120 cm	105 g	2200 daN (kg)	Polyamide	CE EN 566 / CE EN 354
DYNALOOP 	150 cm	135 g	2200 daN (kg)	Polyamide	CE EN 566 / CE EN 354
EYE LOOP 	60 cm	100 g	3000 daN (kg) 2200 daN (kg) girth hitch	Polyamide	CE EN 566 / CE EN 354
EYE LOOP 	80 cm	125 g	3000 daN (kg) 2200 daN (kg) girth hitch	Polyamide	CE EN 566 / CE EN 354
EYE LOOP 	120 cm	170 g	3000 daN (kg) 2200 daN (kg) girth hitch	Polyamide	CE EN 566 / CE EN 354
EYE LOOP 	150 cm	200 g	3000 daN (kg) 2200 daN (kg) girth hitch	Polyamide	CE EN 566 / CE EN 354



ESCAPER

p 49

	WEIGHT	STRENGTH	STANDARD
ESCAPER 	100 g	18 kN	CE EN 795B

ANCHOR

p 49





	CABLE LENGTH	STRENGTH	MATERIAL	WEIGHT	STANDARD
ANCHOR STROP 	50 cm 1 m	25 kN	Cable : galvanised steel	260 g 434 g	CE EN795B
ROOF ANCHOR 	45,6 cm	12 kN	Cable : stainless steel Plate : aluminium	170 g	CE EN795A

	WEIGHT	MATERIAL	STANDARD
MOOR STEEL 10 MM (X20) 	70 g	STEEL	CE EN795A / CE EN959
MOOR STAINLESS STEEL 10 MM (X20) 	69 g	STAINLESS STEEL 316 L	CE EN795A / CE EN959
MOOR STEEL 12 MM (X20) 	70 g	STEEL	CE EN795A / CE EN959
MOOR STAINLESS STEEL 12 mm (x20) 	71 g	STAINLESS STEEL 316 L	CE EN795A / CE EN959
MOOR BOLT STEEL 10 mm (x20) 	130 g	STEEL	CE EN795A
MOOR BOLT STAINLESS STEEL 10 mm (x20) 	131 g	STAINLESS STEEL 316 L	CE EN795A / CE EN959
MOOR BOLT STAINLESS STEEL 12 mm (x20) 	141 g	STAINLESS STEEL 316 L	CE EN795A / CE EN959




DATA





ADJUSTABLE LANYARDS

		LENGTH	WEIGHT	STANDARD
SWANIE LINE		2 m 3 m 5 m 10 m 15 m 20 m	420 g 494 g 642 g 1015 g 1390 g 1770 g	CE EN 358 CE EN 12841 CE EN 795 B/C TS16415 (multi user : 2)
SWANIE LINE ROPE		2 m 3 m 5 m 10 m 15 m 20 m	180 g 254 g 402 g 775 g 1150 g 1530 g	CE EN 358 CE EN 12841 CE EN 795 B/C TS16415 (multi user : 2)
DYNAPRO FIT I		1 m	150 g	CE EN 358
DYNAPRO FIT V		65 cm + 1 m	205 g	CE EN 358
ADJUST'AIR		2 m 3 m 5 m	710 g 820 g 1020 g	CE EN 358




NOT ADJUSTABLE DYNAMIC LANYARDS

		LENGTH	WEIGHT	STANDARD
Dynapro		0,60 m 1,00 m 1,50 m	140 g 170 g 200 g	CE EN 354 / EN 795B CE EN 354 / EN 795B CE EN 354 / EN 795B
Dynapro 8		1,60 m	250 g	CE EN 354
Dynapro V		0,30 m / 0,60 m 1,00 m 1,50 m		CE EN 354 / EN 795B CE EN 354 / EN 795B CE EN 354 / EN 795B

NOT ADJUSTABLE STATIC LANYARDS

		LENGTH	WEIGHT	STANDARD
Nexus I		0,60 m 0,80 m	50 g 65 g	CE EN 354 / EN 795B CE EN 354 / EN 795B
Nexus V		0,80 m	100 g	CE EN 354 / EN 795B












FALL ARREST LANYARDS

		CONNECTORS	LENGTH	WEIGHT	STANDARD
Dynapro-Air Hook		1x O'light 3-matic + 2x Air Hook L	1,00 m	880 g	CE EN 355 / EN 362
		1x O'light 3-matic + 2x Air Hook L	1,50 m	920 g	CE EN 355 / EN 362
		1x O'light 3-matic + 2x Air Hook L	2,00 m	970 g	CE EN 355 / EN 362
Dynapro-Air V Hook		1x O'light 3-matic + 2x Air Hook L	1,00 m	1450 g	CE EN 355 / EN 362
		1x O'light 3-matic + 2x Air Hook L	1,50 m	1530 g	CE EN 355 / EN 362
Dynapro-Air V Hook XL		1x O'light 3-matic + 2x Air Hook XL	2,00 m	2530 g	CE EN 355 / EN 362 CE EN 355 / EN 362

HARNESSES







p 54-59

DATA













Model	Size	Waist	Leg loop	Chest loop	Height	Chest height	Certification	Weight	Sternal attachment points	Dorsal attachment points	Ventral attachment points	Lateral attachment points	
FALL ARREST HARNESS													
STYX RESCUE		Universel	40-80 cm	55-80 cm	80-140 cm	160-195 cm	-	CE EN 361	1062 g	✓	✓	-	-
STYX RESCUE JACKET		Universel	40-80 cm	55-80 cm	80-140 cm	160-195 cm	-	CE EN 361	1062 g	✓	✓	-	-
STYX FAST		1 (S-M-L) 2 (L-XL)	65-105 cm 100-130 cm	45-65 cm 60-75 cm	80-120 cm 90-140 cm	160-180 cm 175-210 cm	55-75 cm 65-85 cm	CE EN 361	1700 g 1750 g	✓ ✓	✓ ✓	- -	- -
WORKSTATION BELT													
STYX BELT		Universel	70-140 cm	-	-	-	-	CE EN 358	780 g	+	+	+	✓
FALL ARREST, ROPE ACCESS AND WORK POSITIONING HARNESS													
OFF SHORE		1 (S-M-L) 2 (L-XL)	70-105 cm 85-130 cm	50-65 cm 60-75 cm	- -	160-180 cm 175-210 cm	- -	CE EN 361 CE EN 358 CE EN 813	1920 g 2080 g	✓ ✓	- -	✓ ✓	✓ ✓
SOLACE		S M-L XL	65-85 cm 78-100 cm 85-100 cm	40-60 cm 50-65 cm 55-70 cm	- -	155-175 cm 165-185 cm 175-210 cm	- -	CE EN 361 (140 kg) CE EN 358 (140 kg) CE EN 813 (140 kg)	2180 g 2270 g 2350 g	✓ ✓ ✓	✓ ✓ ✓	✓ ✓ ✓	✓ ✓ ✓
SOLACE HOLD UP		S M-L XL	65-85 cm 78-100 cm 85-100 cm	40-60 cm 50-65 cm 55-70 cm	- -	155-175 cm 165-185 cm 175-210 cm	- -	CE EN 361 (140 kg) EN 358 (140 kg) EN 813 (140 kg) CE EN 567 : Ø 8-13 mm CE EN 12841 : 2006-B : Ø 10-13 mm 100 kg	2340 g 2430 g 2510 g	✓ ✓ ✓	✓ ✓ ✓	✓ ✓ ✓	✓ ✓ ✓
HERO PRO		S M-L XL	70-90 cm 80-105 cm 90-130 cm	50-65 cm 55-65 cm 60-70 cm	70-100 cm 80-120 cm 100-140 cm	155-175 cm 170-185 cm 180-210 cm	55-70 cm 65-80 cm 75-85 cm	CE EN 361 CE EN 358 CE EN 813	2065 kg 2125 kg 2230 kg	✓ ✓ ✓	✓ ✓ ✓	✓ ✓ ✓	✓ ✓ ✓
HERO PRO HOLD UP		S M-L XL	70-90 cm 80-105 cm 90-130 cm	50-65 cm 55-65 cm 60-70 cm	70-100 cm 80-120 cm 100-140 cm	155-175 cm 170-185 cm 180-210 cm	55-70 cm 65-80 cm 75-85 cm	CE EN 361 EN 358 EN 813 CE EN 567 : Ø 8-13 mm CE EN 12841 : 2006-B : Ø 10-13 mm 100 kg	2065 kg 2125 kg 2230 kg	✓ ✓ ✓	✓ ✓ ✓	✓ ✓ ✓	✓ ✓ ✓
ROPE ACCESS AND WORK POSITIONING HARNESS													
HERO SIT		S M-L XL	70-90 cm 80-105 cm 90-130 cm	50-65 cm 55-65 cm 60-70 cm	- -	- -	- -	CE EN 358 CE EN 813	1437 g 1478 g 1568 g	- -	- -	✓ ✓ ✓	✓ ✓ ✓
SHAOLIN		S M-L XL	60-100 cm 72-120 cm 85-140 cm	42-60 cm 52-70 cm 57-75 cm	- -	- -	- -	CE EN 358 CE EN 813	700 g 760 g 810 g	- -	- -	✓ ✓ ✓	✓ ✓ ✓



HARNESSES

Model		Size	Waist	Leg loop	Chest loop	Height	Chest height	Certification	Weight	Sternal attachment points	Dorsal attachment points	Ventral attachment points	Hip attachment points	
RESCUE HARNESS														
DRAGON		1 (S-M-L)	68-100 cm	42-62 cm	-	-	-	CE EN 358 CE EN 813	900 g	✓ with chest TOP DRAGON	✓	✓	✓	
		2 (L-XL)	72-125 cm	50-70 cm	-	-	-		960 g	✓ with chest TOP DRAGON	✓	✓	✓	
TRI-ANGEL			60-100 cm	42-60 cm	-	-	-	CE EN 1497 : 2007 CE EN 1498 : 2006	747 g	-	-	-	-	
			72-120 cm	52-70 cm	-	-	-			-	-	-	-	-
			85-140 cm	57-75 cm	-	-	-			-	-	-	-	-
HARNESSES ACCESSORIES														
DRAGON TOP		Universel	-	-	-	60-140 cm	-	CE EN 361	470 g	✓	✓	✓	-	
AIR TOP		Universel	-	-	-	60-140 cm	-	CE EN 361 CE EN 12277 type D	345 g	✓	-	✓	-	
YPSILON		Universel	-	-	-	60-140 cm	-	CE EN 361	370 g	✓	-	✓	-	
AIR SIT		Universel	50x28x12 cm	-	-	-	-	CE EN 361	-	-	-	-	-	

HELMETS

	SIZE	CIRCUMFERENCE	CHINSTRAP	ADJUSTMENT	COLORS	WEIGHT	STANDARD
QUANTUM		Universel	53 < 63 cm	15-25 daN		400 g	CE EN 397
QUANTUM ELEC		Universel	53 < 63 cm	15-25 daN		400 g	CE EN 397 / EN 50365
QUANTUM VISOR		230x110x100 mm	-	-	-	50 g	CE EN 166
QUANTUM V PROTECT		230x110x100 mm	-	-	-	63 g	-
MERCURY		Universel	50 < 62 cm	>50 daN		432 g	CE EN 12492
SKYFALL		Universel	54 < 62 cm	15-25 daN		390 g	CE EN 397
SKYFALL ELEC		Universel	54 < 62 cm	15-25 daN		390 g	CE EN 397 / EN 50365

CONNECTOR

p 62









		DIMENSIONS	OPENING				WEIGHT	STANDARD
O'Light		111 x 61 cm	17 mm	22 kN	8 kN	6 kN	74 g	CE EN 362:2004/B CE EN 12275:2013⊗
O'Light 3-matic		111 x 61 cm	17 mm	22 kN	8 kN	6 kN	82 g	CE EN 362:2004/B CE EN 12275:2013⊗
Be Quick		105 x 60 mm	19 mm	23 kN	9 kN	8 kN	44 g	CE EN 362:2004/B CE EN 12275:2013Ⓢ
Be Link		108 x 66 cm	20 mm	26 kN	8 kN	7 kN	65 g	CE EN 362:2004/B CE EN 12275:2013Ⓢ
Be Link Bi-matic		108 x 66 cm	20 mm	26 kN	8 kN	7 kN	65 g	CE EN 362:2004/B CE EN 12275:2013Ⓢ
Be Link 3-matic		108 x 66 cm	20 mm	26 kN	8 kN	7 kN	65 g	CE EN 362:2004/B CE EN 12275:2013Ⓢ
Be Lock		121 x 76 cm	22 mm	26 kN	8 kN	8 kN	86 g	CE EN 362:2004/B CE EN 12275:2013Ⓢ
Be Lock 3-matic		121 x 76 cm	22 mm	26 kN	8 kN	8 kN	100 g	CE EN 362:2004/B CE EN 12275:2013Ⓢ
Flat link Bi-matic		85 x 71 cm	16 mm	20 kN	10 kN	5 kN	81 g	CE EN 362:2004/B
O'Smith		109 x 56 cm	17 mm	30 kN	16 kN	8 kN	179 g	CE EN 362:2004/B.A.T CE EN 12275:2013Ⓢ
O'Smith 3-matic		109 x 56 cm	17 mm	30 kN	16 kN	8 kN	198 g	CE EN 362:2004/B.A.T CE EN 12275:2013Ⓢ
Air-Smith		114 x 73 cm	25 mm	52 kN	16 kN	18 kN	251 g	CE EN 362:2004/B.A.T CE EN 12275:2013Ⓢ
Air-Smith 3-matic		114 x 73 cm	25 mm	52 kN	16 kN	18 kN	251 g	CE EN 362:2004/B.A.T CE EN 12275:2013Ⓢ
Twin O		110 x 58 cm	24 mm	24 kN	9 kN	8 kN	86 g	CE EN 362:2004/B CE EN 12275:2013⊗
Twin smith captive		116 x 73 cm	29 mm	45 kN	18 kN	17 kN	228 g	CE EN 362:2004/B CE EN 12275:2013Ⓢ
Air-Hook Large		240 x 120 cm	60 mm	22 kN	-	-	475 g	CE EN 362:2004/A
Air -Hook XL		360 x 165 cm	110 mm	25 kN	-	-	920 g	CE EN 362:2004/A-T

DATA






QUICK LINKS

p 63

		WORKING LOAD LIMIT	BREAKING LOAD (KG)	WEIGHT	LENGHT	WIDTH	OPENING
STANDARD GALVA 8 mm		700	3500	77 g	73 mm	34 mm	11.4 mm
STANDARD GALVA 10 mm		1100	5500	137 g	88 mm	41.5 mm	12 mm
LONG OPENING GALVA 7 mm		500	2500	60 g	78,5 mm	31 mm	16 mm
PEAR GALVA 10 mm		720	3600	185 g	118 mm	65 mm	20 mm
DELTA GALVA 8 mm		550	2750	88 g	73 mm	56 mm	11 mm
DELTA GALVA 10 mm		990	4500	153 g	87 mm	66 mm	12 mm
SEMI CIRCULAR 10 mm		990	4500	153 g	86 mm	65 mm	10 mm
DELTA TWIST		600	3000	135 g	93 mm	62 mm	12 mm









RIGGING PLATES AND SWIVEL

p 63

		DIMENSIONS	COMPATIBLE DIAMETER	MAXIMUM LOAD	WEIGHT	STANDARD
AIR-PORT 4		85,4 x 82,5 mm	MBS 45 kN WLL 9 kN	23,5 mm	92 g	CE
AIR-PORT 6		84,5 x 173,6 cm	MBS 45 kN WLL 9 kN	20 mm	188 g	CE
TWIST'AIR B		150 x 83 cm	MBS 22 kN WLL 4 kN	23,5 mm	88 g	CE EN 354




PULLEYS

p 63

		DIMENSIONS	SHEAVE DIAMETER	ROPE DIAMETER COMPATIBILITY	MAXIMUM LOAD	BALL BEARINGS	WEIGHT	STANDARD
Transf'Air 1		118 x 83 cm	Ø 48,7 mm	16 mm	MBS 30 kN	-	270 g	CE EN 12278 : 2007
Transf'Air 1 B		118 x 83 cm	Ø 48,7 mm	16 mm	MBS 30 kN	✓	280 g	CE EN 12278 : 2007
Transf'Air 2		150 x 83 cm	Ø 48,7 mm	16 mm	MBS 30 kN	-	476 g	CE EN 12278 : 2007
Transf'Air 2 B		150 x 83 cm	Ø 48,7 mm	16 mm	MBS 30 kN	✓	500 g	CE EN 12278 : 2007
Transf'Air Fixe		82 x 45 cm	Ø 22,4 mm	12 mm	MBS 20 kN	-	90 g	CE EN 12278 : 2007
Transf'Air Fixe B		82 x 45 cm	Ø 26,2 mm	13 mm	MBS 22 kN	✓	120 g	CE EN 12278 : 2007
Transf'Air Twin B		76 x 108 cm	Ø 26,2 mm	13 mm cable or rope	MBS 30 kN	✓	282 g	CE EN 12278 : 2007
Transf'Air Mini		80 x 68 cm	Ø 27 mm	11 mm	MBS 20 kN	-	120 g	CE EN 12278 : 2007





DESCENDERS

p 64

		COMPATIBLE DIAMETER	WEIGHT	STANDARD
D4		Ø 10,5 < 11,5 mm	655 g	CE EN 12841 C ANSI Z359 NFPA 1983
Air Stop		Ø 9 < 12 mm	429 g	CE EN 341 / EN 12841
Air Force 8		-	120 g	-




FALL ARREST

p 65

		COMPATIBLE DIAMETER	WEIGHT	STANDARD
MONITOR		Ø 11 < 13 mm	170 g	CE EN 353-2 / EN 12841-A 100 kg
SOFT AIR KIT		10 m	1210 g	CE EN 353-2 (140 kg)
AIR KIT 11 MM		10 m & 30 m : Orange 15 m & 50 m : Blue 20 m & 60 m : Red	1430 g & 2600 g 1800 g & 4430 g 2080 g & 5200 g	CE EN 353-2 / EN 12841-A 100 kg CE EN 353-2 / EN 12841-A 100 kg CE EN 353-2 / EN 12841-A 100 kg
MOBILE LANYARD		20 cm / 40 cm	64 g	CE EN 354

ROPE CLAMPS

p 66

		COMPATIBLE DIAMETER	WEIGHT	STANDARD
Hands up		8 < 13 mm	265 g	CE EN 567 : 2013 Ø8-13 mm CE EN 12841 : 2006-B Ø10-13 mm 100 kg
Hold up		8 < 13 mm	90 g	CE EN 567 : 2013 Ø8-13 mm CE EN 12841 : 2006-B Ø10-13 mm 100 kg
Tract up		Ø 8 < 11 mm	80 g	CE EN 567 : 2013 Ø8-13 mm

DATA





ROPES FOR DIFFICULT AREA ACCESS


ACCESS 10,5 mm


Thanks to the UNICORE Process, Access ropes reach a new level in security. In effect, the UNICORE Process integral to this 10.5 mm rope will secure most delicate operations, whilst retaining lightness and flexibility.



-  BCSA105.100.B (100m)
- BCSA105.200.B (200m)
- BCSA105.500.B (500m)
- BCSA105.30.B (30m) **ON REQUEST**
- BCSA105.40.B (40m) **ON REQUEST**
- BCSA105.50.B (50m) **ON REQUEST**
- BCSA105.60.B (60m) **ON REQUEST**

-  BCSA105.30TERM.B (30m) **ON REQUEST**
- BCSA105.40TERM.B (40m) **ON REQUEST**
- BCSA105.50TERM.B (50m) **ON REQUEST**
- BCSA105.60TERM.B (60m) **ON REQUEST**


-  BCSA105.100.O (100m)
- BCSA105.200.O (200m)
- BCSA105.500.O (500m)
- BCSA105.30.O (30m) **ON REQUEST**
- BCSA105.40.O (40m) **ON REQUEST**
- BCSA105.50.O (50m) **ON REQUEST**
- BCSA105.60.O (60m) **ON REQUEST**


-  BCSA105.30TERM.O (30m) **ON REQUEST**
- BCSA105.40TERM.O (40m) **ON REQUEST**
- BCSA105.50TERM.O (50m) **ON REQUEST**
- BCSA105.60TERM.O (60m) **ON REQUEST**


ACCESS 11 mm


With UNICORE as standard, bonding core and sheath for maximum security in all situations.



-  BCSA11.100.R (100m)
- BCSA11.200.R (200m)
- BCSA11.500.R (500m)
- BCSA11.30.R (30m) **ON REQUEST**
- BCSA11.40.R (40m) **ON REQUEST**
- BCSA11.50.R (50m) **ON REQUEST**
- BCSA11.60.R (60m) **ON REQUEST**

-  BCSA11.30TERM.R (30m) **ON REQUEST**
- BCSA11.40TERM.R (40m) **ON REQUEST**
- BCSA11.50TERM.R (50m) **ON REQUEST**
- BCSA11.60TERM.R (60m) **ON REQUEST**

-  BCSA11.100.Y (100m)
- BCSA11.200.Y (200m)
- BCSA11.500.Y (500m)
- BCSA11.30.Y (30m) **ON REQUEST**
- BCSA11.40.Y (40m) **ON REQUEST**
- BCSA11.50.Y (50m) **ON REQUEST**
- BCSA11.60.Y (60m) **ON REQUEST**

-  BCSA11.30TERM.Y (30m) **ON REQUEST**
- BCSA11.40TERM.Y (40m) **ON REQUEST**
- BCSA11.50TERM.Y (50m) **ON REQUEST**
- BCSA11.60TERM.Y (60m) **ON REQUEST**

ANTIPODES 10,5 mm

Very tough, this is the established standard rope for work at height. Same construction as the INDUSTRIE 10.5 mm.





-  BCS105.50 (50m)
- BCS105.100 (100m)
- BCS105.200 (200m)
- BCS105.500 (500m)

ANTIPODES 11,5 mm

Great abrasion resistance for the most demanding applications.



-  BCS115.100 (100m)
- BCS115.200 (200m)
- BCS115.50 (50m) **ON REQUEST**
- BCS115.60 (60m) **ON REQUEST**



-  BCS115.200.R (200m)
- BCS115.50.R (50m) **ON REQUEST**
- BCS115.60.R (60m) **ON REQUEST**

INDUSTRIE 10,5 mm



This rope is specially adapted to the requirements of work at height companies.



-  BCS1105.50 (50m)
- BCS1105.100 (100m)
- BCS1105.200 (200m)
- BCS1105.500 (500m)
- BCS1105.10 (10m) **ON REQUEST**
- BCS1105.20 (20m) **ON REQUEST**
- BCS1105.30 (30m) **ON REQUEST**
- BCS1105.40 (40m) **ON REQUEST**
- BCS1105.60 (50m) **ON REQUEST**

-  BCS1105.10TERM (10m)
- BCS1105.20TERM (20m)
- BCS1105.30TERM (30m)
- BCS1105.40TERM (40m)
- BCS1105.50TERM (50m)
- BCS1105.60TERM (60m)
- BCS1105.80TERM (80m)
-  BCS1105.50TERM2 (50 m)

-  BCS1105.50.R (50m)
- BCS1105.100.R (100m)
- BCS1105.200.R (200m)
- BCS1105.500.R (500m)
- BCS1105.10.R (10m) **ON REQUEST**
- BCS1105.20.R (20m) **ON REQUEST**
- BCS1105.30.R (30m) **ON REQUEST**
- BCS1105.40.R (40m) **ON REQUEST**
- BCS1105.60.R (50m) **ON REQUEST**

-  BCS1105.10TERM.R (10m) **ON REQUEST**
- BCS1105.20TERM.R (20m) **ON REQUEST**
- BCS1105.30TERM.R (30m) **ON REQUEST**
- BCS1105.40TERM.R (40m) **ON REQUEST**
- BCS1105.50TERM.R (50m) **ON REQUEST**
- BCS1105.60TERM.R (60m) **ON REQUEST**
- BCS1105.80TERM.R (80m) **ON REQUEST**
-  BCS1105.50TERM2.R (50 m)

INDUSTRIE 11 mm

An ideal rope with no diameter restrictions for security in work at height.



BCSI1150.B (50m)
BCSI11100.B (100m)
BCSI11200.B (200m)
BCSI11500.B (500m)



BCSI11100.B (100m)
BCSI11200.B (200m)



BCSI1150 (50m)
BCSI11100 (100m)
BCSI11200 (200m)
BCSI11500 (500m)
BCSA1110 (10m) **ON REQUEST**
BCSA1120 (20m) **ON REQUEST**
BCSA1130 (30m) **ON REQUEST**
BCSA1140 (40m) **ON REQUEST**
BCSA1160 (60m) **ON REQUEST**



BCSI1150.R (50m)
BCSI11100.R (100m)
BCSI11200.R (200m)
BCSI11500.R (500m)
BCSA1110.R (10m) **ON REQUEST**
BCSA1120.R (20m) **ON REQUEST**
BCSA1130.R (30m) **ON REQUEST**
BCSA1140.R (40m) **ON REQUEST**
BCSA1160.R (60m) **ON REQUEST**



BCSI1110TERM (10m)
BBCI1120TERM (20m)
BCSI1130TERM (30m)
BCSI1140TERM (40m)
BCSI1150TERM (50m)
BCSI1160TERM (60m)



BCSI1110TERM.R (10m)
BCSI1120TERM.R (20m)
BCSI1130TERM.R (30m)
BCSI1140TERM.R (40m)
BCSI1150TERM.R (50m)
BCSI1160TERM.R (60m)



BCSI1110TERM2.R (10m)
BCSI1120TERM2.R (20m)
BCSI1130TERM2.R (30m)
BCSI1150TERM2.R (50m)
BCSI1160TERM2.R (60m)



INDUSTRIE 12 mm

An ideal work at height rope when a large rope diameter is required for greater security.



BCSI12200 (200m)
BCSA1150 (50m) **ON REQUEST**
BCSA11100 (100m) **ON REQUEST**



BCSI1250TERM **ON REQUEST**



BCSI12200.R (200m)
BCSA1150.R (50m) **ON REQUEST**
BCSA11100.R (100m) **ON REQUEST**



CONTRACT 10,5 mm

Type A rope with the optimum balance quality/price.



BCS105C20 (20m)
BCS105C30 (30m)
BCS105C40 (40m)
BCS105C50 (50m)
BCS105C60 (60m)

BCS105C80 (80m)
BCS105C100 (100m)
BCS105C200 (200m)
BCS105C500 (500m)



SEGMENT 11 mm

Rope for work at height with the optimum quality price ratio.



BCS11S50 (50m)
BCS11S60 (60m)
BCS11S100 (100m)
BCS11S200 (200m)
BCS11S500 (500m)

BCS11S30 (30m) **ON REQUEST**
BCS11S80 (80m) **ON REQUEST**



TOP WORK 10,5 mm

Specially developed in collaboration with one of the principal oil companies for use in difficult conditions on oil rigs. Great handling and maximum durability.



BCSPW105200 (200m)
BCSPW10550 (50m)
BCSPW10560 (60m)
BCSPW105100 (100m)



BCSPW10550TERM (50m) **ON REQUEST**
BCSPW10560TERM (60m) **ON REQUEST**



NORTH SEA 11 mm

Dynamic ropes cushion impacts and must be used during certain procedures to absorb the energy of possible falls.



BCSPW11200 (200m)
BCSPW1150 (50m) **ON REQUEST**
BCSPW1160 (60m) **ON REQUEST**
BCSPW11100 (100m) **ON REQUEST**



BCSPW1150TERM (50m) **ON REQUEST**
BCSPW1160TERM (60m) **ON REQUEST**



DATA



UNIVERSAL ROPE TO BOTH STANDARDS EN 892 & EN 1891

DYNASTAT 10,5 mm

Security rope which conforms to 2 standards, both the semi-static and the dynamic rope standards.



CAREFUL : A slippage between core/sheath can happened when it is used with a descender



BCDS105.50 (50m)
BCDS105.60 (60m)
BCDS105.40 (40m) **ON REQUEST**



BCDS105.40TERM (40m) **ON REQUEST**
BCDS105.50TERM (50m) **ON REQUEST**
BCDS105.60TERM (60m) **ON REQUEST**


FLOATING ROPE & ROPE FOR DIFFICULT AREA ACCESS

PRO WATER 11 mm

Floating type A semi-static rope for work at height above water (off-shore wind farms, oil rigs).



BCSW11.100 (100m)
BCSW11.200 (200m)
BCSW11.50 (50m) **ON REQUEST**
BCSW11.60 (60m) **ON REQUEST**



DYNAMIC ROPES

TOP GUN II 10,5 mm

Dynamic ropes cushion impacts and must be used during certain procedures to absorb the energy of possible falls.



BC105T.50.G (50m)
BC105T.60.G (60m)
BC105T.70.G (70m)
BC105T.200.G (200m)



BC105.60TERM.G (60m) **ON REQUEST**



BC105T.50.B (50m)
BC105T.60.B (60m)
BC105T.70.B (70m)
BC105T.200.B (200m)



BC105.60TERM.B (60m) **ON REQUEST**

APOLLO II 11 mm

Dynamic ropes cushion impacts and must be used during certain procedures to absorb the energy of possible falls.



BC11A.50.R (50m)
BC11A.60.R (60m)
BC11A.200.R (200m)



BC11A.50.A (50m)
BC11A.60.A (60m)
BC11A.200.A (200m)

RESCUE ROPES

RESCUE 10,5 mm

Semi-static type A rope with a polyester sheath. Its fluorescent orange colour make it particularly suited for use in rescues.



BCSR105.200 (200m)
BCSR105.50 (50m) **ON REQUEST**
BCSR105.100 (100m) **ON REQUEST**



BCSR105.50TERM **ON REQUEST**

RESCUE VLS 11,3 mm

The Rescue VLS is a very low stretch rope designed for technical rope rescue. VLS for Very Low Stretch.



Elongation 50-150kg : 0,8%



BCSR113.200Y (200m)
BCSR113.50Y (50m) **ON REQUEST**
BCSR113.60Y (60m) **ON REQUEST**
BCSR113.100Y (100m) **ON REQUEST**



BCSR113.50TERM.Y (50m) **ON REQUEST**
BCSR113.60TERM.Y (60m) **ON REQUEST**




BCSR113.200.BK (200m)
BCSR113.50.BK (50m) **ON REQUEST**
BCSR113.100.BK (100m) **ON REQUEST**



BCSR113.50TERM.BK (50m) **ON REQUEST**

REACTIVE 10,5 mm

A specialist rope for rescues in low light conditions. Highly visible as soon as a light source is pointed towards it thanks to a reflective yarn that is woven through the sheath.

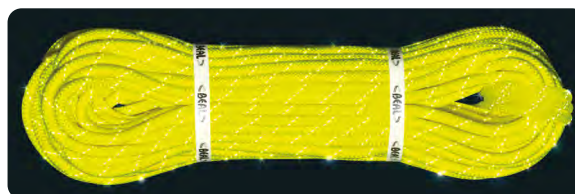

BCSRR105.200 (200m)
BCSRR105.50 (50m) **ON REQUEST**
BCSRR105.100 (100m) **ON REQUEST**



BCSRR105.50TERM **ON REQUEST**

⚠ Warning

The reflective yarn is very fragile and wears rapidly when subjected to abrasion, although it maintains its reflective properties. Its wear does not affect the rope's strength.

RESCUE HALF INCH 13 mm

Rope for rescue teams using American methods.



BCSR13.50 (50m)
BCSR13.300 (300m)

DATA



ROPES RESISTANT TO HIGH TEMPERATURES

RAIDER 10,5 mm

Semi-static Type B rope with an Aramid sheath capable of withstanding a long period close to a major source of heat.



BCSK105R.200 (200m)
BCSK105R.50 (50m) **ON REQUEST**
BCSK105R.60 (60m) **ON REQUEST**
BCSK105R.70 (70m) **ON REQUEST**



BCSK105R.50TERMK (50m) **ON REQUEST**
BCSK105R.50TERMK (60m) **ON REQUEST**



Sheath Aramid Core



RAIDER 11 mm

Semi-static Type B rope with an Aramid sheath capable of withstanding a long period close to a major source of heat.



BCSK11R.200 (200m)
BCSK11R.50 (50m) **ON REQUEST**
BCSK11R.60 (60m) **ON REQUEST**
BCSK11R.70 (70m) **ON REQUEST**
BCSK11R.100 (100m) **ON REQUEST**



BCSK11R.50TERMK (50m) **ON REQUEST**
BCSK11R.60TERMK (60m) **ON REQUEST**
BCSK11R.70TERMK (70m) **ON REQUEST**



Sheath Aramid Core



RAIDER TACTIC 11 mm

The thickness of the sheath of RAIDER TACTIC has been reduced and the quantity of the core increased Sheath Aramid Core to allow it to be certified as a Type A rope.




BCSK11RT.200 (200m)
BCSK11RT.50 (50m) **ON REQUEST**
BCSK11RT.60 (60m) **ON REQUEST**
BCSK11RT.100 (100m) **ON REQUEST**



BCSK11RT.50TERMK (50m) **ON REQUEST**
BCSK11RT.60TERMK (60m) **ON REQUEST**
BCSK11RT.70TERMK (70m) **ON REQUEST**



Sheath Aramid Core



ROPES RESISTANT TO CHEMICAL PRODUCTS

HOTLINE 11 mm

Semi-static rope with an interior sheath in Aramid, covered by a classic sheath. HOTLINE rope allows access in the presence of certain dangerous chemicals.



BCSK11.200 (200m)
BCSK11.20 (20m) **ON REQUEST**
BCSK11.30 (30m) **ON REQUEST**
BCSK11.40 (40m) **ON REQUEST**
BCSK11.50 (50m) **ON REQUEST**
BCSK11.100 (100m) **ON REQUEST**



BCSK11.20TERMK (20m) **ON REQUEST**
BCSK11.30TERMK (30m) **ON REQUEST**
BCSK11.40TERMK (40m) **ON REQUEST**
BCSK11.50TERMK (50m) **ON REQUEST**



Sheath Aramid Core



RAIDER 11 mm

Semi-static Type B rope with an Aramid sheath capable of withstanding a long period close to a major source of heat.



BCSK11R.200 (200m)
BCSK11R.50 (50m) **ON REQUEST**
BCSK11R.60 (60m) **ON REQUEST**
BCSK11R.70 (70m) **ON REQUEST**
BCSK11R.100 (100m) **ON REQUEST**



BCSK11R.50TERMK (50m) **ON REQUEST**
BCSK11R.60TERMK (60m) **ON REQUEST**
BCSK11R.70TERMK (70m) **ON REQUEST**



Sheath Aramid Core



LIGHTWEIGHT ROPES

ANTIPODES 9 mm

Semi-Static type B rope, ultra light, but necessitating great care during use.



BCS09.100 (100m)
BCS09.200 (200m)
BCS09.50 (50m) **ON REQUEST**
BCS09.60 (60m) **ON REQUEST**



BCS09.100.R (100m)
BCS09.200.R (200m)
BCS09.50.R (50m) **ON REQUEST**
BCS09.60.R (60m) **ON REQUEST**



ANTIPODES 10 mm

The lightest of the type A ropes with a margin of security sufficient for some industrial uses.



BCS10.100 (100m)
BCS10.200 (200m)
BCS10.50 (50m) **ON REQUEST**
BCS10.60 (60m) **ON REQUEST**



BCS10.100.R (100m)
BCS10.200.R (200m)
BCS10.50.R (50m) **ON REQUEST**
BCS10.60.R (60m) **ON REQUEST**



SPECIAL ROPES

AUSTRALIS 11,5 mm

Specially developed to meet the requirements of Australian standard AS4143.3, this very low stretch rope has a sheath in polyester and is constructed like the American ropes.



BCSA115.200 (200m)



Strengths :

- Reduction in shrinkage (polyester).
- Better heat resistance (Melting point of polyester 260° C).
- Better abrasion resistance due to a thick sheath.

ERGO 12,5 mm

Designed to meet the needs of firefighters in their different tasks, conforming to civil security code NIT no. 129-83-g2 and to the Standard EN 1891.



BCS125.30 (30m)
BCS125.60 (60m)
BCS125.100 (100m)
BCS125.200 (200m)
BCS125.40 (40m) **ON REQUEST**
BCS125.50 (50m) **ON REQUEST**



BCS125.30TERM (30m) **ON REQUEST**
BCS125.40TERM (40m) **ON REQUEST**
BCS125.50TERM (50m) **ON REQUEST**
BCS125.60TERM (60m) **ON REQUEST**



BCS125.30TERM2 (30m) **ON REQUEST**
BCS125.60TERM2 (60m) **ON REQUEST**



DATA



ROPES FOR TREE WORK

BILOBA 11,5 mm

A lightweight arborist rope specially designed for use with mechanical Prusiks. Its double braided construction makes the rope particularly supple. Fluorescent colours ensure the rope is highly visible. Materials: polyester sheath, polyamide core



BCSE115.200 (200m)



BCSE115.20TERM (20m)
 BCSE115.30TERM (30m)
 BCSE115.35TERM (35m)
 BCSE115.40TERM (40m)
 BCSE115.50TERM (50m)
 BCSE115.60TERM (60m)



GINKGO 12 mm

Made along the same lines as the BAOBAB, its thinner diameter makes a lighter rope, more supple and easier to handle than BAOBAB. It benefits from a new, glueless procedure for bonding the sheath onto the core, preventing all slippage, but still allowing splices to be made.



BCSE115.200 (200m)



BCSE12.20TERM (20m)
 BCSE12.30TERM (30m)
 BCSE12.35TERM (35m)
 BCSE12.40TERM (40m)
 BCSE12.50TERM (50m)
 BCSE12.60TERM (60m)



BCSE12.20TERM2 (20m)
 BCSE12.30TERM2 (30m)
 BCSE12.35TERM2 (35m)
 BCSE12.40TERM2 (40m)
 BCSE12.50TERM2 (50m)
 BCSE12.60TERM2 (60m)

Découpe possible 3m **ON REQUEST**
 Découpe possible 4m **ON REQUEST**
 Découpe possible 5m **ON REQUEST**



BAOBAB 13,5 mm




Its braiding results from the technology of American tree workers, giving it great qualities of strength, pliability and easy handling. The UNICORE process which bonds the core and sheath prevents sheath slippage during use with self-locking loops.



BCSE135.200 (200m)



BCSE135.30TERM2 (30m)

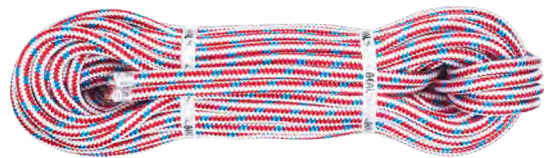

BONSAÏ 13 mm

This multi-use rope, with an excellent handling/solidity balance, allows you to undertake all types of tree work in full security.



BCSE13.200 (200m)



BCSE13.20TERM (20m)
 BCSE13.40TERM (40m)



BCSE13.30TERM2 (30m)



ROPES FOR PRUSIKS

REGATE 10 mm


Its double braid polyester serves to make prusik loops.
This 10 mm diameter rope, with high abrasion resistance, runs perfectly.



BREG10.100 (100m)

PRUSIKS VOLCANO 8 / 10 / 12 mm

Short lengths of rope with sewn terminations for constructing self-locking (prusik) loops. These ropes have a 50 % aramid construction intermixed with polyester filaments. Prusiks made from classic ropes have a very short life, because they glaze in use due to the effect of friction. The presence of 50 % of highly thermally resistant aramid fibres in VOLCANO protect it against melting and thus greatly increases its lifetime. Available in 10 and 12 mm, and 70 and 90 cm lengths, to suit different types of knots.

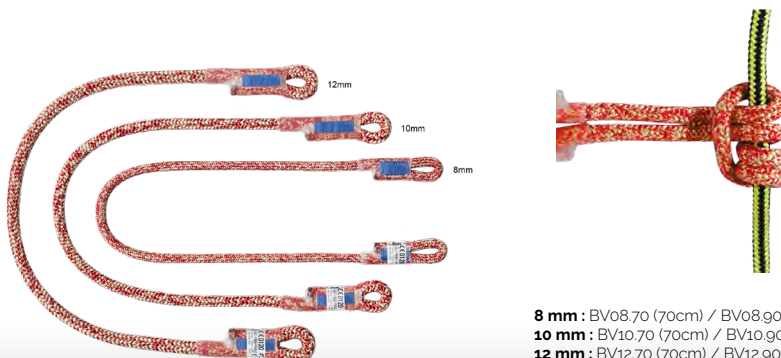

8 mm : BV08.70 (70cm) / BV08.90 (90cm)
10 mm : BV10.70 (70cm) / BV10.90 (90cm)
12 mm : BV12.70 (70cm) / BV12.90 (90cm)

VOLCANO 8 mm




BCSV08

RETENTION ROPES

The regulations require the application of a coefficient of 7 to all lifting ropes. Breaking load divided by 7 = WLL (Working Load Limit). The weight of the branches must not exceed the Working Load Limit for dismantling in total security. BEAL retention ropes are colour coded by diameter and thus by strength in order to avoid errors.

GOLIATH

Coming from the technology of American tree dismantling ropes, GOLIATH is a static double braid rope of 100 % polyester pre-stretched with a polyurethane coating for better abrasion resistance. This rope has an excellent strength/diameter ratio.

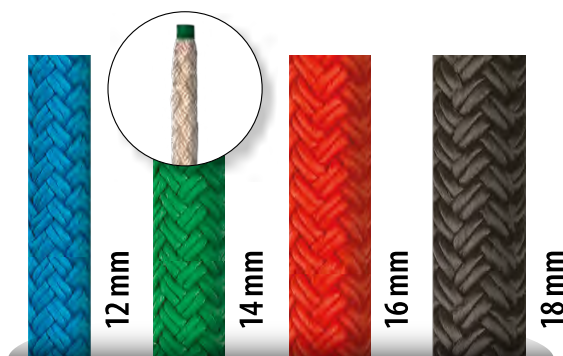

BLG12 (12mm) BLG14 (14mm) BLG16 (16mm) BLG18 (18mm)


DATA



DATA

ACCESSORY CORDS

Multi-use: BEAL accessory cords from 4 to 8 mm in diameter conform to the requirements of the UIAA and European Standards.

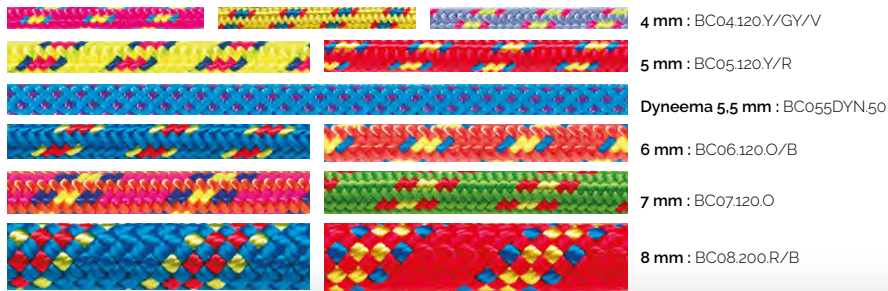

COMMANDE 7 mm



WEBBING

Tubular for their flexibility or flat for their durability, webbings are specifically used in belay slings. Cut webbing must always be tied with a tape knot.

TUBULAR - 16 mm



BST16.G

FLAT SUPER - 18 mm



BSP18.B

FLAT - 26 mm



BSP26UNI.BK

TUBULAR - 26 mm



BST26.B



BSP18.GY



BSP26UNI.F



BST26.R



BSP18.O

FLAT - 45 mm



BSP45



BSP18.R



BSP26UNI.G

POLYAMIDE FLAT SLINGS 18 mm



50 cm
100 cm

30 cm
80 cm
175 cm

60 cm
150 cm

30 cm 100 cm
40 cm 120 cm
50 cm 150 cm
60 cm 175 cm
80 cm

40 cm
120 cm

40 cm Orange/Black: BSA40.5
60 cm Red/Black: BSA60.5
80 cm Blue/Black: BSA80.5

100 cm Grey/Black: BSA100.5
120 cm Orange/Black: BSA120.5
150 cm Red/Black: BSA150.5

DYNEEMA FLAT SLINGS 10 mm



60 cm

BSAD10.60.5

120 cm

BSAD10.120.5

180 cm

BSAD10.180.5

240 cm

BSAD10.240.5

DYNALOOP

A dynamic rope sling for work restraint. The dynamic characteristics of this sling are far superior to those of a traditional static lanyard or webbing sling.

Strengths :

- ▶ Perfectly adapted for work positioning at height.
- ▶ The use of a dynamic rope can improve the level of safety.
- ▶ Sewn termination protected by a heat shrink cover.
- ▶ Breaking load 2200 daN
- ▶ Marked with a unique serial number



EYE LOOP


A heavy duty tubular webbing sling with connecting buckle and wear indicator.

Strengths :

- ▶ Strength 30kN
- ▶ Strength 22kN when used in a girth hitch configuration
- ▶ Double thickness webbing with a red webbing liner. The liner acts as a wear indicator: the

product should be retired when the red webbing becomes visible.

- ▶ Strength of the red webbing 22kN
- ▶ Width 19mm
- ▶ Material: Polyamide
- ▶ Available in 4 lengths: 60 cm yellow / 80 cm green / 120 cm red / 150 cm black

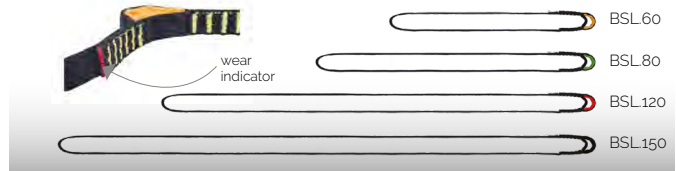

ESCAPER

Detachable anchor system. The ESCAPER allows you to use a single length of rope and to rappel it from remove locations. It can be used with all rope diameters, the limits being imposed by the braking device that is used with the rope. It works with rope lengths up to 80m. The length can be limited by the friction of the rope.

To retrieve the ESCAPER, pull then / release the rope. It takes an average of 8 consecutive pull/release motions to detach and retrieve the ESCAPER.

Points forts :

- ▶ Extremely safe, it only requires a tension of 10 kg to avoid the locking system from sliding.
- ▶ A total loosening of the tension on the rope generates a sliding of a few centimeters.
- ▶ A sliding of at least 50 cm is necessary to detach the system.
- ▶ Very light: made of rope, webbing and bungee band (100 % textile).



ANCHOR STROP

Semi-temporary anchor made from 7 mm galvanised steel cable with plastic cover and 2 swaged terminations.

Strengths :

- ▶ Available in 0,5 m and 1 m lengths.
- ▶ Allows making of semi-temporary anchors.
- ▶ Strength 2500 kg.
- ▶ Weight: 50 cm = 260 g - 1 m = 434 g.



50 cm : BMANCH.050
1 m : BMANCH.100

ROOF ANCHOR NEW 2021

Discreet metal anchor for roofing.
Light, discreet, attached directly to the wooden frame, the ROOF ANCHOR is an ideal anchor on the roof.

Strengths :

- ▶ Only 2 screws to set it up.
- ▶ Almost invisible on a roof.
- ▶ Durable thanks to its stainless-steel cable.



BMANCH.ROOF

MOOR NEW 2021

Bent hanger with a large opening to facilitate the carabiner clipping and a vertical shifted anchor point.
Raised dots at the back of the hanger prevent it from turning.

2 different types of steel available:

- Standard steel for indoor use or as temporary anchor.
- Reinforced Stainless steel for classical exterior environments except in extremely corrosive environments.



MOOR



MOOR BOLT

MOOR Steel 10 mm (x20) BMH.M10
MOOR Stainless Steel 10 mm (x20) BMH.M10SS
MOOR Steel 12 mm (x20) BMH.M12
MOOR Stainless Steel 12 mm (x20) BMH.M12SS

MOOR BOLT Steel 10 mm (x20) BMH.MB10
MOOR BOLT Stainless Steel 10 mm (x20) BMH.MB10SS
MOOR BOLT Steel 12 mm (x20) BMH.MB12
MOOR BOLT Stainless Steel 12 mm (x20) BMH.MB12SS

DATA

ADJUSTABLE LANYARDS

SWANIE LINE

Adjustable anchor allowing a versatile solution on 11mm rope :

- Adjustable lanyard to maintain comfortable and accurate position at the workstation.
- Temporary anchor.


Strengths :

- ▶ The ergonomic shape of the SWANIE handle allows for a quick and precise adjustment.
- ▶ Tubular sleeve to protect the rope.
- ▶ The rope can be replaced when it is worn out. A simple 6-sided key is enough.
- ▶ In anchor configuration, two simultaneous users are allowed .



NEW 2021

Recommended karabiner on SWANIE LINE :
BE LINK BI MATIC.

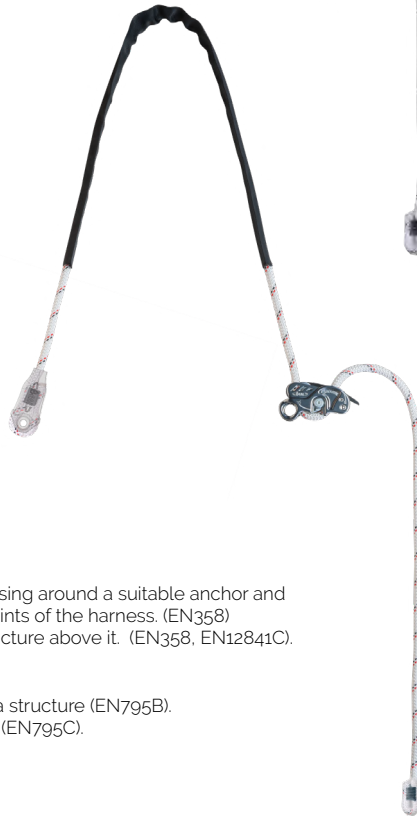

Work positioning at the workstation, two possible implementations :

- Doubled : to position comfortably at the workstation, for example by passing around a suitable anchor and attaching the two ends of the SWANIE LINE to the lateral attachment points of the harness. (EN358)
- Between the operator's ventral point and the anchorage point of the structure above it. (EN358, EN12841C).

In temporary anchor use, two possible implementations :

- Anchoring : adjusting to the desired length of the SWANIE LINE around a structure (EN795B).
- Horizontal lifeline: adapting to the length required between two anchors (EN795C).

SWANIE LINE 2 m: BLSS.02
SWANIE LINE 3 m: BLSS.03
SWANIE LINE 5 m: BLSS.05
SWANIE LINE 10 m: BLSS.10
SWANIE LINE 15 m: BLSS.15
SWANIE LINE 20 m: BLSS.20



SWANIE LINE ROPE 2 m: BLSSR.02
SWANIE LINE ROPE 3 m: BLSSR.03
SWANIE LINE ROPE 5 m: BLSSR.05
SWANIE LINE ROPE 10 m: BLSSR.10
SWANIE LINE ROPE 15 m: BLSSR.15
SWANIE LINE ROPE 20 m: BLSSR.20



DYNAPRO FIT I & DYNAPRO FIT V


NEW 2021

Dynapro Fit I

Simple progression and adjustable rope lanyard, light and compact.

Dynapro Fit V

Double progression and adjustable rope lanyard, light and compact.

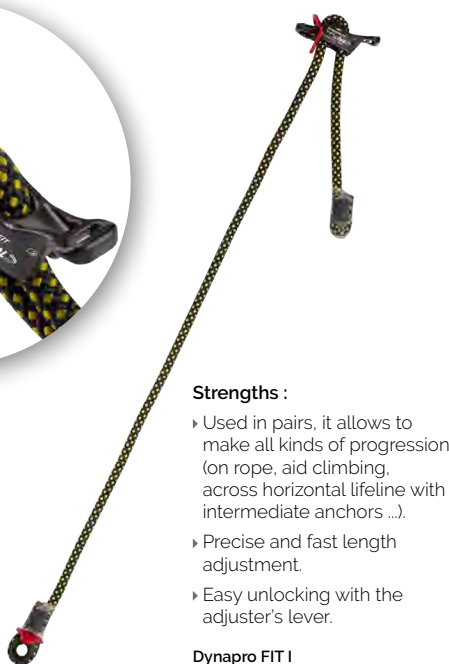

Strengths :

- ▶ Used in pairs, it allows to make all kinds of progression (on rope, aid climbing, across horizontal lifeline with intermediate anchors ...).
- ▶ Precise and fast length adjustment.
- ▶ Easy unlocking with the adjuster's lever.

Dynapro FIT I
BLDPFI



Strengths :

- ▶ Precise and fast length adjustment.
- ▶ Easy unlocking with the adjuster's lever.

Dynapro FIT V
BLDPFV

Recommended karabiner on the adjuster and at the end of the lanyard: Be Link Bi Matic.

ADJUST'AIR

Adjustable (EN358) work positioning lanyard in 12.5mm semi-static rope.




Strengths :

- ▶ Ergonomic, captive rope clamp.
- ▶ Available in 3 lengths: 2 m / 3 m / 5 m.
- ▶ Sewn termination with reinforced eye to protect the rope.
- ▶ Removable cover allows the inspection of termination stitches.
- ▶ Tubular protection webbing for the rope.
- ▶ Marked with a unique serial number and labelled to accommodate personal markings.

2 m: BLSAA.200
3 m: BLSAA.300
5 m: BLSAA.500

PINCH

System for securing the karabiner at the end of a rope or tape lanyard. Made out of particularly strong material, it ensures effective protection against abrasion when in contact with the rock.



BLP

DATA




NOT ADJUSTABLE DYNAMIC LANYARDS

DYNAPRO

Simple dynamic rope lanyard with sewn termination for work restraint. The dynamic characteristics of this lanyard are far superior to those of a traditional static lanyard.

Strengths :

- ▶ Perfectly adapted for work positioning at height.
- ▶ Sewn termination with reinforced eye to protect the rope as well as a PINCH to assist connector orientation.
- ▶ Enhanced level of protection thanks to the use of a dynamic rope.

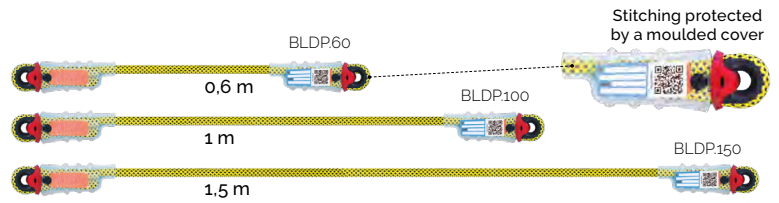


- ▶ Removable cover allows the inspection of termination stitches.
- ▶ Marked with a unique serial number and labelled to accommodate personal markings.

DYNAPRO 8

Adjustable, dynamic rope lanyard with sewn terminations. The dynamic performance of this lanyard is greatly superior to that of traditional static lanyards. By making your own double fig-8 knot point of attachment to your harness you can obtain an asymmetric 'V' lanyard adjusted to your needs. The lanyard thus made, in conformity with the notice, meets Standard EN 354.

Strengths :

- ▶ Possible to clip long or short.
- ▶ Ability to pass intermediate anchors thanks to the 2 branches.
- ▶ Sewn terminations fitted with a sleeve to protect the rope and a pinch to hold the karabiner in position.

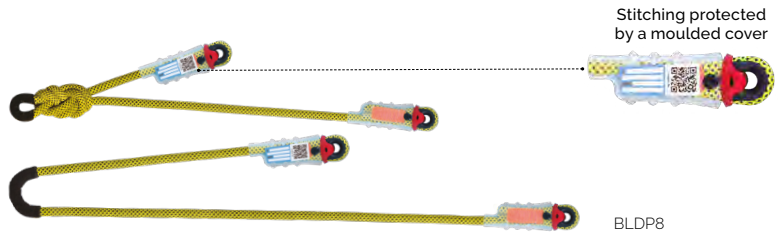


- ▶ Improved security in the event of a fall (even of high factor) on the lanyard because of the use of dynamic rope.
- ▶ Attach with a maillon rapide or directly onto the chest ring.

DYNAPRO V

Assymmetric 'V' dynamic rope lanyard with sewn terminations. The dynamic performance of this lanyard is greatly superior to that of traditional static lanyards.

Strengths :

- ▶ Perfectly adapted to work at height and rescue.
- ▶ Ability to clip-in short or long.
- ▶ Ability to pass intermediate anchors thanks to the 2 branches.
- ▶ Sewn terminations fitted with a sleeve to protect the rope and a pinch to hold the karabiner in position.

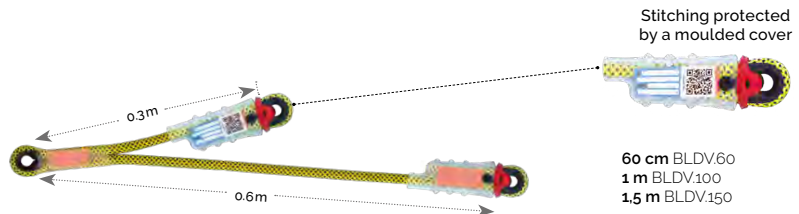

- ▶ Improved security in the event of a fall (even of high factor) on the lanyard because of the use of dynamic rope.
- ▶ Secure with a maillon rapide.

NOT ADJUSTABLE STATIC LANYARDS

Single or double lanyard with sewn termination for restraint at the workstation or progression on a restraint lifeline. This versatile lanyard allows for temporary anchorages.


Strengths :

- ▶ Perfectly suited for working at height.
- ▶ Stitched termination with PINCH to lock the carabiner at its end.
- ▶ The connection to the harness is done by a lark head.
- ▶ Marked with a unique serial number.

NEXUS I



NEXUS V

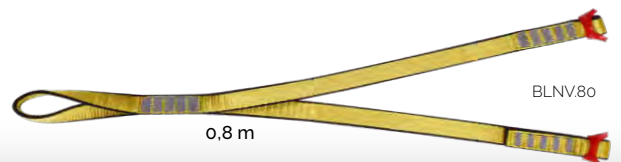


FALL ARREST LANYARDS

DYNAPRO-AIR HOOK

Fall arrest lanyard with integrated energy absorber (EN355 + EN 362) designed for work environments with a fall risk.

Strengths :

- › ABSORB'AIR absorber combined with DYNAPRO lanyard.
- › Supplied with an AIR-HOOK LARGE connector to connect to the anchor point and an O'LIGHT 3-MATIC connector to connect to the harness.
- › Sewn terminations with reinforced eyes to protect the rope.
- › Removable cover allows the inspection of termination stitches.
- › Marked with a unique serial number and equipped with a label to accommodate personal markings.
- › Available in 3 lengths (including connectors and absorber): 1m / 1.5m / 2m.

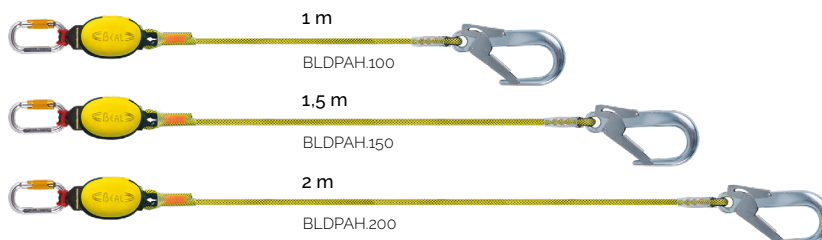


DYNAPRO-AIR V HOOK

V-shaped fall arrest lanyard with integrated energy absorber (EN355 + EN362). Designed as a progression lanyard for work environments with a fall risk, it is well adapted to structures where anchor points are cables, bars or beams.

Strengths :

- › ABSORB'AIR absorber combined with a V-shaped lanyard.
- › V-shaped lanyard with two symmetrical rope legs for progression using fall arrest techniques.
- › Supplied with 2 AIR-HOOK LARGE connectors to clip anchor points and an O'LIGHT 3-MATIC connector to connect to the harness.
- › Sewn terminations with reinforced eyes to protect the rope.
- › 2 removable covers allow the inspection of termination stitches.
- › Marked with a unique serial number and equipped with a label to accommodate personal markings.
- › Available in 2 lengths (including connectors and absorber): 1m / 1.5m

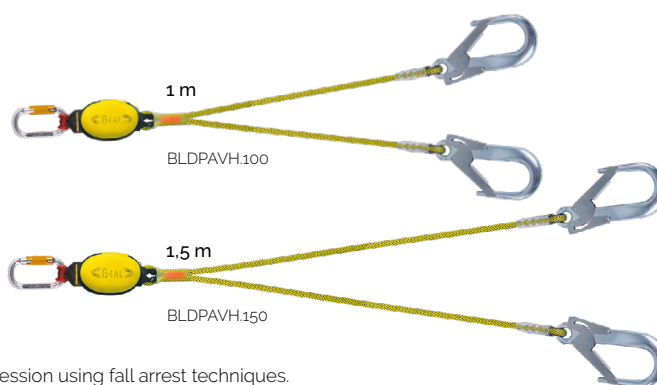


DYNAPRO-AIR V HOOK XL

V-shaped fall arrest lanyard with integrated energy absorber (EN355 + EN 362). Designed as a progression lanyard for work environments with a fall risk, the size of its connectors make it particularly suited to metal structures.

Strengths :

- › ABSORB'AIR absorber combined with a V-shaped lanyard.
- › V-shaped lanyard with two symmetrical rope legs for progression using fall arrest techniques. Its 2 two metre legs allow fluid progression on large structures.
- › Supplied with 2 AIR-HOOK XL connectors that can clip anchors on large structures as well as an O'LIGHT 3-MATIC connector to connect to the harness.
- › Sewn terminations with reinforced eyes to protect the rope.
- › 2 removable covers allow the inspection of termination stitches.
- › Marked with a unique serial number and equipped with a label to accommodate personal markings.
- › Available in 1 length (including connector and absorber): 2 m.

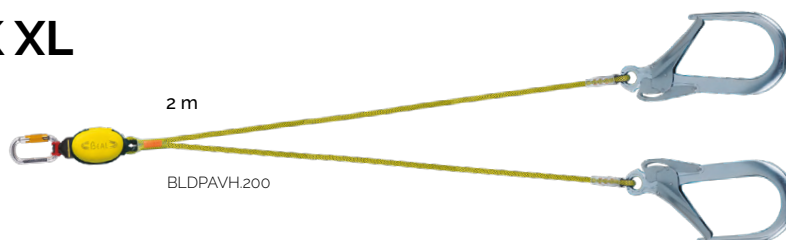

ABSORB'AIR

Webbing construction energy absorber. Energy is absorbed through the controlled tearing of the webbing's weft during deployment.

Strengths :

- › Compact and lightweight.
- › Easy to open semi-rigid pouch.
- › Easy to inspect in its entirety.
- › Easy to dry once unrolled.
- › Can be combined with a DYNAPRO lanyard to create a lanyard with energy absorber.
- › Marked with a unique serial number and labelled to accommodate personal markings as.



DATA



DATA

FALL ARREST HARNESSES

STYX RESCUE / STYX RESCUE JACKET

Lightweight and compact fall arrest harness with two attachment points: 1 sternal and 1 dorsal.

Strengths :

- ▶ Different coloured leg loops help distinguish them from the shoulder
- ▶ Straps and so accelerate fitting.
- ▶ The dorsal section contains an area to allow personal marking such as your company's name.



BHPSTR



BHPSTJR

WITH JACKET

The dorsal section contains an area to allow personal marking such as your company's name.

STYX FAST

A very light and compact fall arrest harness with 2 connection points : 1 sternal and 1 dorsal. Quick release buckles to the thighs and a foamed back allow a quick sitting. Versatile because it can be combined with a work position belt.



Strengths :

- ▶ Foamed shoulder and back straps for comfort and easy donning.
- ▶ Quick release buckles to the leg loops allows quick fitting.
- ▶ Possibility of adding a work position belt - EN358: STYXBELT.
- ▶ Straps with protection to avoid rubbing at the neck.
- ▶ 2 organiser gear loops to the hips.
- ▶ 2 connector hook loops to the shoulders.
- ▶ Differentiation in color between left and right parts to facilitate the setting up.
- ▶ 2 mini organiser gear loops to attach WORKSTATION accessories.




BHPSTF

WORKSTATION BELT

STYX BELT

Workstation belt. This adjustable belt makes it possible to adjust positioning rings to all morphologies or all situations by a simple sliding. The quick-release buckle offers a simple opening / closing. The belt is compatible with the STYXFAST harness.

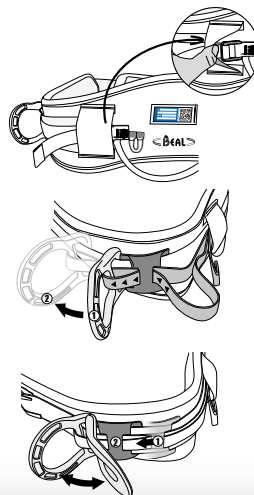

BHPSTB



Strengths :

- ▶ Two adjustable aluminum side rings.
- ▶ A wide foamed belt for maximum comfort.
- ▶ A quick buckle at the belt.
- ▶ A large organiser gear loop.
- ▶ Traceability: identification area.
- ▶ 6 mini organiser gear loops to attach WORKSTATION accessories.

FALL ARREST, ROPE ACCESS AND WORK POSITIONING HARNESS

OFF SHORE

Integral suspension harness with metal parts made of stainless steel. This harness is equipped with a sternal fall arresting point (EN361), two lateral points (EN358) and a ventral point (EN813) made of textile.



Strengths :

- › Textile suspension point which allows a great freedom of movement.
- › Quick release stainless steel thigh leg loop buckle for fast fitting.
- › 4 organiser gear loops to the belt.
- › 2 connector hook loops to the shoulders.
- › A knife holder on the shoulder.
- › Traceability: identification area.
- › Mini organiser gear loops for hanging WorkStation accessories.
- › The shoulder strap slides in the sternal ring allowing easy donning.



Off Shore S-M : BHPOFF.1
Off Shore L-XL : BHPOFF.2



DATA



FALL ARREST, ROPE ACCESS AND WORK POSITIONING HARNESS

SOLACE NEW 2021

Harness for work positioning, suspension and fall arrest.

Comfort :

- ▶ Adjustable front leg risers between leg loops and waist belt for precise adaptation to morphology.
- ▶ On the front area, shoulder straps spread out with clearance at the neck. This clearance is enhanced by the use of narrowed webbing.
- ▶ Slidable padded leg loops.
- ▶ Adjustable rear leg risers between leg loops and waist belt for better adaption to morphology when using the rear dorsal attachment.
- ▶ A wide waist belt with comfort extended on the upper edge, pleasant in suspension.

Ergonomics :

- ▶ Y-shaped straps to allow for a better positioning of the dorsal attachment point
- ▶ A quick release buckle on one shoulder strap allows for easy fitting without deregulating the harness.
- ▶ Two quick release buckles on the leg loops.
- ▶ Removable elastic to keep the chest ascender upright on the harness.
- ▶ Easy connection of the shoulder straps at the bottom of the harness thanks to the FLAT LINK connector that can also accommodate the HOLD UP chest ascender.

Traceability :

- ▶ A window at the back of the belt for simplified identification.



Solace S : BHPSO.1
Solace M-L : BHPSO.2
Solace XL : BHPSO.3

Accessories :

- ▶ On each shoulder there is a reusable fuse loop for storing the connectors of the fall arrest lanyards. In the event of a fall the stored lanyard will release allowing the fall arrest lanyard to uninterruptedly absorb energy.
- ▶ Each shoulder also has passing Velcro to position a fall arrest lanyard or radio.
- ▶ Five equipment loops.
- ▶ Six mini equipment loops to attach WORK STATION accessories.

AIR SIT

Stable and comfortable suspended work seat for rope access.



Strengths :

- ▶ Triangulation of the 2 lateral attachment points assists stability.
- ▶ Durable and breathable comfort padding.
- ▶ 2 plastic lateral gear loops are pre-shaped for ease of clipping.

SOLACE HOLD UP NEW 2021

Harness for work positioning, suspension and fall arrest perfectly configured for rope access. Very effective at ascending ropes thanks to the low position of the HOLD UP and its parallel orientation to the body.

Comfort :

- ▶ Junction before thighs-adjustable belt for better adaptation to morphology.
- ▶ In the front area, shoulder straps spread out with a clearance at the neck. This clearance is accentuated by the use of narrowed strap.
- ▶ Paddings of sliding thighs along the strap.
- ▶ Rear thigh-belt-adjustable junction.
- ▶ Significant height of the belt with comfort extended on the upper edge, pleasant in suspension.

Ergonomics :

- ▶ Y-shaped straps to allow for a better positioning of the dorsal attachment point
- ▶ A quick release buckle on one shoulder strap allows for easy fitting without deregulating the harness
- ▶ Two quick release buckles on the leg loops
- ▶ Removable elastic to keep the chest ascender upright on the harness.
- ▶ Easy connection of the shoulder straps at the bottom of the harness thanks to the FLAT LINK connector that can also accommodate the HOLD UP chest ascender.

Traceability :

- ▶ A window at the back of the belt for simplified identification.



Solace Hold up S : BHPSO0.1
Solace Hold up M-L : BHPSO0.2
Solace Hold up XL : BHPSO0.3

Accessories :

- ▶ On each shoulder there is a reusable fuse loop for storing the connectors of the fall arrest lanyards. In the event of a fall the stored lanyard will release allowing the fall arrest lanyard to uninterruptedly absorb energy.
- ▶ Each shoulder also has passing Velcro to position a fall arrest lanyard or radio.
- ▶ Five equipment loops.
- ▶ Six mini equipment loops to attach WORK STATION accessories.

FALL ARREST, ROPE ACCESS AND WORK POSITIONING HARNESS



BSAS

- ▶ 4 mini gear loops are equally available on the sides to attach 'AIR-LEASH' extendable tool holders or 2 'TOOL-BUCKET' tool pouches.
- ▶ A ring under the seat can be used to attach a bag.

HERO PRO

A fall arrest and work positioning harness.

Comfort :

- ▶ X shaped shoulder straps increase comfort and ensure excellent load distribution.
- ▶ The padded shoulder straps are held apart to minimize neck chafing.
- ▶ The waist belt, leg loops and shoulder straps are lined with breathable foam to improve comfort and to reduce perspiration.
- ▶ The waist belt's two lateral attachment loops can be folded back to minimise hindrance.
- ▶ The dorsal attachment point is made from steel.
- ▶ Two opening quick release buckles (one per leg loop) enable the harness to be easily fitted even with cumbersome footwear.
- ▶ 4 large, pre-shaped gear loops are positioned around the waist belt to easily accommodate all equipment.
- ▶ Mini gear loops compatible with item of the WorkStation.



Hero Pro S : BHPH.1
Hero Pro M-L : BHPH.2
Hero Pro XL : BHPH.3

Hero Pro Black S : BHPH.1.BK
Hero Pro Black M-L : BHPH.2.BK
Hero Pro Black XL : BHPH.3.BK

HERO PRO HOLD UP

A fall arrest and work positioning harness with ascender to aid rope ascents.


The harness is equipped with the HOLD UP compact chest ascender that is optimised for ascending ropes. The HOLD UP is designed to stay parallel to the user's body allowing the rope to slide easily through the device, making it particularly user friendly.

Comfort :

- ▶ X shaped shoulder straps increase comfort and ensure excellent load distribution
- ▶ The padded shoulder straps are held apart to minimise neck chafing.
- ▶ The waist belt's two lateral attachment loops can be folded back to minimise hindrance
- ▶ The dorsal attachment point is made from steel.
- ▶ Two opening quick release buckles (one per leg loop) enable the harness to be easily fitted even with cumbersome footwear.
- ▶ A FLAT LINK connector allows the shoulder straps to be easily connected to the lower part of the harness and is compatible with the HOLD UP chest ascender. Its flat working surface ensures the webbing is properly seated.
- ▶ 4 large, pre-shaped gear loops are positioned around the waist belt to easily accommodate equipment.
- ▶ Mini gear loops compatible with item of the WorkStation.



Hero Pro Hold up S : BHPHO.1
Hero Pro Hold up M-L : BHPHO.2
Hero Pro Hold up XL : BHPHO.3

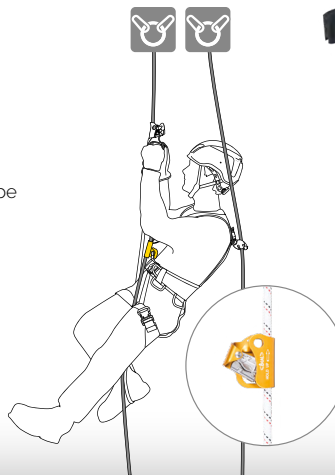

DATA



ROPE ACCESS AND WORK POSITIONING HARNESSES

HERO SIT

Work positioning and rope access harness.

Strengths :

- ▶ The semi-rigid leg loops and waist belt assure optimal pressure distribution where the body is in contact with the harness.
- ▶ The waist belt and leg loops are lined with a breathable foam, increasing comfort and reducing perspiration.
- ▶ The waist belt's two lateral attachment loops are articulated to minimise hindrance.
- ▶ Two double action opening quick release buckles (one per leg loop) enable the harness to be easily fitted even with cumbersome footwear.
- ▶ The rear of the waist belt contains an area to allow personal marking such as your company's name.
- ▶ 3 large, pre-shaped gear loops are positioned around the waist belt to easily accommodate all equipment.
- ▶ 4 mini gear loops can be used to attach 'AIR-LEASH' extendable tool holders or 2 'TOOL-BUCKET' tool pouches.
- ▶ Compatible with the AIR TOP and YPSILON chest harness to create a full body harness EN 361.

Hero sit S : BHPHS.1
Hero sit M-L : BHPHS.2
Hero sit XL : BHPHS.3



HERO SIT + AIR TOP

HERO SIT + YPSILON

SHAOLIN


A lightweight fall arrest and work positioning harness.

Strengths :

- ▶ This harness benefits from new technology in the PRO range: WEB CORE technology provides exceptional levels of comfort thanks to optimal pressure distribution on hips and thighs. WEB CORE is a wide, thin and lightweight piece of webbing laser cut to the shape of the harness. This results in a more compact, lightweight and above all more comfortable harness.
- ▶ Its ergonomic construction allows a large range of movement.
- ▶ The low position of the ventral attachment point yields maximum progression when ascending ropes, whilst its large diameter provides the space for multiple connection to be made i.e. ascenders, connectors, descender and lanyards.
- ▶ Two ways of attaching equipment:
 - A large ring provides the space for multiple karabiners and lanyards to be connected and accessed easily during a rescue.
 - Two textile attachment points for connecting lanyards metallic devices on both sides of the ring.
- ▶ 2 lateral attachment points EN 358.
- ▶ 1 dorsal attachment point for winching.
- A handle can be fitted at the back for rescue use.
- ▶ 5 gear organisers, 4 gear loops and 6 fabric loops to connect parts of the WORK STATION range.
- ▶ Replaceable rear elastics on leg loops.
- ▶ Traceability via an identification area.
- ▶ Compatible with the AIR TOP and YPSILON chest harness to create a full body harness EN 361.



Shaolin S : BHPSH.1
Shaolin M-L : BHPSH.2
Shaolin XL : BHPSH.3

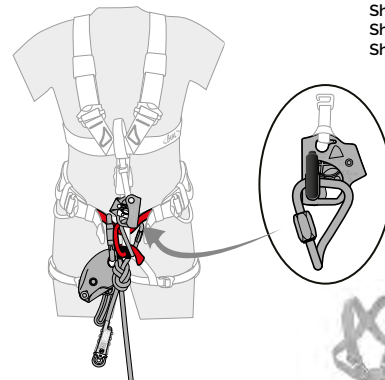

SHAOLIN + AIR TOP

SHAOLIN + YPSILON

RESCUE HARNESS

DRAGON

A lightweight rescue harness. When combined with the DRAGON TOP it can be used for fall arrest and work positioning.

Strengths :

- ▶ Padded legloops for good position and comfort
- ▶ Different legloop colour for ease of fitting (left:yellow/right:black)
- ▶ Two textile lateral attachment on the belt for evacuation (EN358)
- ▶ One yellow rear attachment on the belt for evacuation
- ▶ Four gearloops, two straps to hold tools and six mini gearloops compatible with WORKSTATION
- ▶ Compatible with DRAGON TOP to create a full harness



DRAGON
+ TOP DRAGON

Dragon S-M : BHPD1
Dragon L-XL : BHPD2

TRI-ANGEL

Evacuation triangle for vertical rescues.

Strengths :

- ▶ Straightforward positioning using 2 adjustable straps.
- ▶ The straps, which are a different colour to the rest of the triangle, assist with both the ease and

speed of deployment of the TRI-ANGEL onto the casualty.

- ▶ The TRI-ANGEL adjusts in size to match the casualty using a webbing positioning scale with 3 settings.
 - ▶ Marked with a unique serial number.
- Includes an area to allow personal marking such as your company's name.



BHPTA

HARNESS ACCESSORIES

TOP DRAGON

Lightweight, adjustable Y-shaped torso compatible with DRAGON harnesses for a complete harness. Easy to put on and comfortable, it keeps the operator in a upright position in case of a fall. Two fall arrest attachment points: sternal and dorsal.

Strengths :

- ▶ Dorsal attachment point in textile in order to reduce the damage in confined environment
- ▶ Shoulder with narrow part in order to reduce the friction on the neck area
- ▶ Gear loops on each shoulder
- ▶ Dedicated attachment on each shoulder top for a vertical evacuation
- ▶ Webbing to maintain chest ascender in an upright position



BHPTD

AIR TOP

Adjustable chest harness with figure of 8 shape for use with a HERO SIT or SHAOLIN sit harness. This comfortable harness ensures the user remains in an upright position during a fall.

Strengths :

- ▶ Figure of 8 shape provides freedom of movement and distributes pressure around the chest evenly.
- ▶ 2 adjustment buckles to adjust the length of the shoulder straps.
- ▶ A single adjustment buckle allows the sternal attachment point to be correctly positioned in relation to the user, regardless of their physique.
- ▶ A reinforced webbing fall arrest attachment point is ideal in confined spaces allowing progression without hindrance.
- ▶ Can easily be fitted with an elastic positioning strap for the chest ascender.
- ▶ Large elastic retainers help tidy the chest ascender's webbing.



BHAT

YPSILON

Lightweight and adjustable Y-shaped chest harness compatible with HERO SIT and SHAOLIN sit harnesses. Comfortable and easy to fit, it ensures the user remains in an upright position during a fall.

Strengths :

- ▶ Lightweight
- ▶ Adjustments are made using a front buckle at shoulder height and a dorsal rear buckle.
- ▶ The shoulder strap slides through the sternal D-ring which provides a large range of movement and ensures ease of fitting.
- ▶ A slight narrowing of the shoulder straps prevents chafing around the neck.
- ▶ Multiple attachment points for the elasticated chest ascender retainer.
- ▶ Two reinforced loops per shoulder strap can be used to attach scaffolding hooks.



BHPY

DATA



DATA



QUANTUM

NEW2021

Light helmet featuring an ABS shell with a polystyrene liner for optimal energy absorption in case of impact. Its chinstrap opens between 15 and 25 daN in order to avoid strangulation. Certified EN 397.



BKPQW

BKPQY

BKPQO

Strong points :

- ▶ Very good ventilation thanks to its 8 openings. The position and the shape of the opening prevent from letting the water in.
- ▶ Its setting up is extremely easy and user friendly.
- ▶ 2 different systems to use a headlamp :
 - 4 hooks to attach the headlamp's band
 - 2 dedicated slots (1 in the front, 1 in the back) to slide in the headlamp.
- ▶ Certified against lateral deformation and low temperature: -40°C.


Compatible accessories :

- ▶ Visor (QUANTUM VISOR) and visor protection (QUANTUM V PROTECT).
- ▶ Card holder (QUANTUM CARD HOLDER) that can be slide in the slots at the front and the back.
- ▶ Neck protection (QUANTUM NECK PROTECT).
- ▶ Reflective Stickers (QUANTUM STICKERS).

QUANTUM ELEC

NEW2021

Light helmet featuring an ABS shell with a polystyrene liner for optimal energy absorption in case of impact. Its chinstrap opens between 15 and 25 daN in order to avoid strangulation. Certified EN 397 and EN 50365 against electrical hazards.



BKPQE

Strong points :

- ▶ Its setting up is extremely easy and user friendly.
- ▶ 2 different systems to use a headlamp :
 - 4 hooks to attach the headlamp's band
 - 2 dedicated slots (1 in the front, 1 in the back) to slide in the headlamp.
- ▶ Certified against lateral deformation and low temperature: -40°C.

Compatible accessories :

- ▶ Visor (QUANTUM VISOR) and visor protection (QUANTUM V PROTECT).
- ▶ Card holder (QUANTUM CARD HOLDER) that can be slide in the slots at the front and the back.
- ▶ Neck protection (QUANTUM NECK PROTECT).
- ▶ Reflective Stickers (QUANTUM STICKERS).

QUANTUM VISOR

NEW2021

Eye visor compatible with QUANTUM and QUANTUM ELEC helmets. This visor can be protected from scratches with a visor protector.



BKPQVS

QUANTUM V PROTECT

NEW2021

Visor protector, compatible with QUANTUM VISOR for QUANTUM and QUANTUM ELEC helmets. Avoids the visor from scratching when it is not in use.



BKPQVP

QUANTUM NECK PROTECT

NEW2021

Textile neck protector compatible with QUANTUM and QUANTUM ELEC helmets. Its covering shape protects from the sun and rain.



BKPQNP

QUANTUM STICKERS

Reflective Stickers.

NEW2021



BKPQS

QUANTUM CARD HOLDER

NEW2021



BKPQC

SKYFALL

Ultra-light helmet in ABS material with internal suspended harness and polystyrene reinforcement for optimal energy absorption in case of impact. Its chinstrap opens between 15 and 25 daN in order to avoid strangulation. Certified EN 397.

Strengths :

- ▶ Micro-adjustable thanks to a precise adjustment dial
- ▶ Adjustable chinstrap with Quick-release buckle.
- ▶ 4 Headlamp clips are integrated into the shell.
- ▶ Slots for ear protector fixing.
- ▶ Internal comfort padding is removable and machine washable.
- ▶ Security device release system between 15 and 25 daN in order to avoid strangulation.



BKPSY

BKPSR

SKYFALL ELEC

Ultra-light helmet in ABS material with internal suspended harness and polystyrene reinforcement for optimal energy absorption in case of impact. Its chinstrap opens between 15 and 25 daN in order to avoid strangulation. Certified EN 397 and EN 50365 against electrical hazards.

Strengths :

- ▶ Micro-adjustable thanks to a precise adjustment dial
- ▶ Adjustable chinstrap with Quick-release buckle.
- ▶ 4 Headlamp clips are integrated into the shell.
- ▶ Slots for ear protector fixing.
- ▶ Internal comfort padding is removable and machine washable.
- ▶ Security device release system between 15 and 25 daN in order to avoid strangulation.



BKPSW

BKPSBK

MERCURY

Hybrid helmet featuring an ABS shell with a polystyrene liner.

Strengths :

- ▶ Micro-adjustable thanks to a precise adjustment dial.
- ▶ Large volume of the hull for optimum comfort and protection.
- ▶ Very good ventilation. 4 hooks to attach a headlamp are integrated into the helmet.
- ▶ Lateral perforations for fixation of hearing protection.
- ▶ Resistance of the chinstrap to 50 daN to avoid the loss of the helmet in case of shock.
- ▶ A magnetic closure of the chinstrap buckle for easy positioning and release even with gloves and one hand.
- ▶ Removable and machine washable internal comfort foams.



BKM.O

BKM.BK

BKM.W

BKM.R



INTERNAL COMFORT PADDING MERCURY

Internal comfort padding is removable and machine washable.



BKFM

	PROTECTION AGAINST MECHANICAL IMPACTS	VENTILATION	ELECTRICAL INSULATION	OPEN CHINSTRAP BETWEEN 15 DAN AND 25 DAN	OPEN CHINSTRAP OVER 50 DAN	MOLTEN METAL SPLASH	LATERAL DEFORMATION	T°C mini-maxi
QUANTUM EN 397	✓	✓	-	✓	-	✓	✓	-40°C / +50°C
QUANTUM ELEC EN 397 + EN 50365	✓	-	✓	✓	-	✓	✓	-40°C / +50°C
SKYFALL EN 397	✓	-	-	✓	-	✓	✓	-40°C / +50°C
SKYFALL ELEC EN 397 + EN 50365	✓	-	✓	✓	-	✓	✓	-40°C / +50°C
MERCURY EN 12492	✓	✓	-	-	✓	-	-	-20°C / +35°C

DATA



O'LIGHT

BMCLOL



Symmetrical aluminium oval shaped connector for use with equipment with swivelling side plates such as pulleys, rope clamps, mobile fall arrest devices, etc..

O'LIGHT 3 MATIC

BMCLOL3



Symmetrical aluminium oval shaped connector for use with equipment with swivelling side plates such as pulleys, rope clamps, mobile fall arrest devices, etc..

BE QUICK

BMCLBQ.col



Carabiner particularly suitable for frequent use as it is easy and quick to lock and unlock. It is very effective during repetitions of maneuvers on anchor.

Colours: Blue (B), Green (G), Orange (O)

BE LINK

BMCLBLN



Asymmetrical aluminium connector for lanyards or for use with belay devices. The asymmetrical shape helps to guide the device towards the connector's apex.

BE LINK BI MATIC

BMCLBLN2

NEW 2021



Asymmetrical aluminium connector for lanyards or for use with belay devices. The asymmetrical shape helps to guide the device towards the connector's apex.

BE LINK 3 MATIC

BMCLBLN3



Asymmetrical aluminium connector for lanyards or for use with belay devices. The asymmetrical shape helps to guide the device towards the connector's apex.

BE LOCK

BMCLBL



Symmetrical aluminium screw gate connector with large capacity and opening to accommodate multiple items. Its generous loading surface and HMS shape facilitate its use with Clove and Italian hitches.

BE LOCK 3 MATIC

BMCLBL3



Symmetrical aluminium screw gate connector with large capacity and opening to accommodate multiple items. Its generous loading surface and HMS shape facilitate its use with Clove and Italian hitches.

FLAT LINK 3 MATIC

BMCLFL



Symmetrical, trapezoidal shaped aluminium karabiner designed to connect the top and bottom parts of a full body harness. Its flat working surface ensures the webbing is properly seated. The FLAT LINK was designed to be compatible with the HOLD UP chest ascender.

O'SMITH

BMCLOS



Symmetrical oval shaped steel connector.

O'SMITH 3 MATIC

BMCLOS3



Symmetrical oval shaped steel connector.

AIR-SMITH

BMCLAS



High capacity asymmetrical steel connector with large opening to assist with connections to metal anchors. Its capacity allows it to accommodate multiple items.

AIR-SMITH 3 MATIC

BMCLAS3



High capacity asymmetrical steel connector with large opening to assist with connections to metal anchors. Its capacity allows it to accommodate multiple items.

TWIN O

BMTCO



An oval automatic locking karabiner designed for use with equipment with swivelling side plates such as pulleys and descenders. The TWIN O is equipped with the TWIN-GATE concept and its two opposing gates. The absence of a traditional locking barrel reduces the potential of the karabiner becoming incorrectly positioned.

TWIN SMITH CAPTIVE

BMCTSC



A large capacity and high strength (45kN) asymmetrical steel locking karabiner. The TWIN SMITH CAPTIVE features the TWIN-GATE concept with a second wire gate that opens in the opposite direction.

QUICK LINKS



- | | | |
|---|-----------------------------|-----------------|
| 1 | STANDARD GALVA 8 mm | BMMNZ08 |
| 2 | STANDARD GALVA 10 mm | BMMNZ10 |
| 3 | LONG OPENING GALVA 7 mm | BMMGOZ07 |
| 4 | PEAR GALVA 10 mm | BMPMPZ10 |
| 5 | DELTA GALVA 8 mm | BMMDZ08 |
| 6 | DELTA GALVA 10 mm | BMMDZ10 |
| 7 | MAILLON SEMI CIRCULAR 10 mm | BMMSCZ10 |
| 8 | DELTA TWIST 9 mm | BMMDTZ09 |

AIR-HOOK LARGE

Auto-locking aluminium connector with large opening. Ideal for connections to cables, bars and beams.



BMC60

AIR-HOOK XL

Auto-locking aluminium connector with very large opening.



BMC110

RIGGING PLATES AND SWIVEL

AIR-PORT 4

Aluminium rigging plate which can accommodate 4 connectors.

Strengths :

- ▶ 20 mm holes allow connectors with locking barrels to be inverted easily.
- ▶ Individual serial number.



BMAP4

AIR-PORT 8

Aluminium rigging plate which can accommodate 8 connectors.

Strengths :

- ▶ 20 mm holes allow connectors with locking barrels to be inverted easily.
- ▶ Individual serial number.



BMAP8

TWIST'AIR B

Compact aluminium swivel with ball bearings to optimise performance even when loaded.

Strengths :

- ▶ Individual serial number.
- ▶ Ball Bearings.



BMSW

PULLEYS

TRANSF'AIR 1

Large single pulley with swivelling side plate. Stainless steel axle and washer. The sheave is mounted onto a bronze collar to promote a good level of efficiency. Maximum $\varnothing \leq 16$ mm.



BMP1

TRANSF'AIR 1B

Highly efficient single pulley with swivelling side plate and ball bearing mounted sheave. Its swivelling action allows the pulley to be positioned anywhere along the rope, whilst the ball bearings ensure maximum efficiency and durability. Ideal for intensive use with large rope diameters. Stainless steel axle and washers.



BMP1B

TRANSF'AIR 2

Large double pulley with swivelling side plate well suited for use in pulley systems. Stainless steel axle and washer. The sheave is mounted onto a bronze collar to promote a good level of efficiency. Maximum $\varnothing \leq 16$ mm.



BMP2

TRANSF'AIR 2B

Highly efficient double pulley with swivelling side plates thanks to a ball bearing mounted sheave. Its swivelling action allows the pulley to be positioned anywhere along the rope, whilst the ball bearings ensure maximum efficiency and durability. Ideal for intensive use with large ropes diameters. Stainless steel axle and washers.



BMP2B

TRANSF'AIR MINI

Compact and lightweight pulley with swivelling side plate. Stainless steel axle and washer. The sheave is mounted onto a bronze collar to promote a good level of efficiency. Maximum $\varnothing \leq 11$ mm.



BMPMINI

TRANSF'AIR FIXE

Compact and lightweight pulley with fixed side plates. Stainless steel axle and washer. The sheave is mounted onto a bronze collar to promote a good level of efficiency. Maximum $\varnothing \leq 12$ mm.



BMPF

TRANSF'AIR FIXE B

Pulley with fixed side plates and ball bearings for optimal efficiency. Its compact and lightweight nature make it easy to handle. Allows a pulley system to be set up by adding a component such as an ascender. Maximum $\varnothing \max \leq 13$ mm.



BMPFB

TRANSF'AIR TWIN B

A double pulley with two inline stainless steel sheaves mounted on ball bearings. The TRANSF'AIR Twin B is specifically designed for intensive use on rope or wire zip lines.



BMPTB

DATA




DATA

AIR STOP

Auto-block descender with anti panic function for a single rope.

Strengths :

- ▶ Maximum working load of 130 kg with 9 mm rope, and up to 200 kg with ropes from 10 to 12 mm.
- ▶ Anti-panic function with 2 blocking positions.
- ▶ The maximum authorised speed of descent is 2 m/s.
- ▶ Useable on a wide spread of rope diameters from 9 to 12 mm (EN12841-C).
- ▶ Long control lever for a more progressive feel.
- ▶ Rope can be inserted into device without unclipping it.
- ▶ Unique serial number.

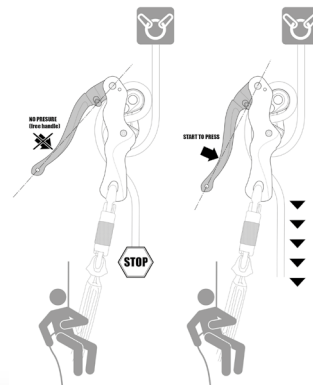


BMDAS

D4


Self-blocking, anti-panic descender manufactured entirely of metal for greater durability, height work and rescue.

Strengths :

- ▶ Two levels of security: The panic-triggering function immediately stops the descent.
- ▶ When the user lowers the handle too abruptly; and the descent automatically stops as soon as the user drops the handle.
- ▶ The very thick metal at the friction points ensures a long life in intensive use.
- ▶ The handle allows for very precise control of the speed during descent and its 360-degree rotation facilitates its use. It is made of aluminum and is coated with a material that increases adhesion. In addition, the rotation of the handle is accompanied by audible clicks that help the user identify the correct position of the handle.
- ▶ Locking the device with a metal button makes it impossible to unintentionally open the device in the event of a rope lift.
- ▶ The progression on a horizontal or low angled plane is facilitated by a simple manipulation of the cam with the thumb.
- ▶ The maximum workload of the D4 is 240kg. It is therefore suitable for 2-person rescue manoeuvres, without the need for additional friction.
- ▶ The D4 can be used on ropes 10.5 to 11.5mm in diameter.

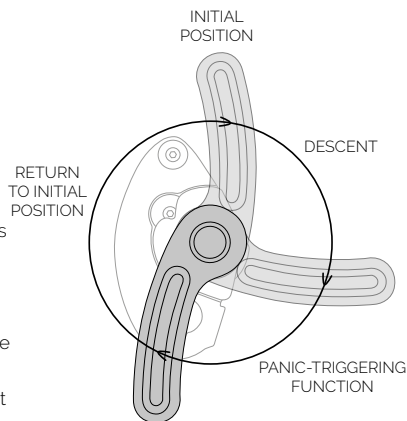


BMD4

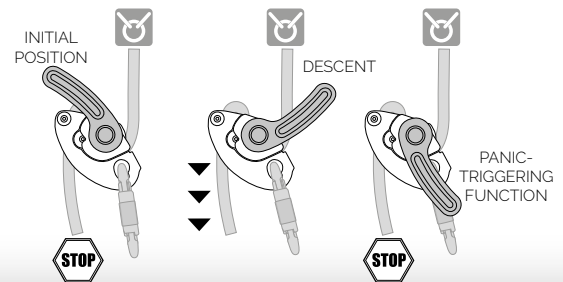

AIR FORCE 8

Classic, robust and easy to use belay device. It is compatible with a large range of rope diameters whether single, double or twin. The friction can easily be varied whatever the condition of the ropes (frozen, wet, different diameters..).

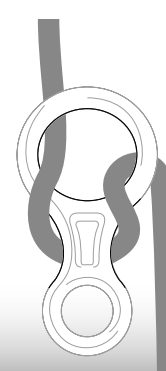


BMDAF8

MONITOR

Aluminium mobile fall arrest device with swivelling side plate.

Strengths :

- › Mobile fall arrest device with camming action. Cam function reduces abrasion to the rope when activated.
- › Meets the requirements of the following standards: EN 353-2, EN 12841-A 100 Kg diameter 11-13 mm (EN1891).
- › Rescue : maximum 200 kg, \varnothing 11-13 mm.
- › Swivelling side plate allows for ease of installation on the rope.
- › A lateral brake converts the MONITOR into a rope clamp for work positioning.
- › Easily locks as a result of a fall.
- › Easily follows the operator both during ascent and descent.
- › Marked with a unique serial number.
- › The MONITOR can be complemented with a MOBILE-LANYARD and its 2 attachment points.

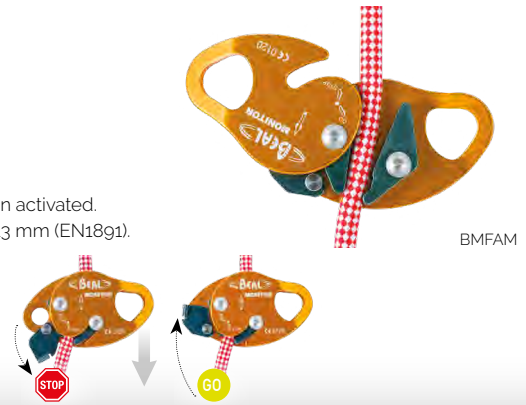


MOBILE-LANYARD

Lanyard with 2 attachment points. The MOBILE-LANYARD is certified to work with the MONITOR mobile fall arrest device, enabling it to be positioned away from the operator. Allows the operator to create a short or longer link dependant on their needs: Short link for work on a gentle slope or to limit the length of a fall (20 cm). Longer link to distance the rope from the operator and to gain freedom of movement (40 cm).

Strengths :

- › Includes two PINCH's to ensure the correct orientation of the connector at its extremity.
- › Marked with a unique serial number.

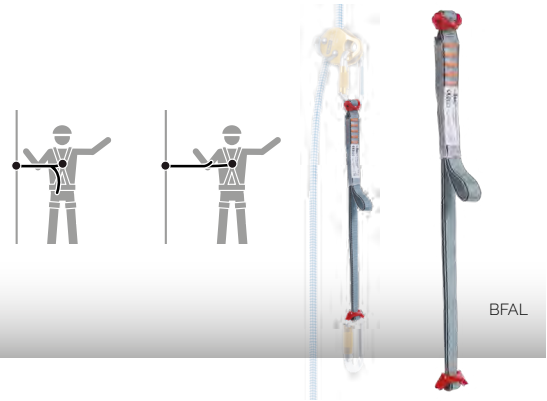

AIR-KIT 11mm


Specific kit to create a mobile fall arrest system (EN 353-2 and EN12841-A 100 Kg) especially adapted to vertical work or work on inclined surfaces.

Kit includes :

- › A MONITOR mobile fall arrest device.
- › A MOBILE-LANYARD with 2 positions: 20 cm and 40 cm.
- › 2 O'LIGHT 3-MATIC connectors to attach the lanyard to both the MONITOR and the harness.
- › Connectors: two O'LIGHT 3-MATIC and one BE LOCK 3-MATIC.
- › A length of rope 10 m / 15 m / 20 m / 30 m / 50 m / 60 m with a
- › 11 mm diameter with sewn termination protected by a reinforced eye.
- › 1 BE-LOCK 3-MATIC connector to attach the rope to the anchor point.

Strengths :

- › Removable cover allows the inspection of termination stitches
- › Products marked with a unique serial number and equipped with a label to accommodate personal markings.
- › Each length is represented by a colour for quick and efficient identification of both its length and diameter.

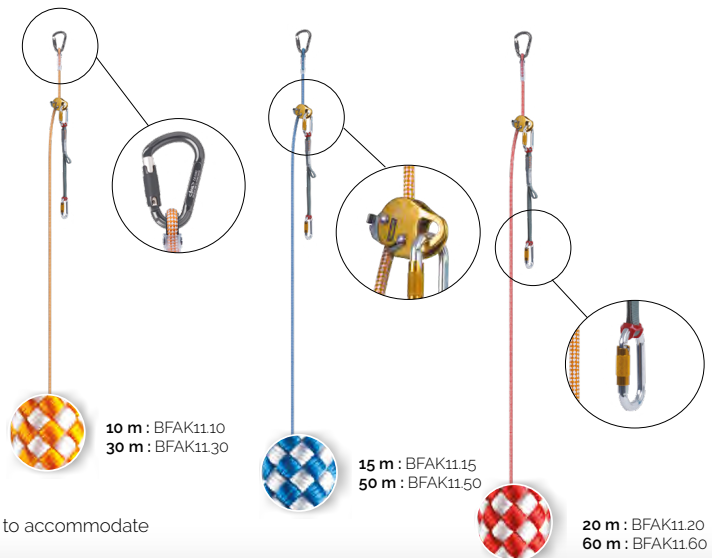

SOFT AIR KIT NEW2021


100% textile fall protection kit developed for work on fragile surfaces in a vertical or inclined environment.

Pre-assembled kit including :

- › a 10m rope length, 11mm in diameter with two sewn terminated rope endings.
- › an 8mm VOLCANO Prusik acting as a rope clamp.
- › one BE LOCK 3MATIC karabiner to connect the rope to the anchor point.
- › one O'LIGHT 3MATIC to connect to the harness.

Strengths :

- › Textile rope clamp protects sensitive surfaces from damage (roofs, solar panels, glass surfaces, etc.).
- › The self-locking prusik works in both directions.

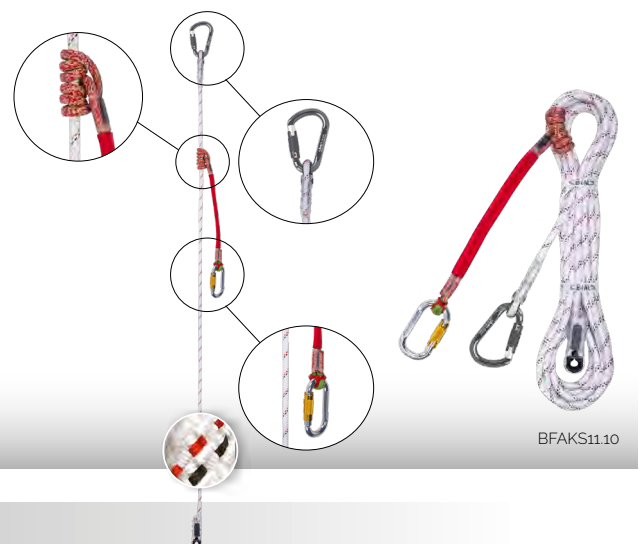

DATA




DATA

HANDS UP

Handled ascender with ergonomic design to aid rope ascents with one or two hands.

Strengths :

- ▶ Can be used to compliment the HOLD UP chest ascender or any other ascender for rope ascents
- ▶ Large lower attachment hole easily accommodates the connector for the AIR STEP foot loop.
- ▶ The ascender's shape allows it to be held with two hands when ascending rope: one on the side beneath the trigger and one above it.
- ▶ The handle is reinforced to improve ergonomics and comfort.
- ▶ Large lower attachment hole can accommodate multiple karabiners and mailons.
- ▶ All-metal construction of the operating mechanism to increase durability
- ▶ An ergonomic protruding lever facilitates cam operation.

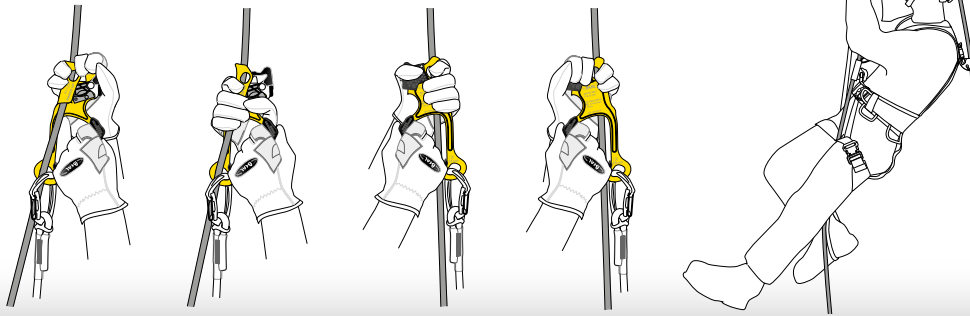

BMBHAR

HOLD UP

A compact ventral ascender for ascending ropes

Strengths :

- ▶ The attachment hole protrudes from the ascender's body at a 90 degree angle. This ensures the device remains both upright and parallel to the user's body and allows the rope to easily slide through the device.
- ▶ Positioned low on the harness to maximise progression with every move.
- ▶ All-metal construction of the operating mechanism to increase durability.
- ▶ An ergonomic protruding lever facilitates cam operation.
- ▶ Compatible with all PRO harnesses through the use of a FLAT LINK connector, which connects the harness to the ascender.



BMBHO

TRACT UP

Compact emergency rope clamps

Compatibility - 8 in 11mm
 Charge with maximal use in mode blocker: 2,5kN
 Breaking load in mode blocker: 4kN
 Materials: aluminum, stainless steel and silicone.

Duration of storage - 5 years
 Operating life - 10 years



Strengths :

- ▶ Allows the recovery and the lifting of light loads
- ▶ Blocker of useful repair during laborers(operations) of mouflage and help
- ▶ In help: back up line glide in 250 kg


BMTR

AIR-STEP

Adjustable footloop with quick adjusting system around the foot for ascending fixed ropes with an ascender.

Strengths :

- ▶ Quick adjusting system with ON / OFF function. In the ON position, the user's foot stays locked in the footloop. In the OFF position, the adjustment system does not engage, meaning the user's foot is not locked.
- ▶ A large buckle facilitates adjustments of the footloop, even when wearing gloves.
- ▶ A stiffener in the loop helps to place a foot inside it.
- ▶ Reinforced with webbing to help protect against abrasion.

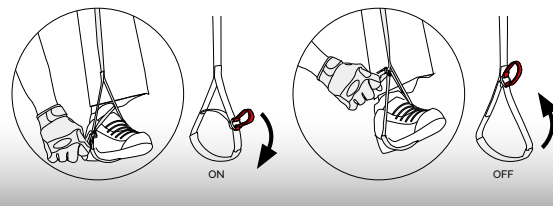

BSTEP

PRO RESCUE 40

Rescue bag ideal for rapid access operations. Capable of taking 30 metres 12.5 mm of rope and basic hardware.

Capacity	Weight	Height	Width
40 L	900 g	60 cm	30 cm



BMBH BSAC.PR40 AR

PRO RESCUE 60

Rescue bag ideal for rapid access operations. Capable of taking 60 metres 12.5 mm of rope and basic hardware.

Capacity	Weight	Height	Width
60 L	1000 g	60 cm	35 cm



BSAC.PR60

PRO WORK 35 CONTRACT

35 litre transport bag – simple and effective.

Capacity	Weight	Height	Width
35 L	735 g	70 cm	30 cm



BSAC.PW35C

PRO WORK 35

35 litre ergonomic transport bag including a waterproof external pocket.

Capacity	Weight	Height	Width
35 L	1080 g	70 cm	30 cm



BSAC.PW35

PRO WORK 45

Large 45 litre capacity transport bag specially adapted to heavy load carrying. A comfortable belt complements the ergonomic shoulder straps and a padded back. Waterproof exterior pocket and large under-lid pocket to cater for smaller personal items as well as lifetime record sheets. A transparent window aids in identification.

Capacity	Weight	Height	Width
45 L	1525 g	78 cm	30 cm



BSAC.PW45

PRO WORK 60

Very large 60 litre capacity transport bag with wide, stiff opening well adapted to rescue and large volume carrying requirements. A large waterproof transparent window allows you to see the sac contents. 2 very strong carrying handles help with handling heavy loads.

Capacity	Weight	Height	Width
60 L	1825 g	75 cm	35 cm



BSAC.PW60

COMBI PRO 40

Bag for professionals who require quick and easy access to their kit.

Capacity	Weight	Height	Width
38 L	1960 g	72 cm	21 cm



BSAC.CP40.BK

COMBI PRO 80

Bag for professionals who require a large volume, yet maintaining quick and easy access to their kit.

Capacity	Weight	Height	Width
45 L	2500 g	72 cm	26 cm



BSAC.CP80.BK



DATA

GENIUS SIMPLE & TRIPLE

Bags for carrying small tools and fastenings.
The clic clac express closure stops the pocket contents getting lost.
A magnetic plate allows temporary storage on the outside of the pocket.
Available as a single pocket and an assembly of 3 with external tool carriers.

Strengths :

- ▶ Express closure.
- ▶ Easy to attach to the harness.
- ▶ Rigid opening.
- ▶ Magnetic plate.

	Capacity	Weight	Height	Width	Max. load
Simple	1.5 L	180 g	25 cm	15 cm	50 kg
Triple	4.5 L	560 g	75 cm	45 cm	150 kg



GENIUS BUCKET

A 20 litre bucket for carrying tools as well as small screws and fittings thanks to the 3 GENIUS CLIC CLAC pockets attached to the inside.
The large opening with stiffener allows easy access to its contents.

Strengths :

- ▶ Easy, convenient access to tools.
- ▶ CLIC CLAC pocket closure system.
- ▶ Rigid carrying handle, with a minimum breaking load of 100kg
- ▶ Waterproof pocket.
- ▶ Reinforced base.

Capacity	Weight	Height	Width	Max. load
20 L	1085 g	40 cm	40 cm	50 kg



GENIUS TOOL BUCKET

A rigid 20 litre bucket for power tools such as a hammer drill, electric screwdriver or angle grinder; constructed with a clever 'twist and fold' function to reduce size for storage. Small gear loops on the outside and inside edges of the bag can be used to attach small CLIC CLAC pockets (TOOL BUCKET, GLASS BUCKET, LONG TOOL BUCKET) to organise your work station as you wish.

Strengths :

- ▶ Easy, convenient access to tools
- ▶ Additional BUCKETs can be added
- ▶ Rigid carrying handle with a minimum breaking load of 100kg
- ▶ 'twist and fold' function to reduce size for storage
- ▶ Comfortable and adjustable shoulder strap helps to carry the bucket
- ▶ Waterproof pocket
- ▶ Reinforced base

Capacity	Weight	Height	Width	Max. load
20 L	1085 g	40 cm	40 cm	50 kg



BUCKET HAT

A removable lid for the GENIUS BUCKET PLUS. Designed to protect items inside the GENIUS BUCKET PLUS from bad weather, dust etc. and to restrain the contents during transit and whilst hauling.

Fitted using clips.



BSAC.BH

GLASS BUCKET

A small transparent bucket for organising bolts, screws and other small items whilst leaving contents easily visible.

The CLIC CLAC system can be used to quickly close the bag and prevents loss of contents during transport.

2 external mini karabiners are fitted to connect the GLASS BUCKET to the GENIUS BUCKET, HERO PRO, SYNCRO and STYX harness or to the AIR-SIT work seat.

Capacity	Weight	Height	Width
1,8 L	115 g	14 cm	16 cm



TOOL BUCKET / TOOL BUCKET L

Medium size tool organiser bucket.

The CLIC CLAC system can be used to quickly close the bag and prevents loss of contents during transport.

Two mini external gear loops can be used to connect the BEAL AIR-LEASH extendable gear holder. Two external mini karabiners can be used to connect the TOOL-BUCKET either to the HERO PRO, SYNCRO and STYX harness or to the AIR-SIT work seat.

	Capacity	Weight	Height	Width
Tool Bucket	3,4 L	180 g	25 cm	16 cm
Tool Bucket L	5 L	215 g	35 cm	16 cm



TOOL BELT

A waist belt with small gear loops for use with the TOOL BUCKET, LONG TOOL BUCKET, GLASS BUCKET, AIR LEASH and ATTRAC'TOOL.

Webbing gear loops positioned around the belt allow the tools to be secured where convenient. The belt is reinforced to help spread out the weight of the tools on the waist.

Mini waist measurement	Maxi waist measurement	Width	Weight
70 mm	130 mm	50 mm	190 g



ATTRAC'TOOL

A magnetic plate that allows you to temporarily attach a leash secured tool to an appropriate metal surface.

The ATTRAC'TOOL can be fixed to a belt or shoulder strap of the HERO PRO harness or to the small gear loops of a harness, BUCKET or TOOL BELT.

When fitted to a harness' waist belt, a strap can be clipped around the thigh to stop the magnet from lifting up when picking up the tool. The strap can also be used to hang the ATTRAC'TOOL from a railing.


The ATTRAC'TOOL is modular and can be positioned both vertically and horizontally depending on the tools used and the working environment.



AIR LEASH

An extendable gear loop allowing tools to remain attached whilst in use.

Minimum length	Weight	Max length with 500g load	Max. load
45 cm	55 g	150 cm	500 g

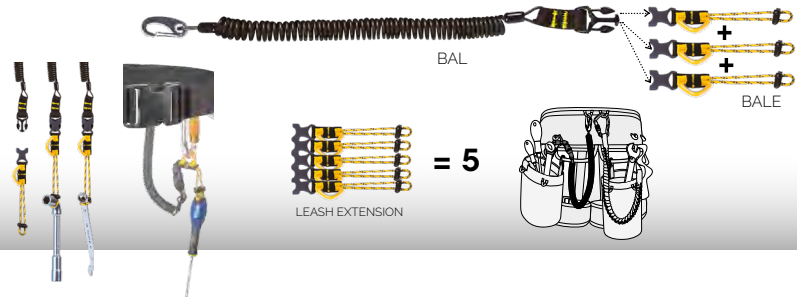


SUPER LEASH

A webbing based extendable gear loop allowing tools to remain attached whilst in use.

One end can be used to attach tools by means of a girth hitch or slipknot (it is important you select an attachment method appropriate for the specific tool). The other end is equipped with a screwgate mini-karabiner for attachment to a tool pouch or gear loop.

Minimum length	Weight	Max length with 10kg load	Max. load
70 cm	70 g	115 cm	10 kg

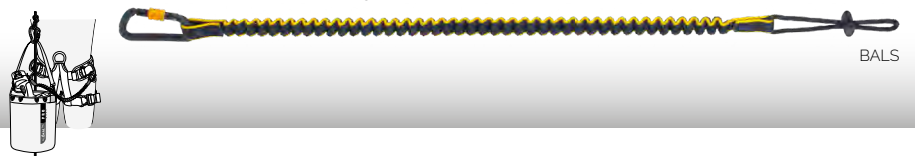

DATA

FALL ARREST KIT 10 m STYX

A complete pre-assembled solution to protect against falls from height, it includes :

- A Mobile Fall Arrest device, called the Monitor, which comes with a block mode.
- A Mobile-Lanyard for the MONITOR with the option of 2-positions: 20 cm and 40 cm.
- 2 x O'Light 3 Matic karabiners to connect the mobile-lanyard: on one end to the Monitor, on the other end to the harness.
- 1 Be Lock 3 Matic karabiner to connect the rope to the anchor.
- A 10-metre 11mm Industry rope with a sewn termination in the rope end.
- A light STYX fall arrest harness with 2 attachment points: 1 sternal and 1 dorsal.
- A carry bag.



NEW 2021

=



+



BSAC.BH

FALL ARREST KIT 10 m STYX FAST

A complete pre-assembled solution to protect against falls from height, it includes :

- A Mobile Fall Arrest device, called the Monitor, which comes with a block mode.
- A Mobile-Lanyard for the MONITOR with the option of 2-positions: 20 cm and 40 cm.
- 2 x O'Light 3 Matic karabiners to connect the mobile-lanyard: on one end to the Monitor, on the other end to the harness.
- 1 Be Lock 3 Matic karabiner to connect the rope to the anchor.
- A 10-metre 11mm UNICORE Access rope with a sewn termination in the rope end .
- A light STYX FAST fall arrest harness with 2 attachment points: 1 sternal and 1 dorsal.
- Quick release buckles on the leg loops and a padded back allow for quick fitting.
- A carry bag.



NEW 2021

=



+



BSAC.BH

PROTECTOR


A rope can wear very rapidly over a sharp edge. To protect it, use the PROTECTOR, an ultra-solid rope protector made of two layers of coated material.



70 cm

150 g

BPR70



MAGNETIC PROTECTOR

Rope protector reinforced on both sides by a tape for better abrasion resistance. Installation facilitated by a magnetic closure.



70 cm

260 g

BPRM



HOT PROTECTOR


Made of glass fibre and aluminium, the HOT PROTECTOR is a patented rope protector resistant to heat, welding spatter, angle grinder, or a blowlamp flame - for a short time. Placement is facilitated by a magnetic closure.



70 cm

180 g

BPRH



ROPE DEFENDER

Flexible sleeve made from coiled steel which serves to protect ropes from sharp edges. Thanks to its flexibility, it adapts to all angles. The spirals that are in contact with the edge squeeze together under the rope's movement therefore ensuring total protection. The steel sleeve is virtually indestructible. Its reinforced rubber protecting cover exists as a separate part and may be easily replaced.



50 cm

730 g

BPRD



EDGE GUARD

Rope protector in stainless steel to protect a rope moving over a sharp edge.

Strengths :

- ▶ Modulable - can be linked together with maillon rapides.
- ▶ Secure with 2 cords (supplied).
- ▶ 2 side plates prevent the rope from leaving the rail.



300 g

BPREG

GLOVES

EN 420 / EN 388

EN 420 (2003) General requirements for protective gloves: safety, comfort and dexterity
EN 388 (2003) Protective gloves against mechanical hazards



ASSURE MAX

S, M, L, XL, XXL



BGAM.size

RAPPEL GLOVES

S, M, L, XL, XXL



BGA.size

ASSURE

S, M, L, XL, XXL



BGR.size

ROPE TECH GLOVES

S, M, L, XL, XXL



BGRT.size

BGRT.size.BK

HEADLAMPS

FF120



BEFF120.BK

A headlamp with 2 surprisingly powerful light sources in relation to its size: 120 lumens in maximum mode with an 120 m throw yet weighing in at only 96 g. «Continuous Power» in Medium mode.

FF210 R



BEFF210.BK

A powerful rechargeable headtorch able to simultaneously provide both close proximity lighting as well as long distance lighting. Its two buttons allow a second light source to be switched on and off independently whilst maintaining the first. The torch can be recharged using USB but equally works with AAA batteries. The FF210R uses Continuous Power for all its settings when used with the rechargeable battery.

ACCESSORIES

ROPE CLEANER




BRC

ROPE CUTTER




BCUT

ROPE MARKER




BRM

ROPE BRUSH



BRB

ROPE TAPE



BRT

NFC CHIPS




BNFC

MARKING TICKET KIT



BRE

MARKING TICKET KIT XL



BREP

DATA





BEAL

2, rue Rabelais - 38200 Vienne - FRANCE
Tel: +33 (0)4 74 78 88 88 - Fax: +33 (0)4 74 85 27 76

commercial@beal-planet.com
www.beal-planet.com

Non-contractual images. Drawing reserved for the exclusive use of BEAL.

Copyrights photos: ©Cyril Crespeau, ©Kyrre Buxrud, Hoyden AS,
123rf ©Georg Henrik Lehnerer, ©Keng Po Leung, ©narathip12, ©federicofoto
©Maxime GUIGUE @MADMAX studio,
Photos Products: ©Cyril Crespeau, ©Maxime GUIGUE @MADMAX studio,
Design: MADMAX studio.

Edited 02/2021.